Pebble Grey Dental Casework Templates - In Onyx			
Kit Number	Model(s)	Kit Includes:	
		Floor Template	Wall Template
002-0611-00	DM-SKL001	003-0965-00	003-0966-00
002-0611-01	DM-ASL00x and DM-DRL00x	003-0972-00	003-0973-00
002-0611-02	DM-RDR00x	003-0974-00	003-0975-00
002-0611-03	DM-RTR00x	003-0976-00	003-0977-00
002-0611-04	DM-SDL001	003-0978-00	003-0979-00
002-0611-05	DM-SDL002	003-0980-00	003-0981-00
002-0611-06	DM-SDL003	003-0982-00	003-0983-00
002-0611-07	DM-SDL010	003-0984-00	003-0985-00
002-0611-08	DM-SDL011	003-0986-00	003-0987-00
002-0611-09	DM-SDL012	003-0988-00	003-0989-00
002-0611-10	DM-SKR001	003-0990-00	003-0991-00
002-0611-11	DM-ASR00x and DM-DRR00x	003-0992-00	003-0993-00
002-0611-12	DM-RDL00x	003-0994-00	003-0995-00
002-0611-13	DM-RTL00x	003-0996-00	003-0997-00
002-0611-14	DM-SDR001	003-0998-00	003-0999-00
002-0611-15	DM-SDR002	003-1000-00	003-1001-00
002-0611-16	DM-SDR003	003-1002-00	003-1003-00
002-0611-17	DM-SDR010	003-1004-00	003-1005-00
002-0611-18	DM-SDR011	003-1006-00	003-1007-00
002-0611-19	DM-SDR012	003-1008-00	003-1009-00
Soniclean Templates			
9A299001	M150 Soniclean Template	003-1220-00	
9A300001	M250 Soniclean Template	003-1221-00	
9A301001	M550 Soniclean Template	003-1222-00	
Dental Op Equipment			
	Midmark Dental Chair Template	003-1199-00	
	J Box Floor Template	003-1134-00	

Go To Table Contents

Go To Table Contents

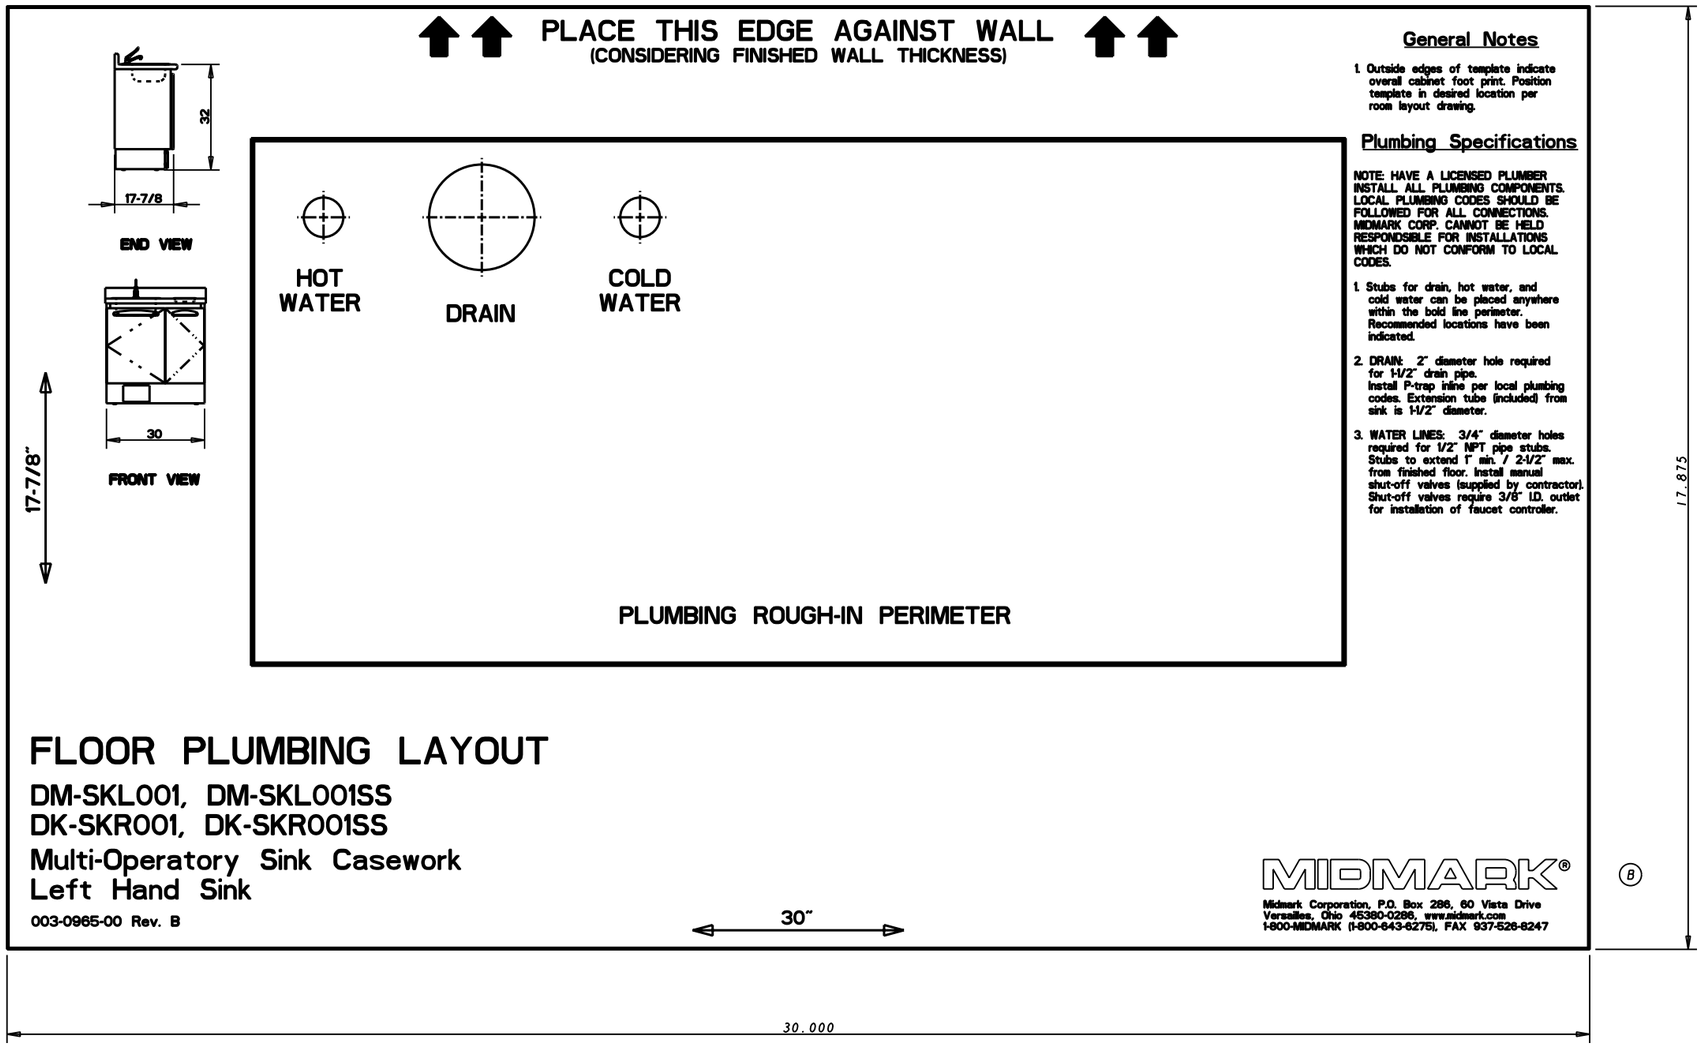

FLOOR PLUMBING LAYOUT

DM-SKL001, DM-SKL001SS
DK-SKR001, DK-SKR001SS
Multi-Operatory Sink Casework
Left Hand Sink

003-0965-00 Rev. B

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

NAME: DLANGENKAMP OBJECT: 003-0965-00_1 DATE: 18-Jul-01 09:39:17

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	6/30/00	MRH	ADD MODELS DK-SKR001SS, DM-SKL001, AND DM-SKL001SS. "MIDMARK" WAS "MOVED" by MIDMARK", REMOVE NOTE 3	B
M12933	10/29/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.750 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 15-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, FLOOR, DM-SKL001

PART NUMBER: 003-0965-00 | REV B

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)



END VIEW



FRONT VIEW

17-7/8"

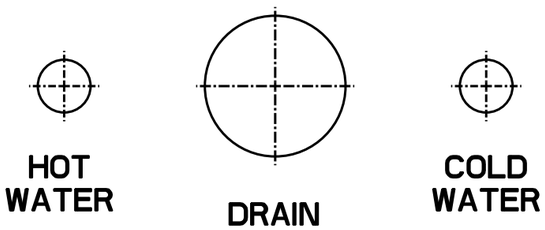

PLUMBING ROUGH-IN PERIMETER

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

SCALE 0.750

FLOOR PLUMBING LAYOUT

DM-SKL001, DM-SKL001SS
DK-SKR001, DK-SKR001SS
Multi-Operatory Sink Casework
Left Hand Sink

003-0965-00 Rev. B

30"

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0965-00_2 DATE:18-Jul-01 09:39:18

Go To Table Contents

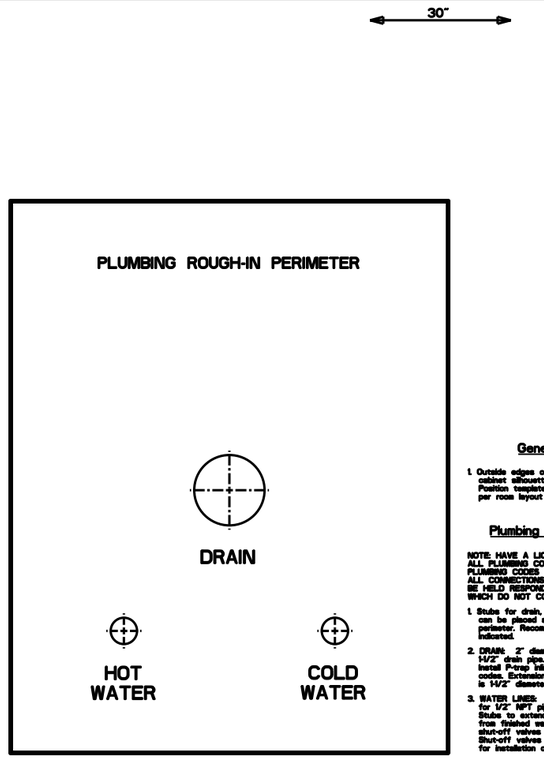

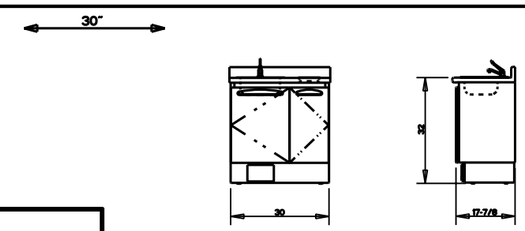

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

32"

32.000

WALL PLUMBING LAYOUT

DM-SKL001, DM-SKL001SS
DK-SKR001, DK-SKR001SS
Multi-Operatory Sink Casework
Left Hand Sink

003-0966-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

30.000

B

B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SKR001SS, DM-SKL001, AND DM-SKL001SS. "MIDMARK" WAS "WRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/29/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY DATE
PREPARED BY S.STRAIT | DATE 15-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2

PART NAME: TEMPLATE, WALL, DM-SKL001

PART NUMBER: 003-0966-00 | REV C

NAME: DLANGENKAMP OBJECT: 003-0966-00_1 DATE: 24-Jul-01 12:35:33

Go To Table Contents

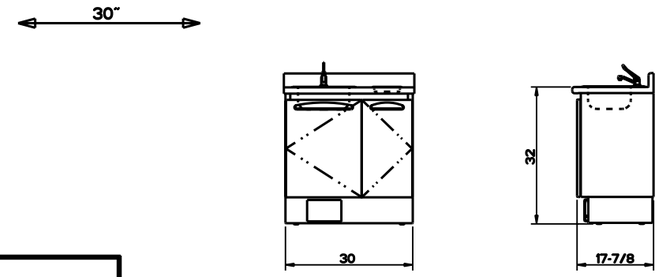

FRONT VIEW

END VIEW

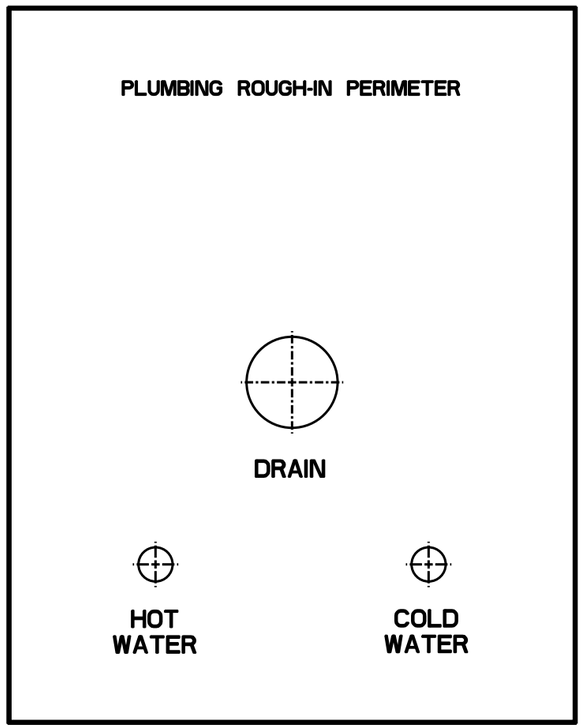

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

32"

WALL PLUMBING LAYOUT

DM-SKL001, DM-SKL001SS
DK-SKR001, DK-SKR001SS

Multi-Operatory Sink Casework
Left Hand Sink

003-0966-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0966-00_2 DATE:24-Jul-01 12:35:33

SCALE 0.500

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

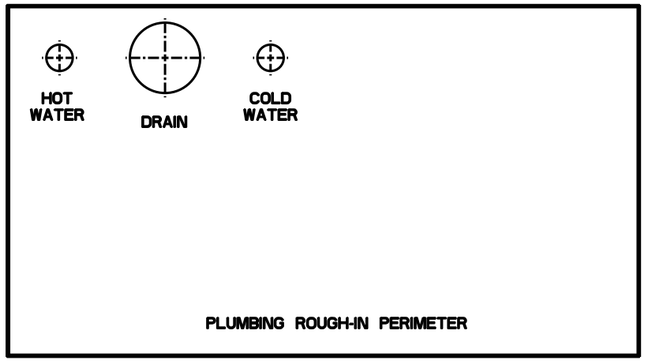

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

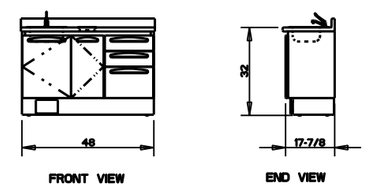

Model DM-ASL002 shown

FLOOR PLUMBING LAYOUT

DM-DRL001, DM-DRL001SS, DM-ASL001, DM-ASL001SS
DM-ASL002, DM-ASL002SS, DK-DRR001, DK-DRR001SS
DK-ASR001, DK-ASR001SS, DK-ASR002, DK-ASR002SS
Left Hand Sink

003-0972-00 Rev. B

48"

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

17.875

48.000

NAME: DLANGENKAMP OBJECT: 003-0972-00_1 DATE: 18-Jul-01 09:45:22

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS DK-DRR001SS, DK-ASR001SS, DK-ASR002SS, DM-DRL001, DM-DRL001SS, DM-ASL001, DM-ASL001SS, DM-ASL002, DM-ASL002SS, "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/29/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE: 0.500 | CK BY / DATE
PREPARED BY: S.STRAIT | DATE: 16-Sep-98
APPROVED BY / PROJECT ENGINEER | DATE

SHEET 1 OF 2

PART NAME: TEMPLATE, FLR, LH SINK CSWRK

PART NUMBER: 003-0972-00 | REV: B

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

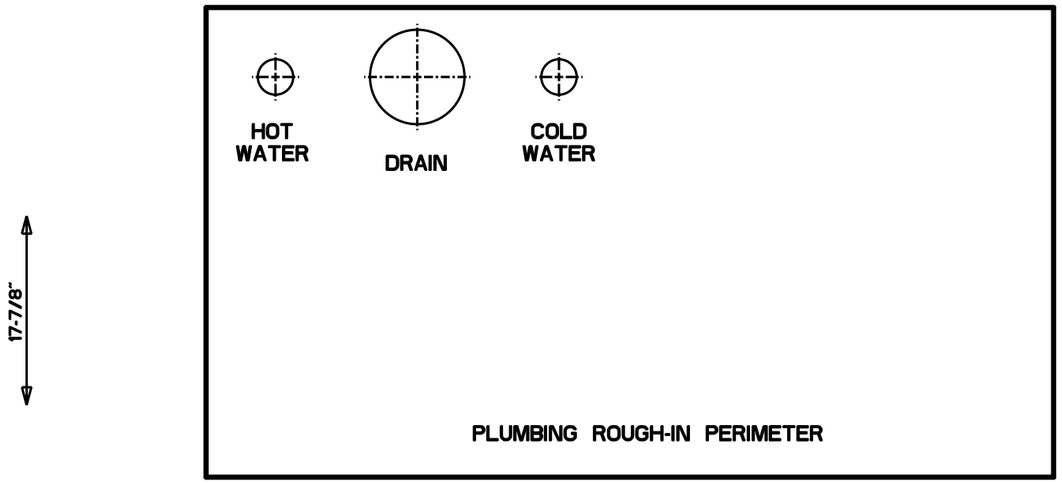

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe.
   Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs.
   Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

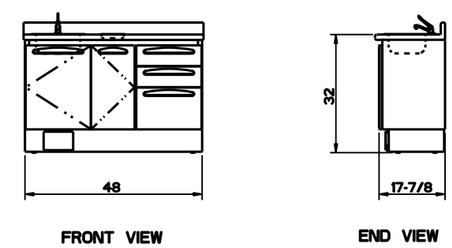

Model DM-ASL002 shown

FLOOR PLUMBING LAYOUT

DM-DRL001, DM-DRL001SS, DM-ASL001, DM-ASL001SS
DM-ASL002, DM-ASL002SS, DK-DRR001, DK-DRR001SS
DK-ASR001, DK-ASR001SS, DK-ASR002, DK-ASR002SS

Left Hand Sink

003-0972-00 Rev. B

48"

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0972-00_2 DATE:18-Jul-01 09:45:23
SCALE 0.500

Go To Table Contents

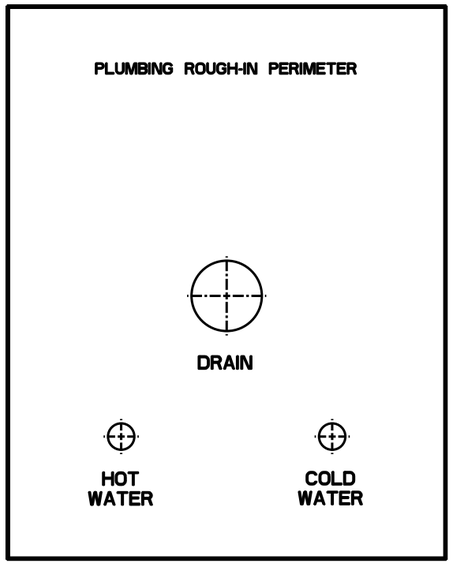

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

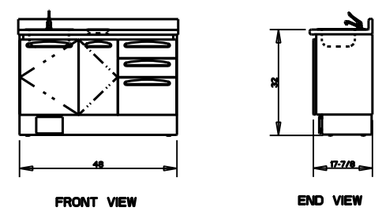

Model DM-ASL002 shown

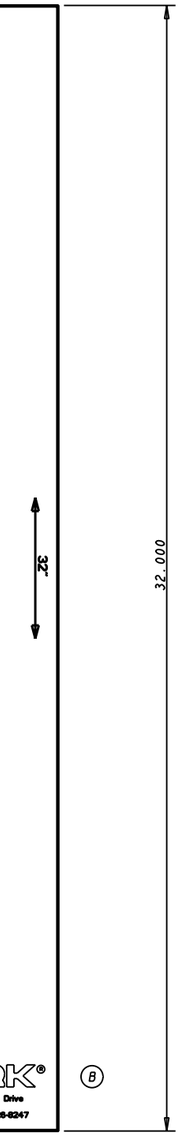

WALL PLUMBING LAYOUT

DM-DRL001, DM0DRL001SS, DM-ASL001, DM-ASL001SS
DM-ASL002, DM-ASL002SS, DK-DRR001, DK-DRR001SS
DK-ASR001, DK-ASR001SS, DK-ASR002, DK-ASR002SS
Left Hand Sink

003-0973-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

48.000

NAME: DLANGENKAMP OBJECT: 003-0973-00_1 DATE: 24-Jul-01 12:38:12

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ITEM	QTY	PART NUMBER	DESCRIPTION

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS, DK-DRR001SS, DK-ASR001SS, DK-ASR002SS, DM-DRL001, DM-DRL001SS, DM-ASL001, DM-ASL001SS, DM-ASL002, DM-ASL002SS. "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/29/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

MATERIAL SPEC: SEE NOTE
SCALE: 0.500
CK BY / DATE
PREPARED BY: S.STRAIT
DATE: 16-Sep-98
APPROVED BY PROJECT ENGINEER
DATE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SHEET 1 OF 2

PART NAME: TEMPLATE, WALL, LH SINK CSWRK
PART NUMBER: 003-0973-00
REV: C

48"

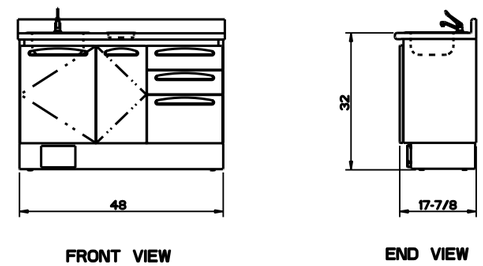

Model DM-ASL002 shown

32"

PLUMBING ROUGH-IN PERIMETER



DRAIN

HOT WATER

COLD WATER

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

WALL PLUMBING LAYOUT

DM-DRL001, DM0DRL001SS, DM-ASL001, DM-ASL001SS
DM-ASL002, DM-ASL002SS, DK-DRR001, DK-DRR001SS
DK-ASR001, DK-ASR001SS, DK-ASR002, DK-ASR002SS

Left Hand Sink

003-0973-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0973-00_2 DATE:24-Jul-01 12:38:13

Go To Table Contents

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 60 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

Model DM-RDR003 shown



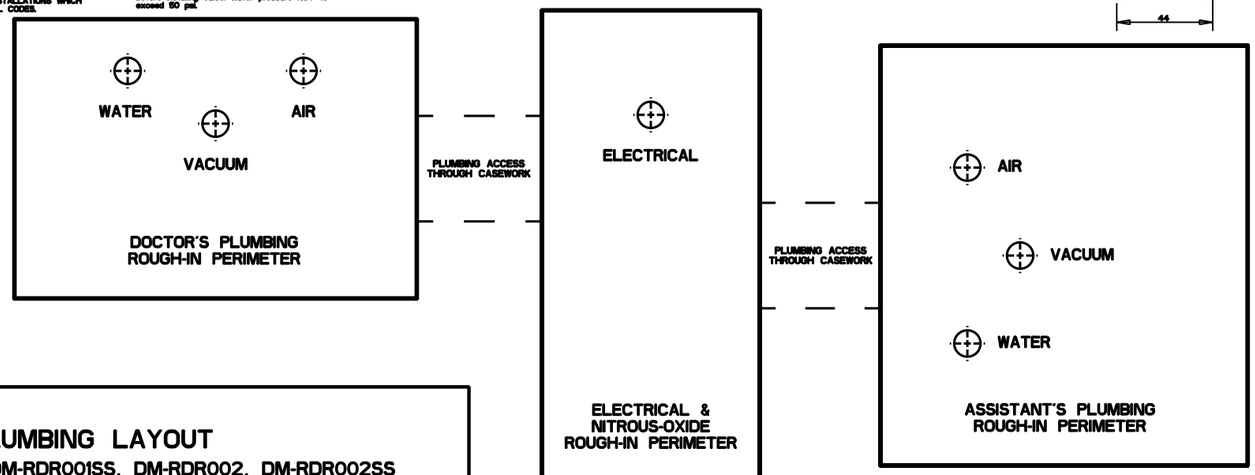

FLOOR PLUMBING LAYOUT

DM-RDR001, DM-RDR001SS, DM-RDR002, DM-RDR002SS
DM-RDR003, DM-RDR003SS, DK-RDR001, DK-RDR001SS
DK-RDR002, DK-RDR002SS, DK-RDR003, DK-RDR003SS

12 O'Clock Delivery Casework
Right Hand Delivery

003-0974-00 Rev. B

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

19.875

44.000

NAME: DLANGENKAMP OBJECT: 003-0974-00_I DATE: 24-Jul-01 10:01:26

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS DK-RDR001SS, DK-RDR002SS, DK-RDR003SS, DM-RDR001, DM-RDR001SS, DM-RDR002, DM-RDR002SS, DM-RDR003, DM-RDR003SS. "MIDMARK" WAS "WRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/29/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE
PREPARED BY S.STRAIT | DATE 16-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2
PART NAME: TEMPLATE, FLOOR, DM-RDR00X
PART NUMBER: 003-0974-00 | REV B

Go To Table Contents

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

Model DM-RDR003 shown

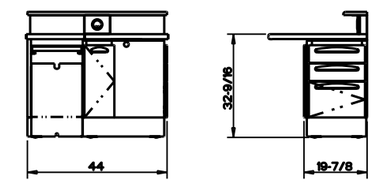

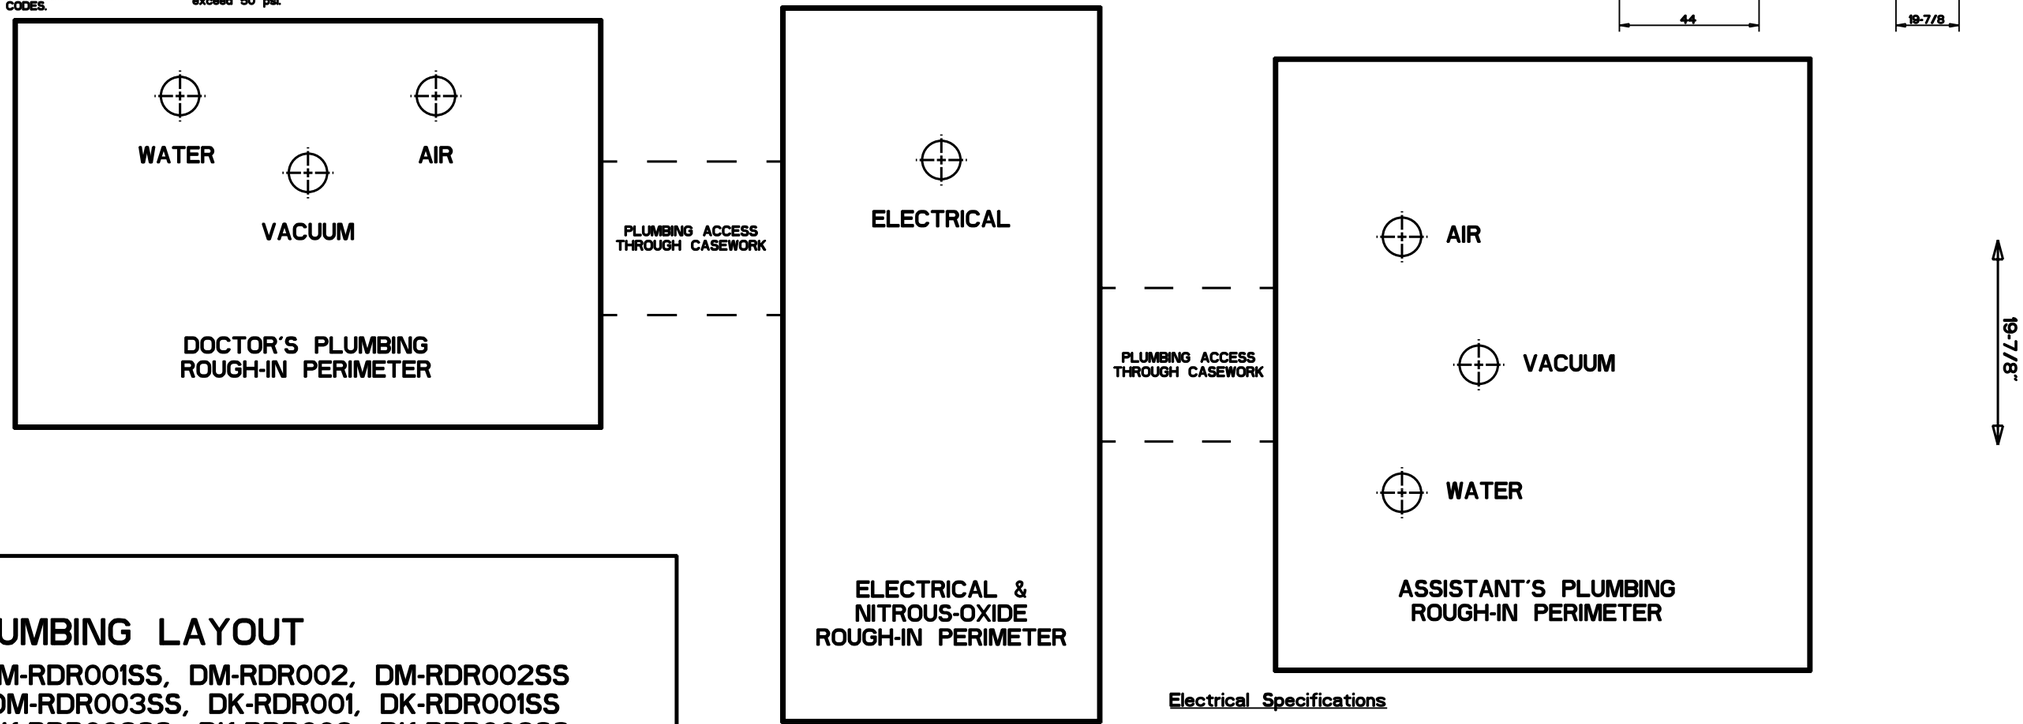

FLOOR PLUMBING LAYOUT

DM-RDR001, DM-RDR001SS, DM-RDR002, DM-RDR002SS
DM-RDR003, DM-RDR003SS, DK-RDR001, DK-RDR001SS
DK-RDR002, DK-RDR002SS, DK-RDR003, DK-RDR003SS
12 O'Clock Delivery Casework
Right Hand Delivery

003-0974-00 Rev. B

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0974-00_2 DATE:24-Jul-01 10:01:27

Go To Table Contents

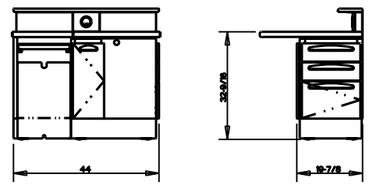

Model DM-RDR003 shown

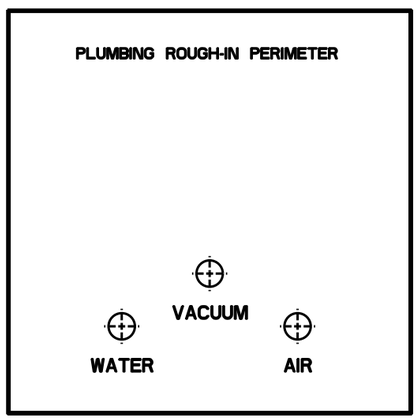

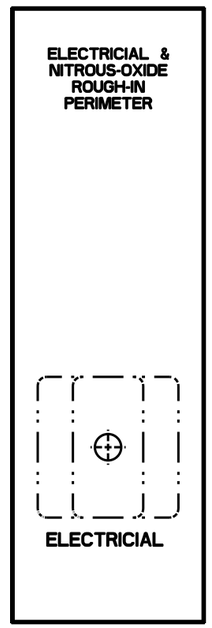

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stub for water, air, and vacuum can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. WATER: 3/4" diameter hole required for a 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. KNIGHT CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

WALL PLUMBING LAYOUT

DM-RDR001, DM-RDR001SS, DM-RDR002, DM-RDR002SS
DM-RDR003, DM-RDR003SS, DK-RDR001, DK-RDR001SS
DK-RDR002, DK-RDR002SS, DK-RDR003, DK-RDR003SS
12 O'Clock Delivery Casework
Right Hand Delivery
003-0975-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

44.000

32.562

32-9/16"

NAME: DLANGENKAMP OBJECT: 003-0975-00_1 DATE: 24-Jul-01 12:40:15

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS DK-RDR001SS, DK-RDR002SS, DK-RDR003SS, DM-RDR001, DM-RDR001SS, DM-RDR002, DM-RDR002SS, DM-RDR003, DM-RDR003SS. "MIDMARK" WAS "KNIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/29/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY DATE
PREPARED BY S.STRAIT | DATE 16-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2
PART NAME: TEMPLATE, WALL, DM-RDR00x
PART NUMBER: 003-0975-00 | REV C

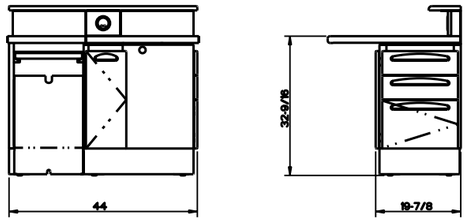

Model DM-RDR003 shown

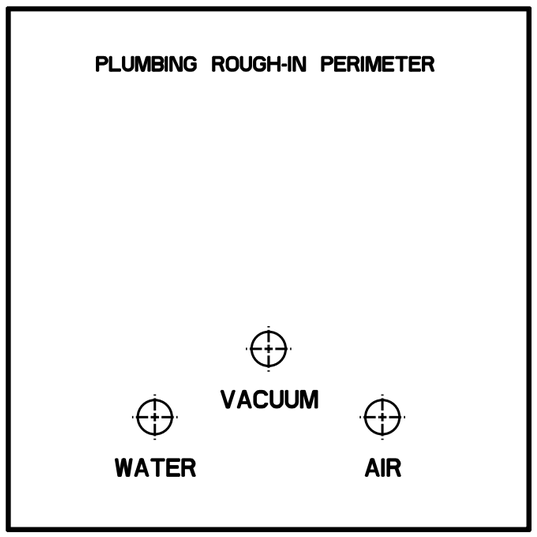

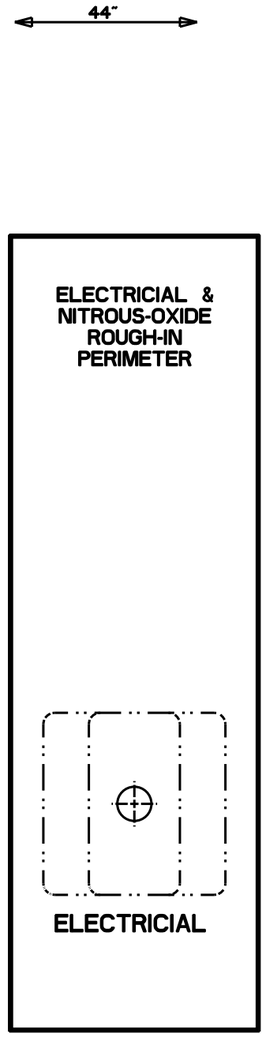

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stub for water, air, and vacuum can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. WATER: 3/4" diameter hole required for a 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. KNIGHT CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

WALL PLUMBING LAYOUT

DM-RDR001, DM-RDR001SS, DM-RDR002, DM-RDR002SS
DM-RDR003, DM-RDR003SS, DK-RDR001, DK-RDR001SS
DK-RDR002, DK-RDR002SS, DK-RDR003, DK-RDR003SS

12 O'Clock Delivery Casework
Right Hand Delivery

003-0975-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0975-00_2 DATE:24-Jul-01 12:40:16

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

Model DM-RTR003 shown

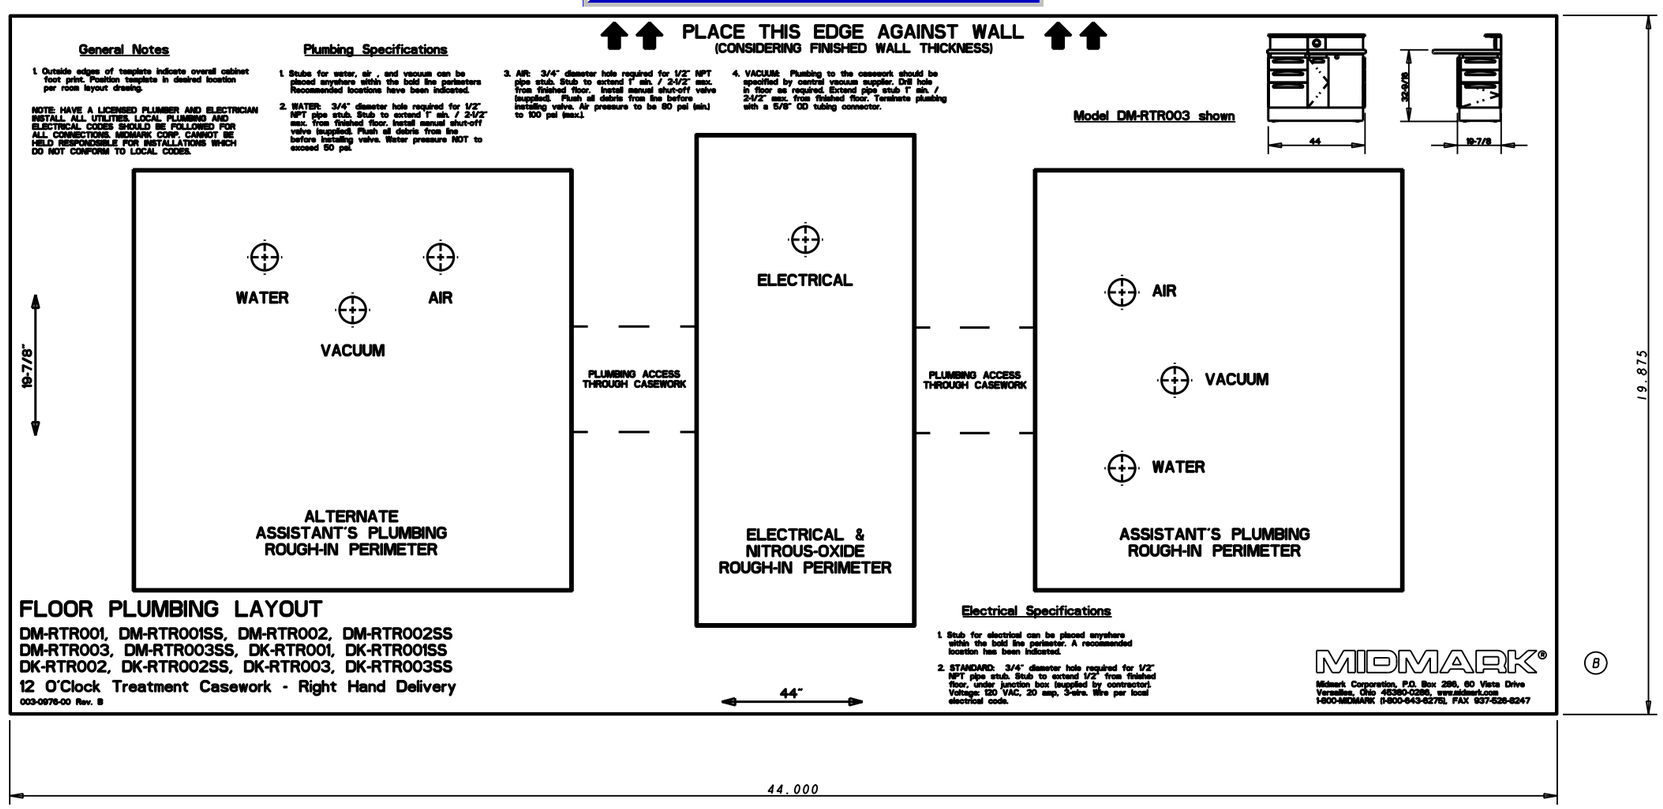

FLOOR PLUMBING LAYOUT

DM-RTR001, DM-RTR001SS, DM-RTR002, DM-RTR002SS
DM-RTR003, DM-RTR003SS, DK-RTR001, DK-RTR001SS
DK-RTR002, DK-RTR002SS, DK-RTR003, DK-RTR003SS
12 O'Clock Treatment Casework - Right Hand Delivery

003-0976-00 Rev. B

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-RTR001SS, DK-RTR002SS, DK-RTR003SS, DM-RTR001, DM-RTR001SS, DM-RTR002, DM-RTR002SS, DM-RTR003, DM-RTR003SS, "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE
PREPARED BY S.STRAIT | DATE 16-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2

PART NAME: TEMPLATE, FLOOR, DM-RTR00x
PART NUMBER: 003-0976-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0976-00_1 DATE: 24-Jul-01 10:12:04

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

Model DM-RTR003 shown

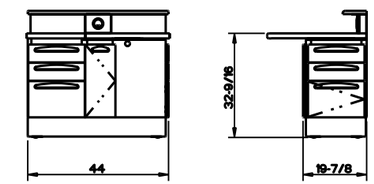

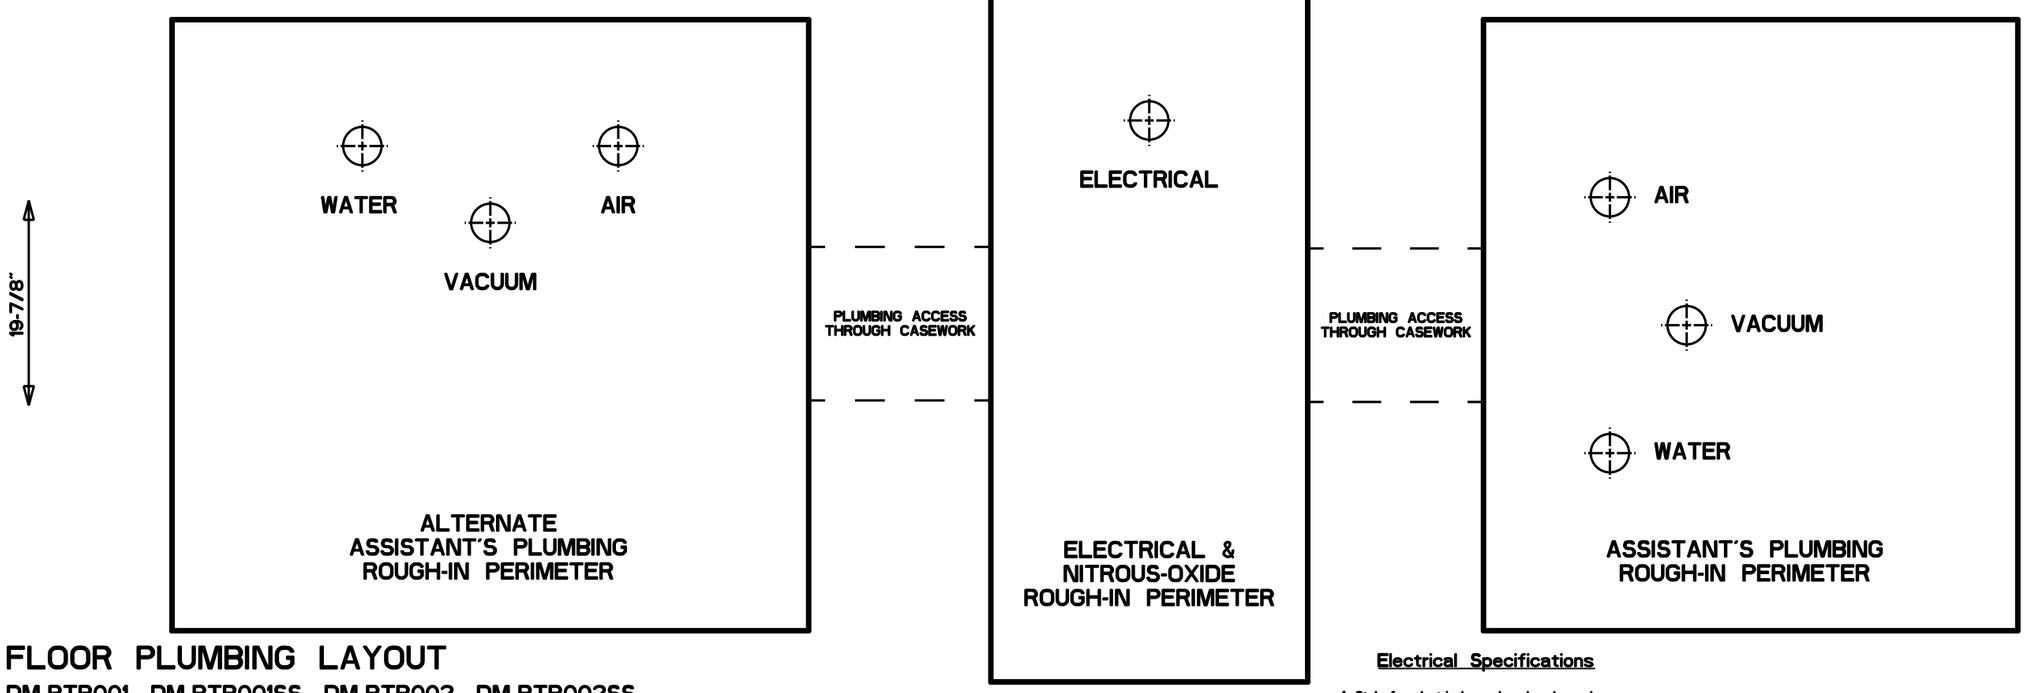

FLOOR PLUMBING LAYOUT

DM-RTR001, DM-RTR001SS, DM-RTR002, DM-RTR002SS
DM-RTR003, DM-RTR003SS, DK-RTR001, DK-RTR001SS
DK-RTR002, DK-RTR002SS, DK-RTR003, DK-RTR003SS
12 O'Clock Treatment Casework - Right Hand Delivery
003-0976-00 Rev. B

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: 003-0976-00_2 DATE: 24-Jul-01 10:12:05

Go To Table Contents

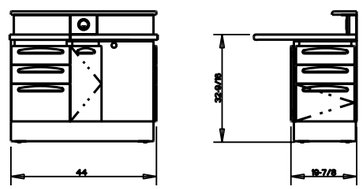

Model DM-RTR003 shown

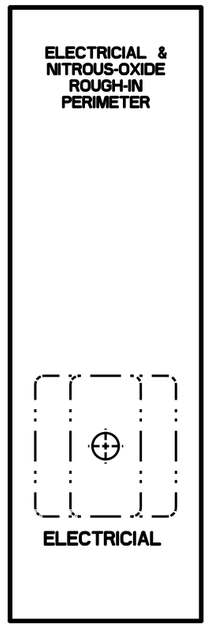

General Notes

1. Outside edges of template indicate overall cabinet silhouette including countertop. Position template on wall in desired location per room layout drawing

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

32-9/16"

32.562

44"

WALL PLUMBING LAYOUT

DM-RTR001, DM-RTR001SS, DM-RTR002, DM-RTR002SS
DM-RTR003, DM-RTR003SS, DK-RTR001, DK-RTR001SS
DK-RTR002, DK-RTR002SS, DK-RTR003, DK-RTR003SS

12 O'Clock Treatment Casework
Right Hand Delivery

003-0977-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

44.000

NAME: DLANGENKAMP OBJECT: 003-0977-00_1 DATE: 24-Jul-01 12:44:20

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-RTR001SS, DK-RTR002SS, DK-RTR003SS, DM-RTR001, DM-RTR001SS, DM-RTR002, DM-RTR002SS, DM-RTR003, DM-RTR003SS, "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY DATE | SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 16-Sep-98 | PART NAME TEMPLATE, WALL, DM-RTR00x

APPROVED BY PROJECT ENGINEER | DATE | PART NUMBER 003-0977-00 | REV C

44"

Go To Table Contents

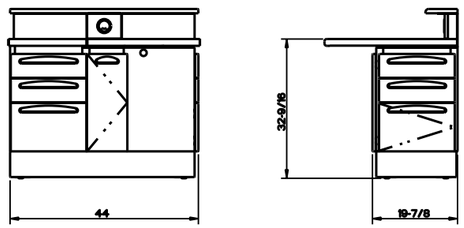

Model DM-RTR003 shown

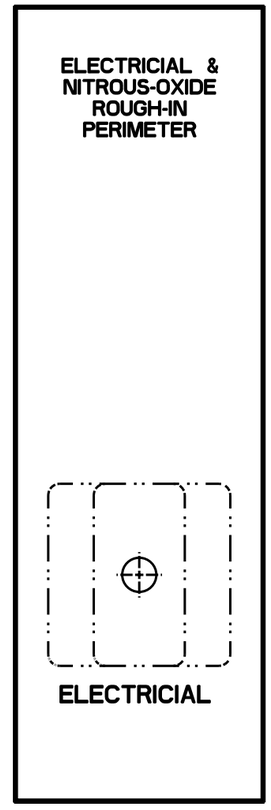

32-9/16"

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

WALL PLUMBING LAYOUT

DM-RTR001, DM-RTR001SS, DM-RTR002, DM-RTR002SS
DM-RTR003, DM-RTR003SS, DK-RTR001, DK-RTR001SS
DK-RTR002, DK-RTR002SS, DK-RTR003, DK-RTR003SS

12 O'Clock Treatment Casework
Right Hand Delivery

003-0977-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

Go To Table Contents

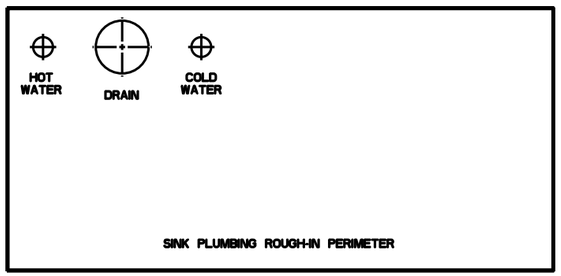

FLOOR PLUMBING LAYOUT

DM-SDL001, DM-SDL001SS
DK-SDR001, DK-SDR001SS
Short Arm Side Delivery Casework
Left Hand Sink

003-0978-00 Rev. B

30"

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1-1/2" drain pipe.
   Drainage tube per local plumbing codes. Recommended that sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter hole required for 1/2" NPT size stub. Hole to extend 2" on / 3-1/2" size. Use flexible line hand wand shutoff valve supplied. Flush of debris from line before installing valve. Water pressure 50PSI to maximum 80 psi.

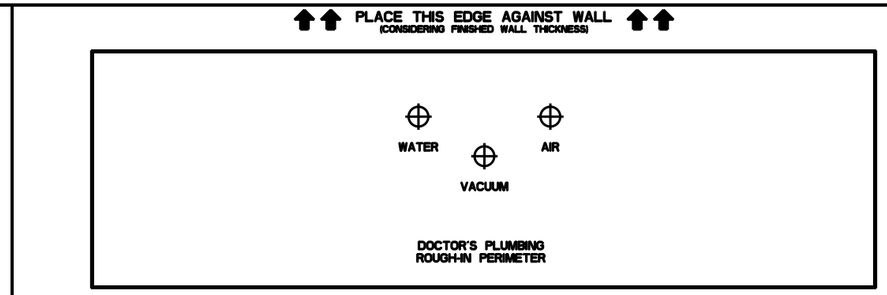

35-3/4"

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT size stub. Hole to extend 2" on / 3-1/2" size. Use flexible line hand wand shutoff valve supplied. Flush of debris from line before installing valve. Water pressure 50PSI to maximum 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT size stub. Hole to extend 2" on / 3-1/2" size. Use flexible line hand wand shutoff valve supplied. Flush of debris from line before installing valve. Air pressure to be 80 psi (max) to 100 psi (max).
3. VACUUM: Plumbing to the vacuum should be supplied by a single source regulator. Do not have to have an regulator. Hand valve stub 2" on / 3-1/2" size. Use flexible line. Vacuum plumbing will a 3/4" OD tubing minimum.

General Notes

NOTE: HIRE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES MAYBE DIFFERENT FROM PLUMBING CODES MADE BY DOLL CORP. FOR SINK, DOCTOR'S AND DENTAL CASEWORK. WE HOLD RESPONSIBLE FOR INSTALLATIONS THAT DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinet face plate. Position template in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum are to be placed anywhere within the 3x12 line provided. Recommended locations have been indicated.

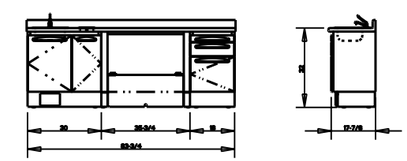

FRONT VIEW

END VIEW

17.875

18"

MIDMARK®

83.750

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDR001SS, DM-SDL001, AND DM-SDL001SS. "MIDMARK" WAS "WRIGHT" by MIDMARK, REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION. ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES

ANGULAR +/-	.
FRACTIONAL +/-	.
DECIMAL.XX +/-	.06
DECIMAL.XXX +/-	.031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 16-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, FLOOR, DM-SDL001

PART NUMBER: 003-0978-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0978-00_1 DATE: 24-Jul-01 10:19:25

Go To Table Contents

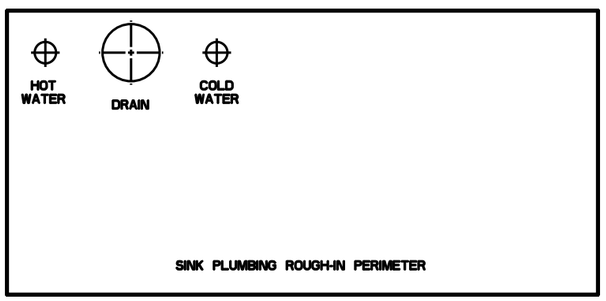

FLOOR PLUMBING LAYOUT

DM-SDL001, DM-SDL001SS
DK-SDR001, DK-SDR001SS
Short Arm Side Delivery Casework
Left Hand Sink

DM-078-00 Rev. B

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1-1/2" drain pipe.
   Install P-trap trap per local plumbing codes. Extension tube installed from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 3/8" NPT pipe nipple. Pipe nipple, flush to extend 1" min. / 3-1/2" max. from finished floor. Install second shut-off valve (supplied). Shut-off valves supplied by contractor. Shut-off valves require 3/8" ID orifice for installation of faucet controller.

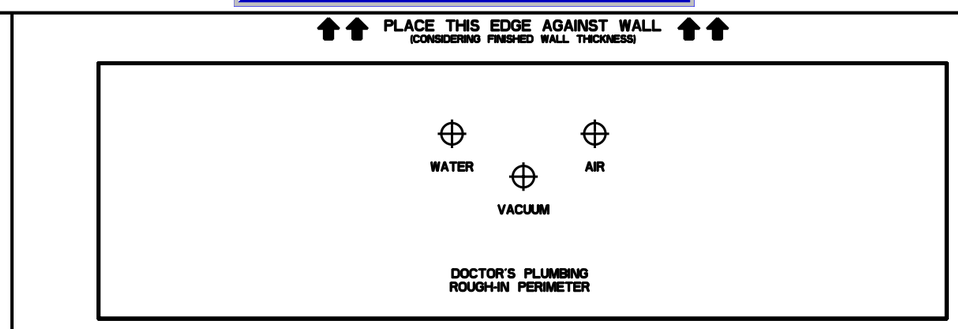

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 3/8" NPT pipe nipple. Pipe nipple, flush to extend 1" min. / 3-1/2" max. from finished floor. Install second shut-off valve (supplied). Shut-off valves supplied by contractor. Shut-off valves require 3/8" ID orifice for installation of faucet controller.
2. AIR: 3/4" diameter hole required for 3/8" NPT pipe nipple. Pipe nipple, flush to extend 1" min. / 3-1/2" max. from finished floor. Install second shut-off valve (supplied). Shut-off valves supplied by contractor. Shut-off valves require 3/8" ID orifice for installation of faucet controller.
3. VACUUM: Plumbing to the cassework should be operated by central vacuum supplier. Stub hole is floor as required. Ground pipe stub 1" min. / 3-1/2" max. from finished floor. Terminate plumbing with a 3/8" OD tubing connector.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets front plan. Position template in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the field the gasketed. Recommended locations have been indicated.



FRONT VIEW



END VIEW

MIDMARK®
Midmark Corporation, P.O. Box 392, 60 Vista Drive
Versailles, Ohio 45380-0392, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-3047

SCALE 0.375

NAME:DLANGENKAMP OBJECT:003-09/08-22 DATE:24-JUL-01 10:19:26

Go To Table Contents

30"

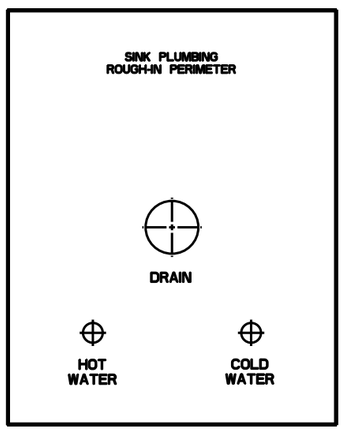

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1½" O.D. drain. Drain must be level with sink bottom. Extension tube included. Hole sink is 1½" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT (3/8" O.D.) supply lines. Lines must be at least 1 3/4" from the sink edge. Install angle stops. Shut-off valves supplied by customer. Shut-off valves require 3/8" ID. outlet for installation of faucet connector.

35-3/4"

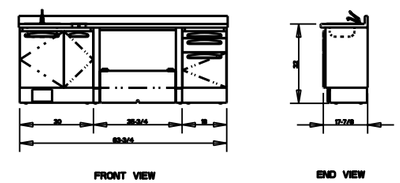

FRONT VIEW

END VIEW

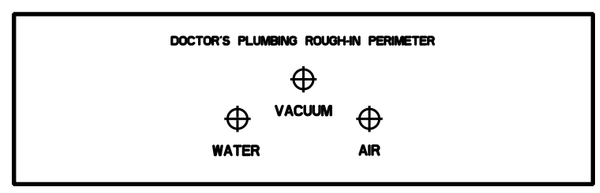

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 2" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure not to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 2" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 120 psi (max).
3. VACUUM: Plumbing to the vacuum should be specified by special vacuum supplier. Drill hole in wall as required. Extend pipe stub 2" min. / 3-1/2" max. from finished wall surface. Terminate plumbing with a 3/8" OD tubing connector.

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

18"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertops). Position template on wall in desired location per room layout drawing.
2. Holes for drain, hot water, cold water, air, and vacuum can be placed anywhere within the area the particular Recommended location have been indicated.

MIDMARK®
Midmark Corporation, P.O. Box 392, 60 Vista Drive
Versailles, Ohio 45380-0392 USA
1-800-510-8020 2-800-643-8616, FAX 937-526-8947

32.000

25

(B)

83.750

(B)

WALL PLUMBING LAYOUT

DM-SDL001, DM-SDL001SS
DK-SDR001, DK-SDR001SS
Short Arm Side Delivery Casework
Left Hand Sink

003-0979-00 Rev. B

(B)

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDR001SS, DM-SDL001, AND DM-SDL001SS. "MIDMARK" WAS "WRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 16-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, WALL, DM-SDL001

PART NUMBER: 003-0979-00 | REV: C

NAME: DLANGENKAMP OBJECT: 003-0979-00_1 DATE: 24-Jul-01 12:50:00

Go To Table Contents

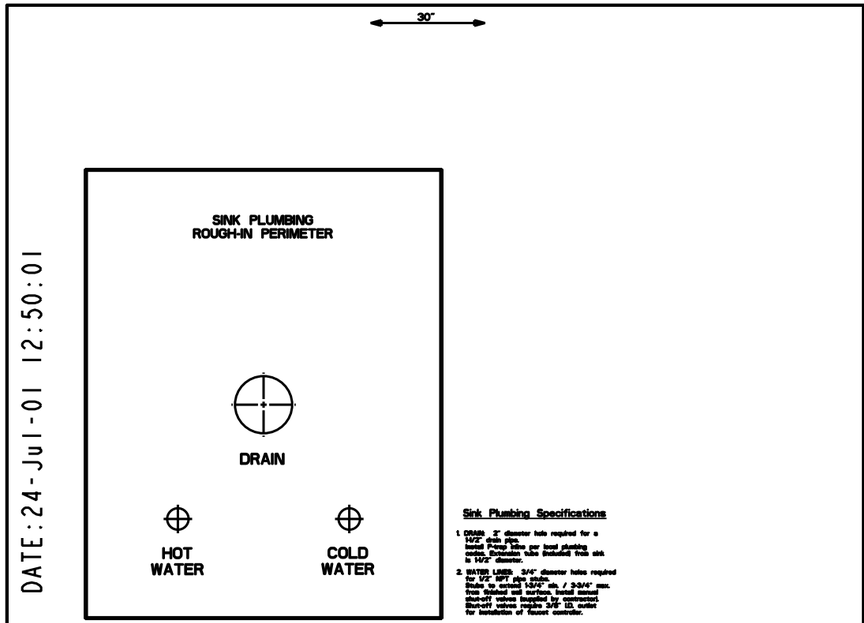

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap tube per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

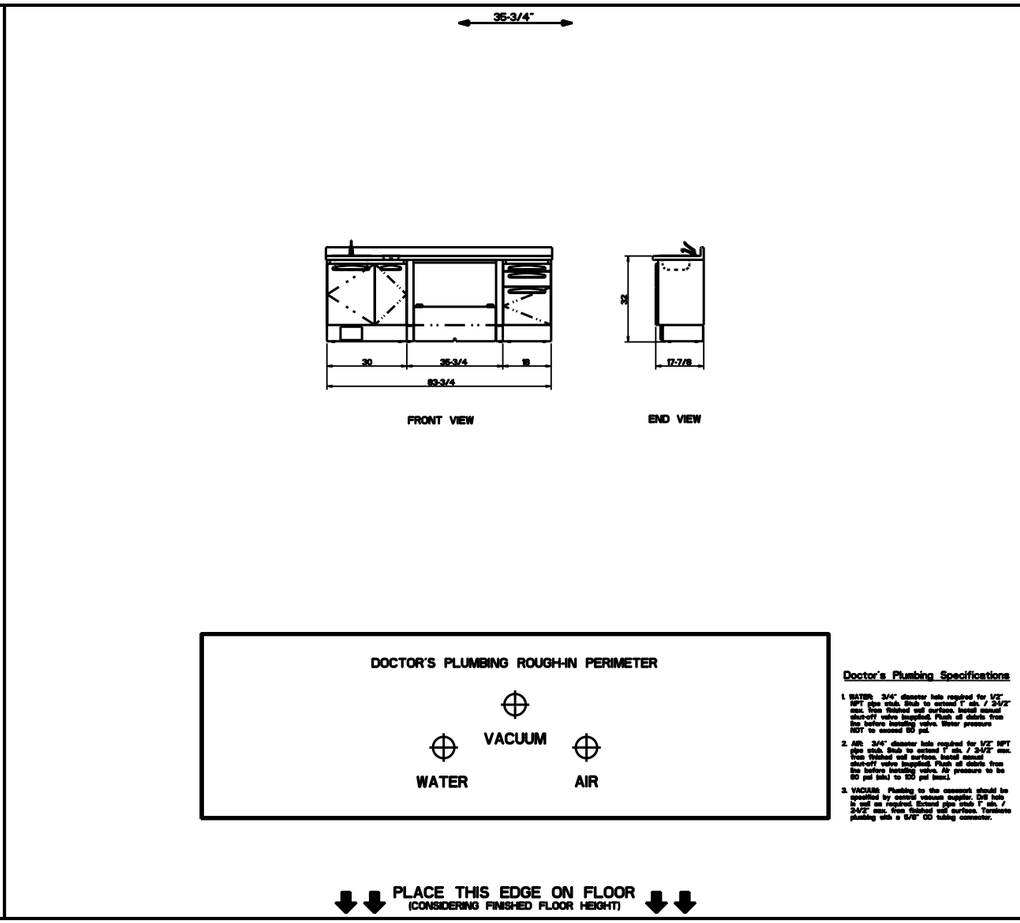

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole is wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

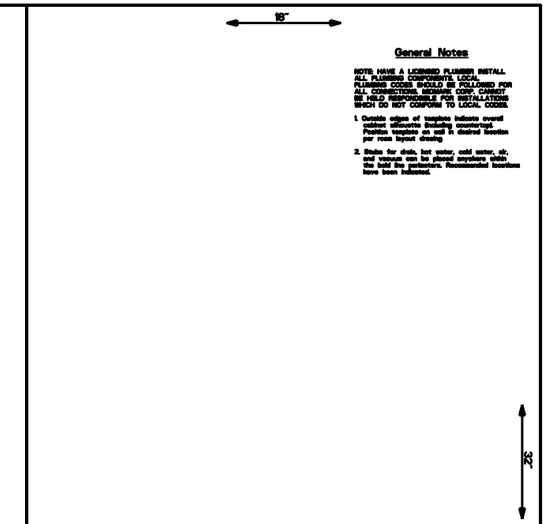

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

WALL PLUMBING LAYOUT
DM-SDL001, DM-SDL001SS
DK-SDR001, DK-SDR001SS
Short Arm Side Delivery Casework
Left Hand Sink
003-0979-00 Rev. B

NAME:DLANGENKAMP OB 003-0979-00_2 DATE:24-Jul-01 12:50:01

Go To Table Contents

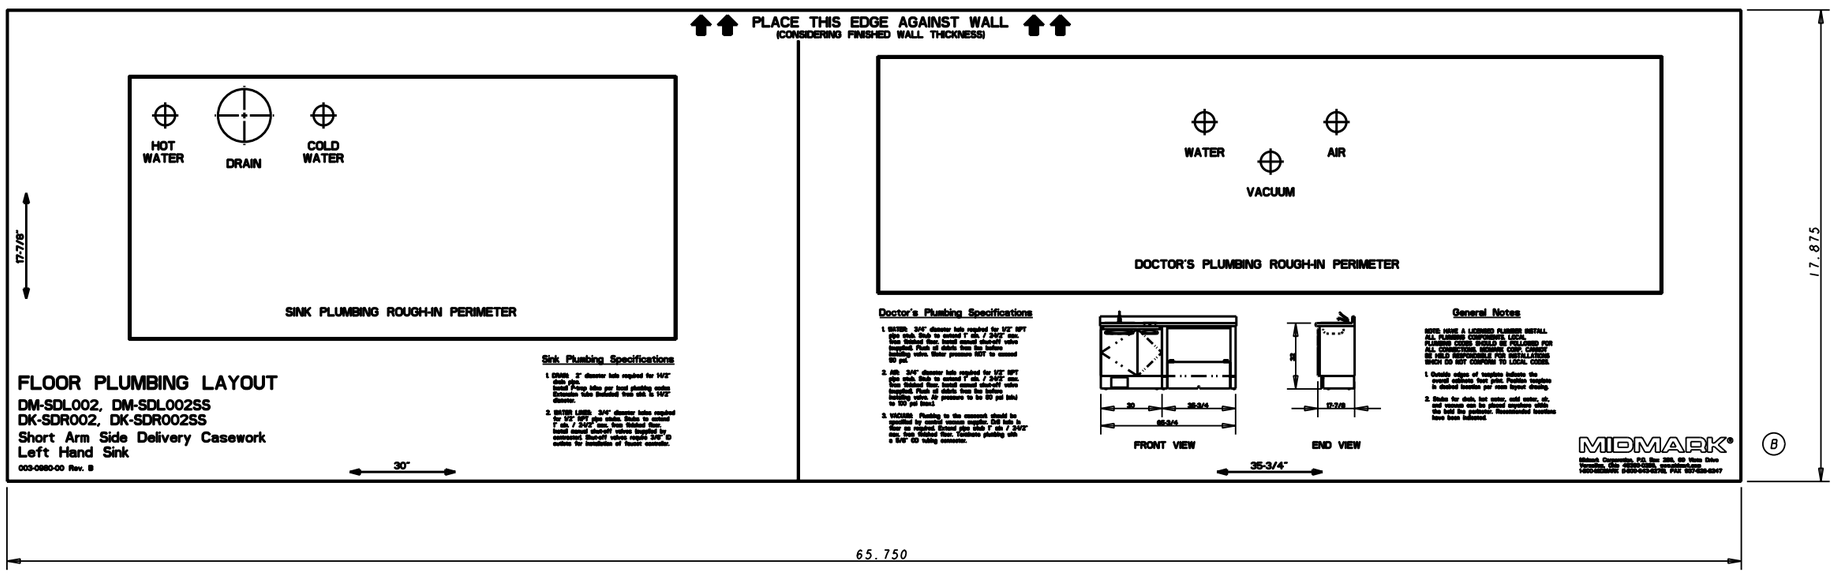

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDR002SS, DM-SDL002, AND DM-SDL002SS. "MIDMARK" WAS "BRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY | DATE
SHEET 1 OF 2
PREPARED BY S.STRAIT | DATE 17-Sep-98
PART NAME TEMPLATE, FLOOR, DM-SDL002
APPROVED BY PROJECT ENGINEER | DATE
PART NUMBER 003-0980-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0980-00_1 DATE: 24-Jul-01 10:22:21

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

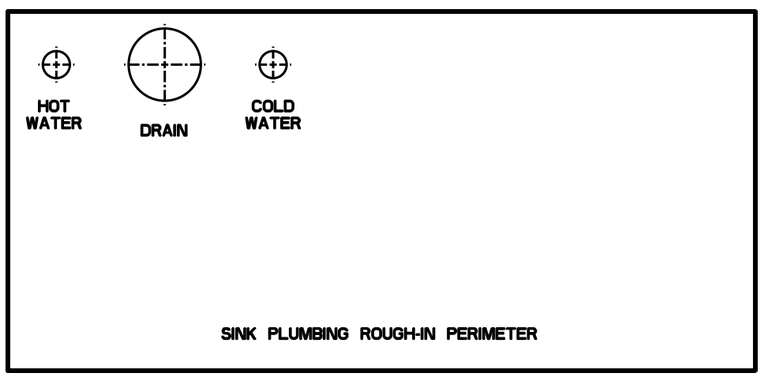

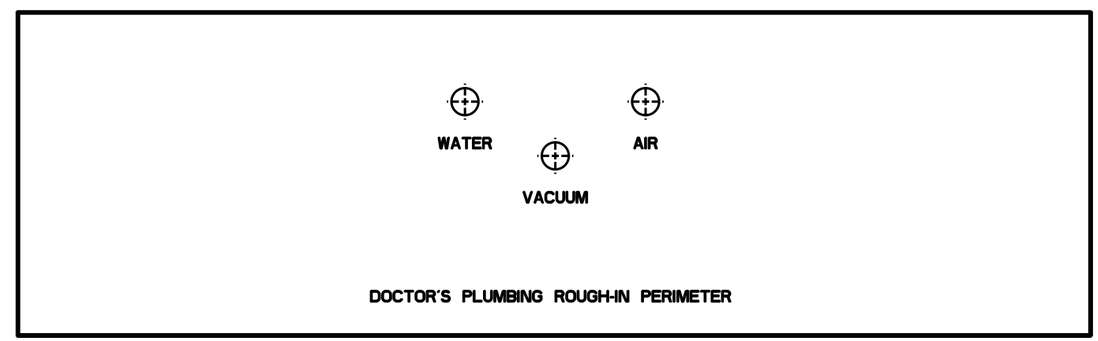

FLOOR PLUMBING LAYOUT

DM-SDL002, DM-SDL002SS
DK-SDR002, DK-SDR002SS
Short Arm Side Delivery Casework
Left Hand Sink

003-0980-00 Rev. B

30"

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" ID outlets for installation of faucet controller.

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 60 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

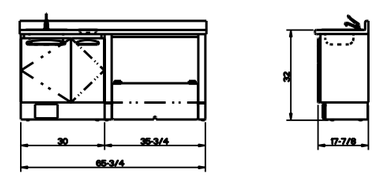

FRONT VIEW

END VIEW

35-3/4"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

DATE: 24-JUL-04 10:22:22
OBJECT: 003-0980-00
NAME: DLANGENKAMP
SCALE 0

Go To Table Contents

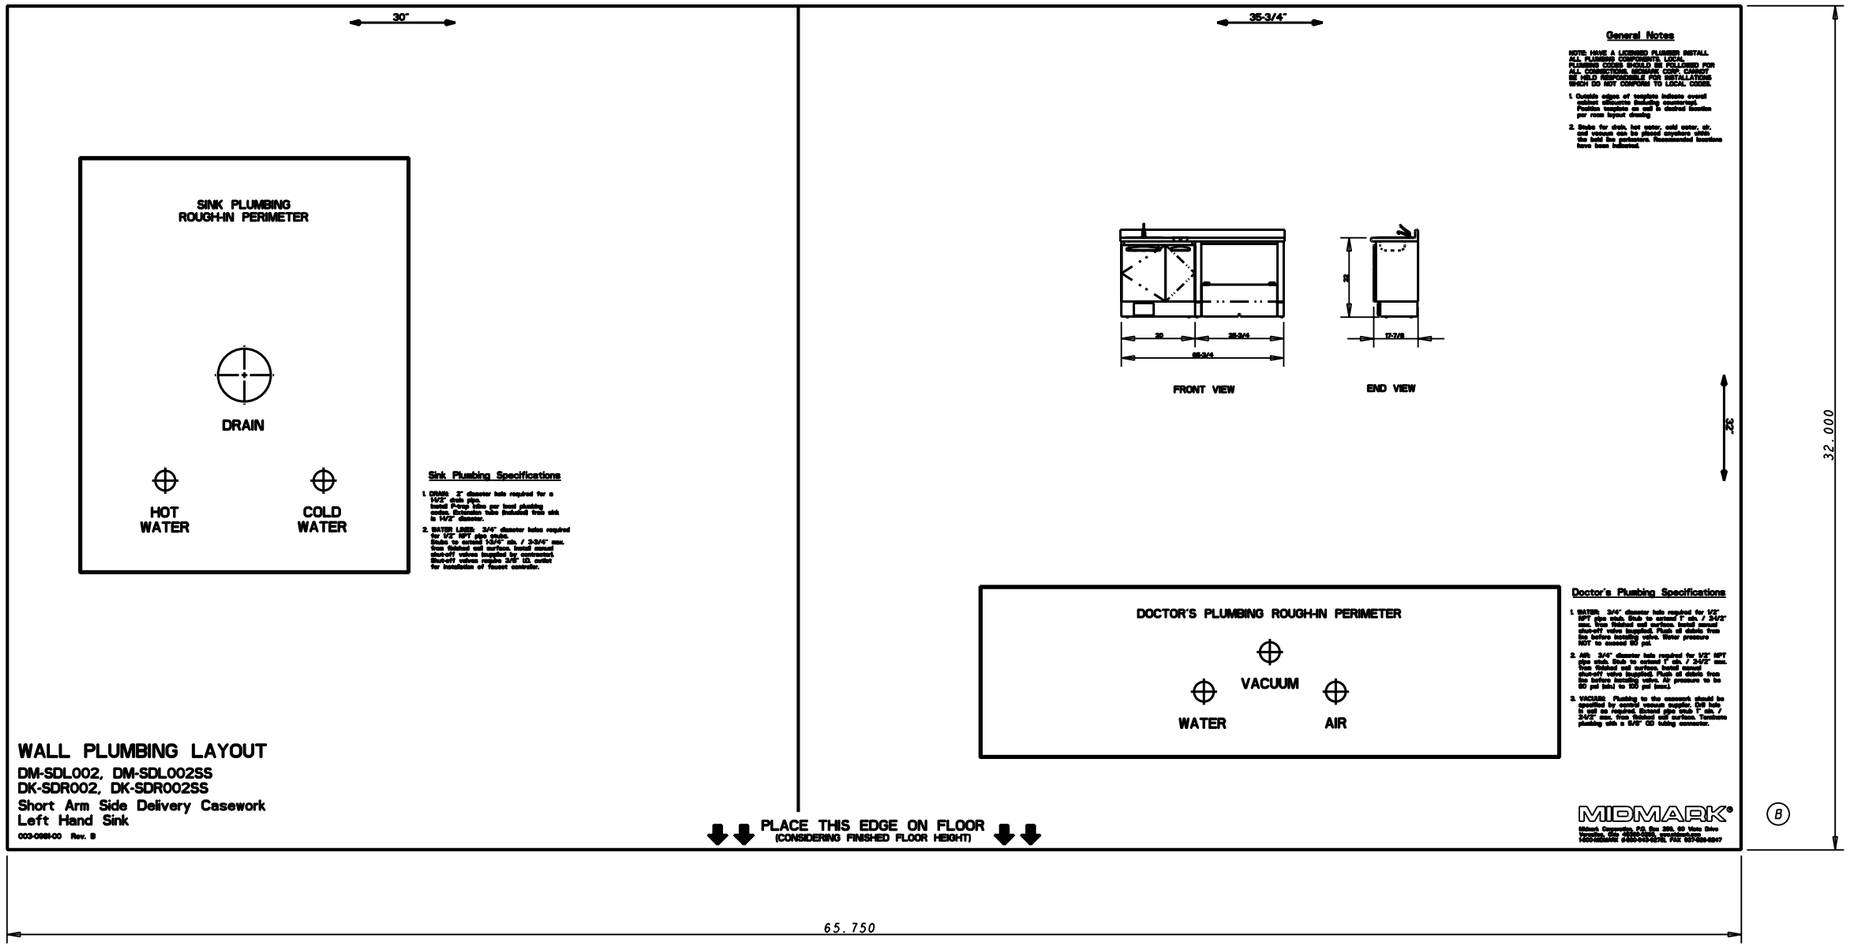

NAME: DLANGENKAMP OBJECT: 003-0981-00_I DATE: 24-Jul-01 12:51:59

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDR002SS, DM-SDL002, AND DM-SDL002SS. "MIDMARK" WAS "MIDRIGHT" by MIDMARK. REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION. ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES

ANGULAR +/-	.
FRACTIONAL +/-	.
DECIMAL.XX +/-	.06
DECIMAL.XXX +/-	.031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY DATE

PREPARED BY S.STRAIT | DATE 17-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2

PART NAME: TEMPLATE, WALL, DM-SDL002

PART NUMBER: 003-0981-00 | REV C

Go To Table Contents

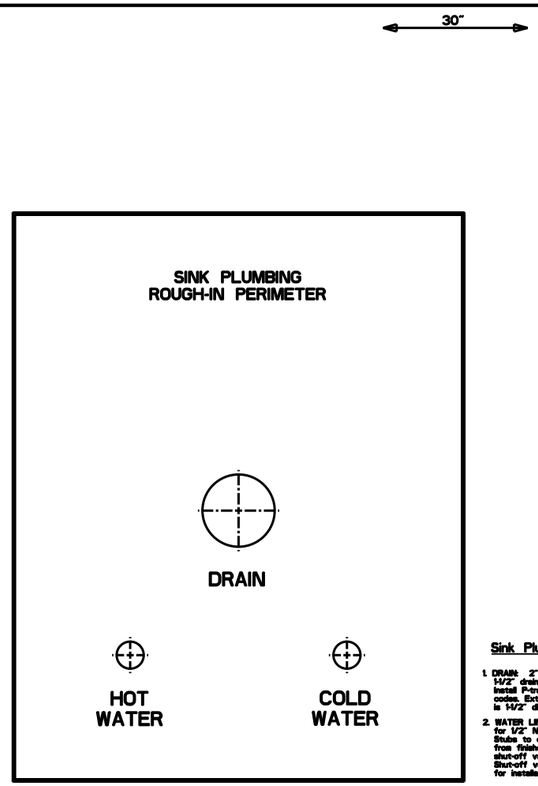

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe.
   Install P-trap tube per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs.
   Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

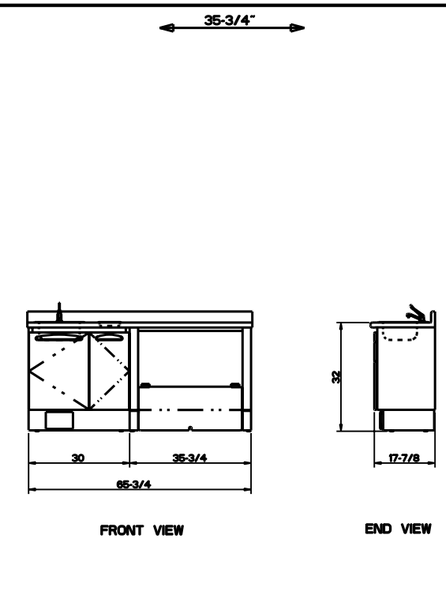

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

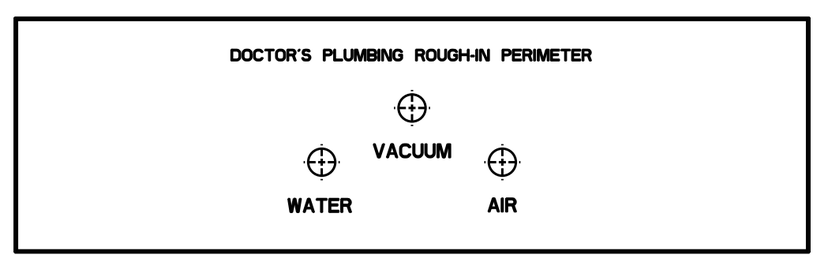

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

WALL PLUMBING LAYOUT

DM-SDL002, DM-SDL002SS
DK-SDR002, DK-SDR002SS
Short Arm Side Delivery Casework
Left Hand Sink

003-0981-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP DATE:24-Jul-01 12:52:00 PROJECT:003-0981-00_2

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

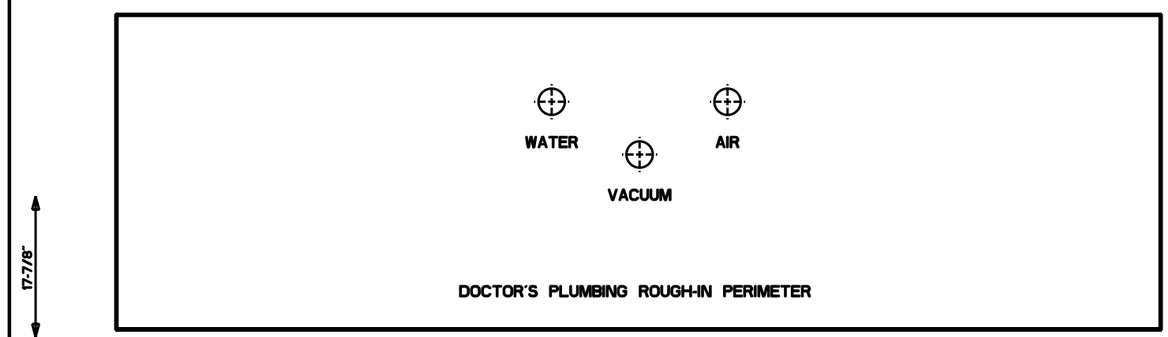

FLOOR PLUMBING LAYOUT

DM-SDL003, DM-SDL003SS
DK-SDR003, DK-SDR003SS
Short Arm Side Delivery Casework
Right Hand Storage

003-0982-00 Rev. B

35-3/4"

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

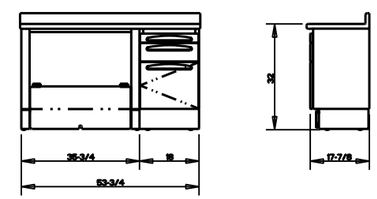

FRONT VIEW

END VIEW

18"

17.875

53.750

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DM-SDR003SS, DM-SDL003, AND DM-SDL003SS. "MIDMARK" WAS "KNIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 17-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, FLOOR, DM-SDL003

PART NUMBER: 003-0982-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0982-00_1 DATE: 24-Jul-01 10:26:31

Go To Table Contents

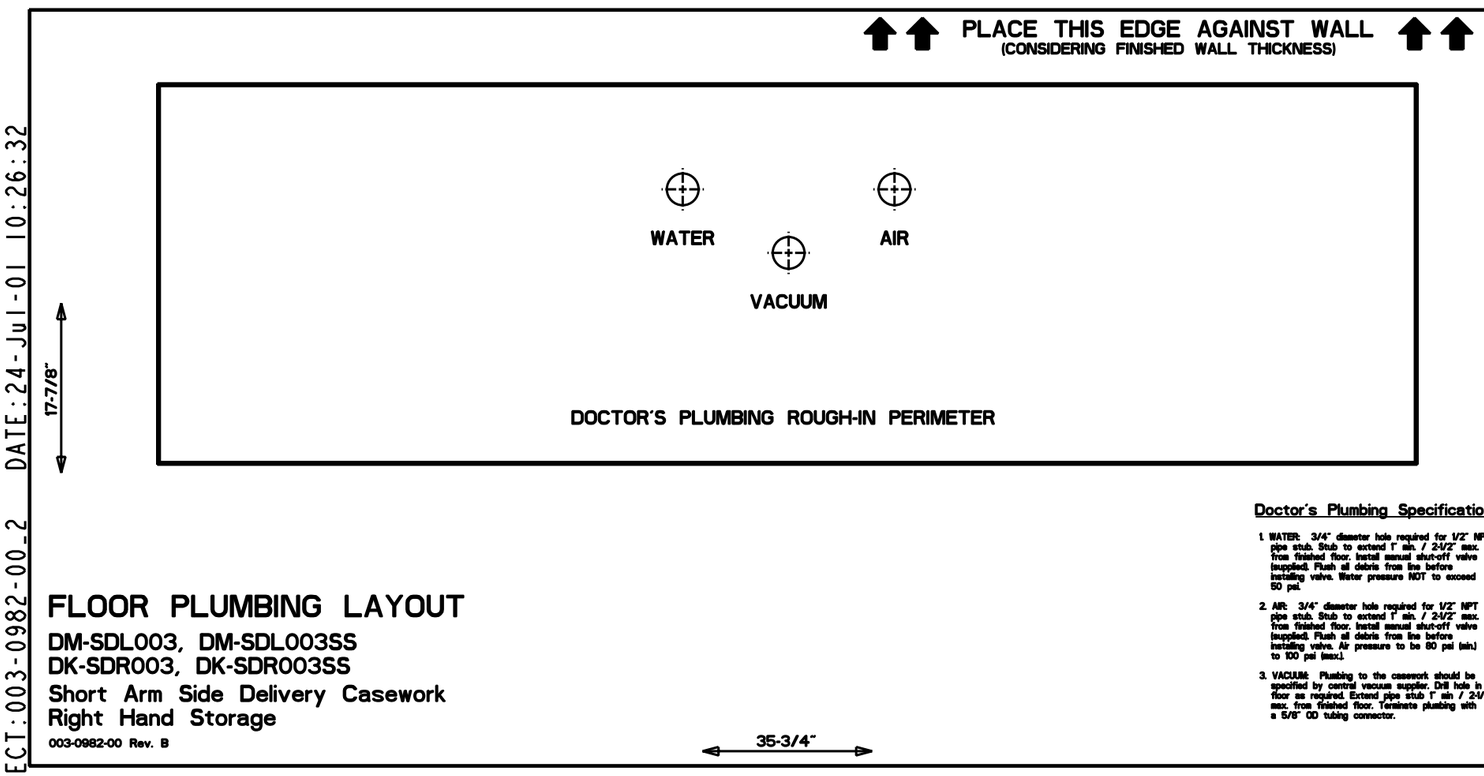

FLOOR PLUMBING LAYOUT

DM-SDL003, DM-SDL003SS
DK-SDR003, DK-SDR003SS
Short Arm Side Delivery Casework
Right Hand Storage

003-0982-00 Rev. B

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.



FRONT VIEW



END VIEW

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

OBJECT:003-0982-00_2 DATE:24-Jul-01 10:26:32

NAME:DLANGENKAMP

SCALE 0.500

Go To Table Contents

35-3/4"



FRONT VIEW

END VIEW

DOCTOR'S PLUMBING ROUGH-IN PERIMETER

VACUUM

WATER

AIR

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

WALL PLUMBING LAYOUT

DM-SDL003, DM-SDL003SS
DK-SDR003, DK-SDR003SS
Short Arm Side Delivery Casework
Right Hand Storage
003-0983-00 Rev. B

(B)

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

18"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

32"

32.000

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

(B)

53.750

(B)

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDR003SS, DM-SDL003, AND DM-SDL003SS. "MIDMARK" WAS "BRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 17-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, WALL, DM-SDL003

PART NUMBER: 003-0983-00 | REV C

NAME: DLANGENKAMP OBJECT: 003-0983-00_1 DATE: 24-Jul-01 12:54:45

Go To Table Contents

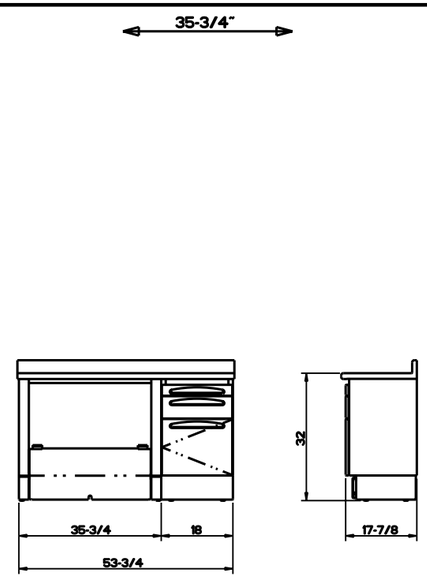

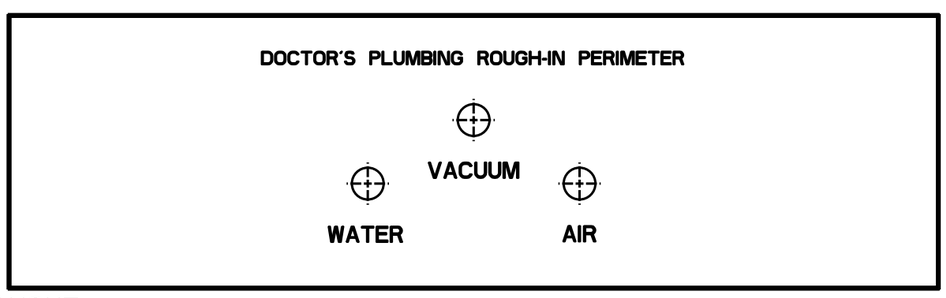

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.



General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.



WALL PLUMBING LAYOUT

DM-SDL003, DM-SDL003SS
DK-SDR003, DK-SDR003SS
Short Arm Side Delivery Casework
Right Hand Storage
003-0983-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003 0983 00_2 DATE:24 Jul 01 12:54:46

Go To Table Contents

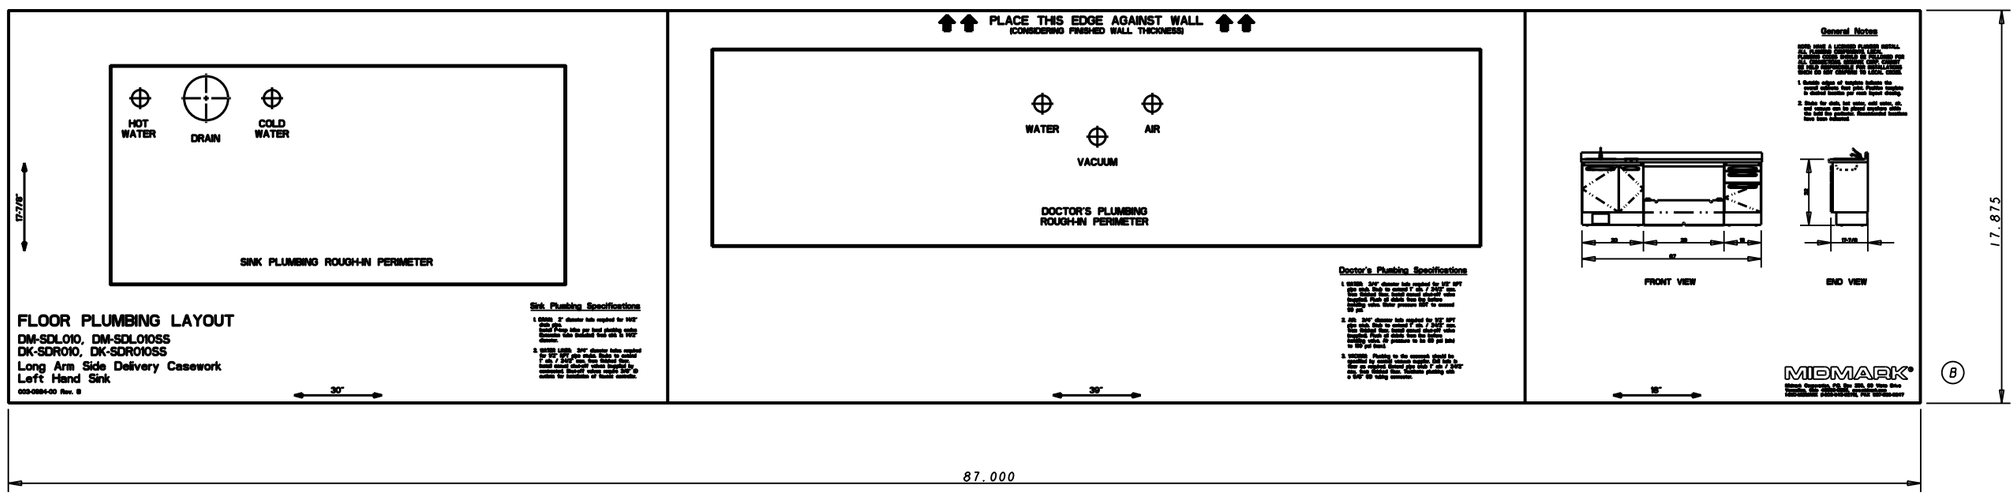

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS DK-SDR010SS, DM-SDL010, AND DM-SDL010SS. "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES

ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.313 | CK BY DATE

SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 17-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, FLOOR, DM-SDL010

PART NUMBER: 003-0984-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0984-00_1 DATE: 24-Jul-01 10:28:33

Go To Table Contents

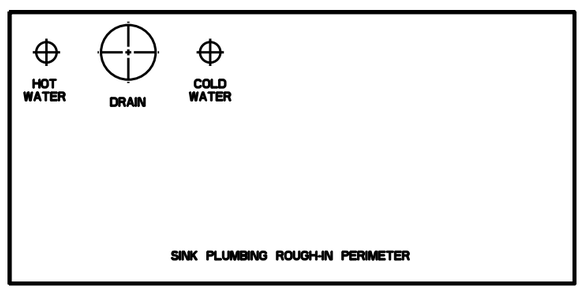

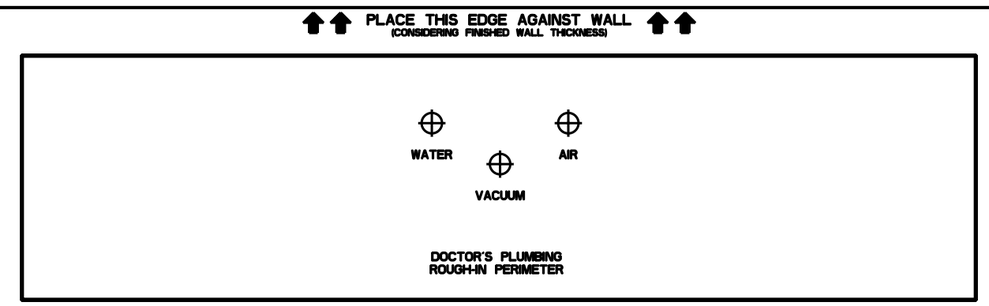

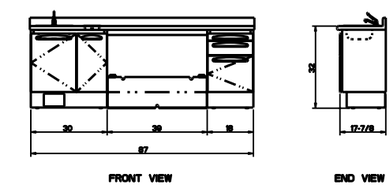

FLOOR PLUMBING LAYOUT

DM-SDL010, DM-SDL010SS
DK-SDR010, DK-SDR010SS
Long Arm Side Delivery Casework
Left Hand Sink

003-0984-00 Rev. B

30"

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1½" O.D. PVC drain tube per local plumbing codes. Extension tube included that sits in 1½" diameter.
2. ENTER LEGS: 3/4" diameter holes required for 1/2" NPT pipe nipple. Holes to extend 1" abv / 3½" aww. Hole limited four. Install manual shutoff valves (supplied by contractor) Sheroff valves angled 3/8" O entries for installation of faucet controller.

39"

Doctor's Plumbing Specifications

1. ENTER: 3/4" diameter hole required for 1/2" NPT pipe nipple. Hole to extend 1" abv / 3½" aww. Hole limited four. Install manual shutoff valves (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe nipple. Hole to extend 1" abv / 3½" aww. Hole limited four. Install manual shutoff valves (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min to 100 psi (max).
3. VACUUM: Plumbing to the vacuum should be specified by sterile vacuum supplier. Drill hole in floor as required. Extend pipe nipple 1" abv / 3½" aww. Hole limited four. Terminate plumbing with a 3/4" OD tubing connector.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinet floor print. Position template in desired location per room layout drawing.
2. Holes for drain, hot water, cold water, air, and vacuum can be placed anywhere within the hold line perimeter. Recommended locations have been indicated.

18"

MIDMARK®

Midmark Corporation, P.O. Box 392, 60 Vista Drive
Versailles, Ohio 45380-0392, www.midmark.com
1-800-643-6275 (1-800-643-6275), FAX: 937-526-2947

SCALE 0.313

NAME:DLANGENKAMP OBJECT:003-0984-02 DATE:2-16-1 Jul-01 10:28:34

Go To Table Contents

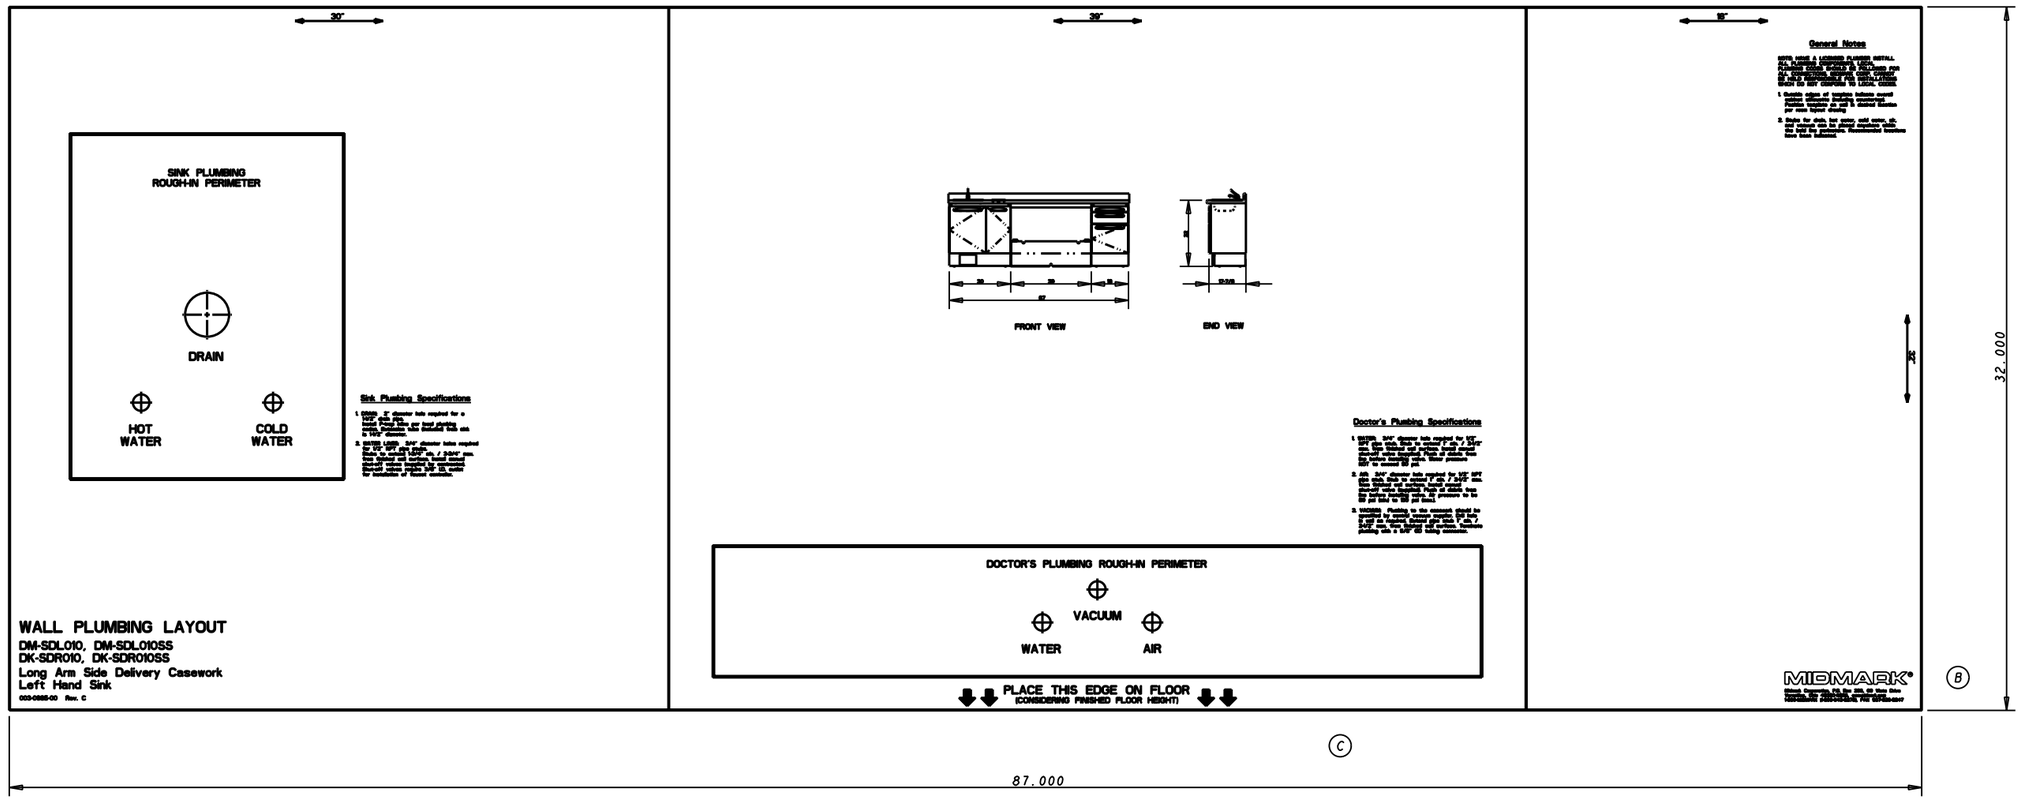

NAME: DLANGENKAMP OBJECT: 003-0985-00_1 DATE: 24-Jul-01 13:22:19

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M14208	10/10/00	SLS	REVISE HEIGHT OF DOCTORS PLUMBING ROUGH-IN PERIMETER	C
M13947	7/03/00	MRH	ADD MODELS DK-SDR010SS, DM-SDL010, AND DM-SDL010SS. "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.313 | CH BY DATE

SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 17-Sep-98

PART NAME TEMPLATE, WALL, DM-SDL010

APPROVED BY PROJECT ENGINEER | DATE

PART NUMBER 003-0985-00 | REV C

Go To Table Contents

30"

SINK PLUMBING
ROUGH-IN PERIMETER

DRAIN

HOT WATER

COLD WATER

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1½" drain pipe.
   Install P-trap tube or local plumbing codes. Extension tube included from sink is 1½" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs.
   Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by customer). Shut-off valves require 3/8" ID. outlet for installation of faucet connector.

39"



FRONT VIEW



END VIEW

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the cassapt should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 3-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

DOCTOR'S PLUMBING ROUGH-IN PERIMETER

VACUUM

WATER

AIR

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

18"

General Notes

NOTE: HIRE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette including countertop. Position template on wall in desired location per room layout drawing.
2. Holes for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

32"

MIDMARK®

Midmark Corporation, P.O. Box 392, 60 Vista Drive
Versailles, Ohio 45380-0392, USA www.midmark.com
PHONE/MESSAGE: (800)-643-6275, FAX: (937)526-2427

WALL PLUMBING LAYOUT

DM-SDL010, DM-SDL010SS
DR-SDR010, DK-SDR010SS
Long Arm Side Delivery Casework
Left Hand Sink

DOC-0985-00 Rev. C

OBJECT: 0985-00_2 DATE: 24-Jul-01 13:22:17

NAME: DLANGENKAMP

Go To Table Contents

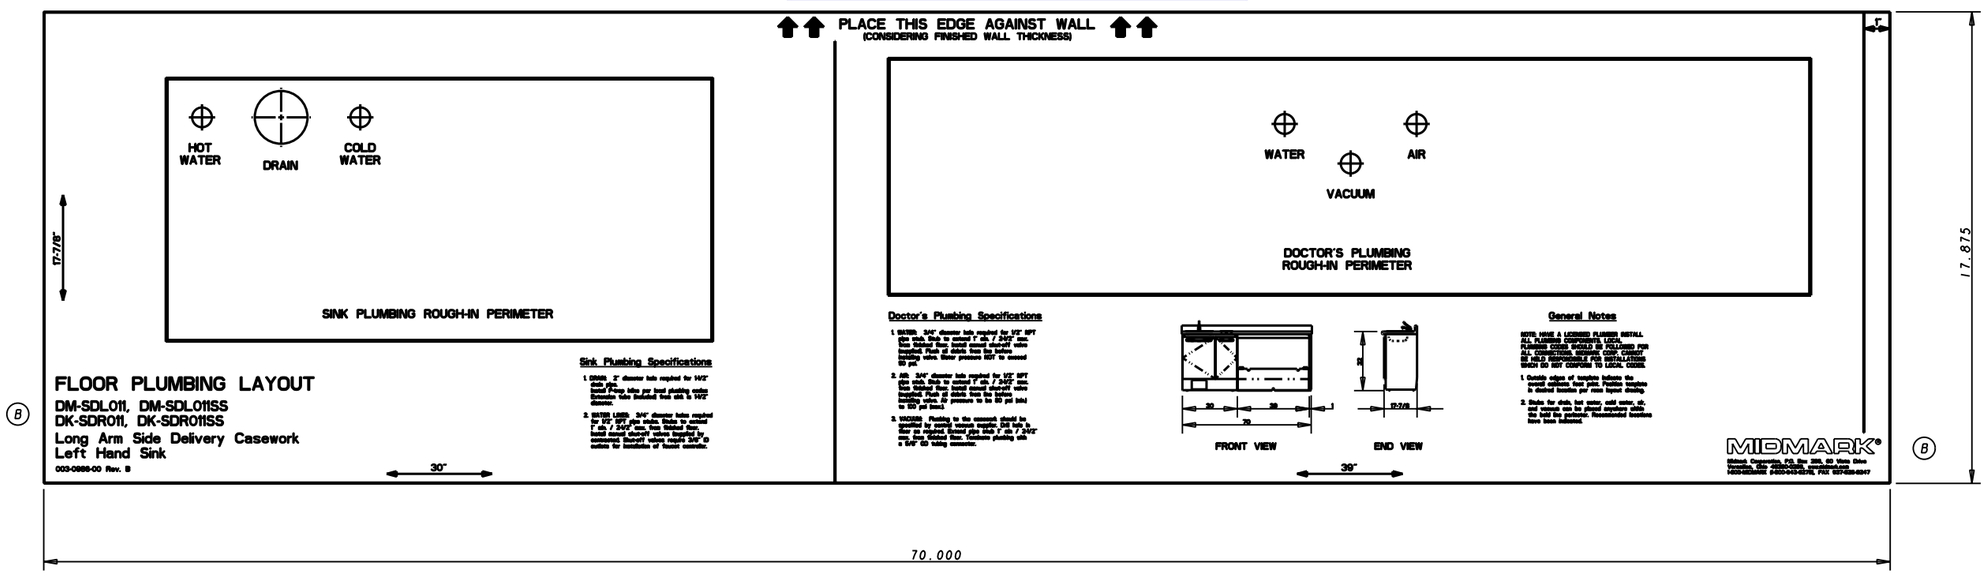

FLOOR PLUMBING LAYOUT

DM-SDL011, DM-SDL011SS
DK-SDR011, DK-SDR011SS
Long Arm Side Delivery Casework
Left Hand Sink

003-0986-00 Rev. B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDR011SS, DM-SDL011, AND DM-SDL011SS. "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY DATE
PREPARED BY S.STRAIT | DATE 17-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2
PART NAME: TEMPLATE, FLOOR, DM-SDL011
PART NUMBER: 003-0986-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0986-00_1 DATE: 24-Jul-01 10:40:19

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

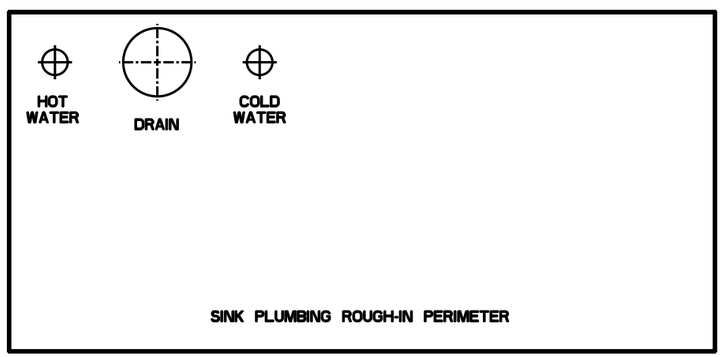

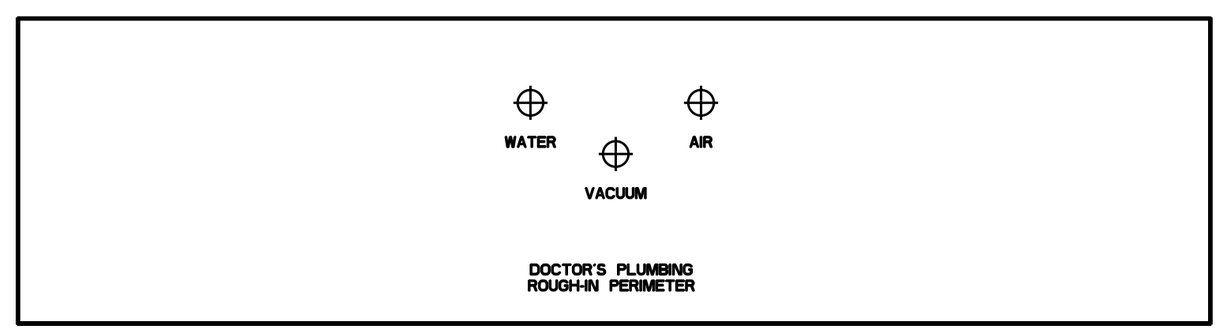

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1-1/2" drain pipe.
   Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" ID orifice for installation of faucet controller.

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 120 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.



General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CORRECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

FLOOR PLUMBING LAYOUT

DM-SDL011, DM-SDL011SS
DK-SDR011, DK-SDR011SS
Long Arm Side Delivery Casework
Left Hand Sink

XXX-0986-00 Rev. B

30"

MIDMARK®
Midmark Corporation, P.O. Box 296, 60 Vista Drive
Versailles, Ohio 45380-0296, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: D_00_2 DATE: 24-Jul-01 10:40:20

SCALE 0.375

Go To Table Contents

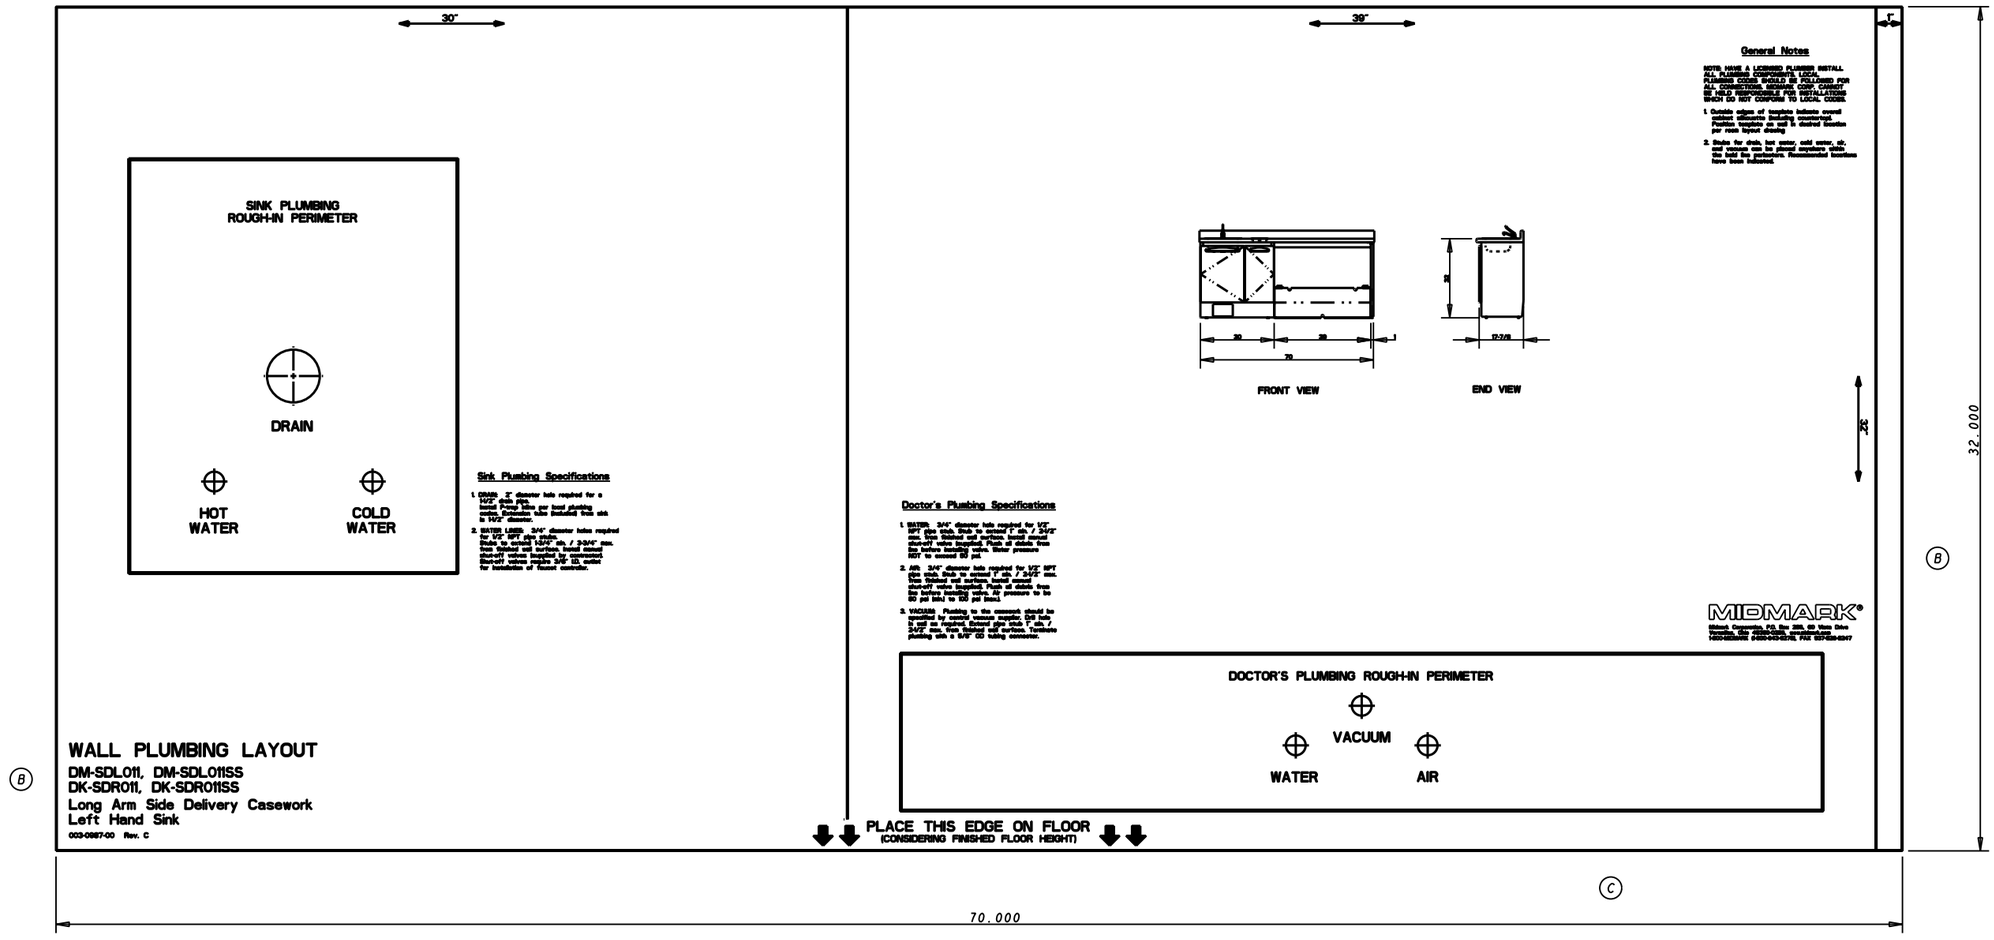

WALL PLUMBING LAYOUT

DM-SDL011, DM-SDL011SS
DK-SDR011, DK-SDR011SS
Long Arm Side Delivery Casework
Left Hand Sink

003-0987-00 Rev. C

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M14208	10/10/00	SLS	REVISE HEIGHT OF DOCTORS PLUMBING ROUGH-IN PERIMETER	C
M13947	7/03/00	MRH	ADD MODELS DK-SDR011SS, DM-SDL011, AND DM-SDL011SS. "MIDMARK" WAS "WRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY | DATE
PREPARED BY S.STRAIT | DATE 17-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2
PART NAME: TEMPLATE, WALL, DM-SDL011
PART NUMBER: 003-0987-00 | REV C

NAME: DLANGENKAMP OBJECT: 003-0987-00_1 DATE: 24-Jul-01 13:25:21

Go To Table Contents

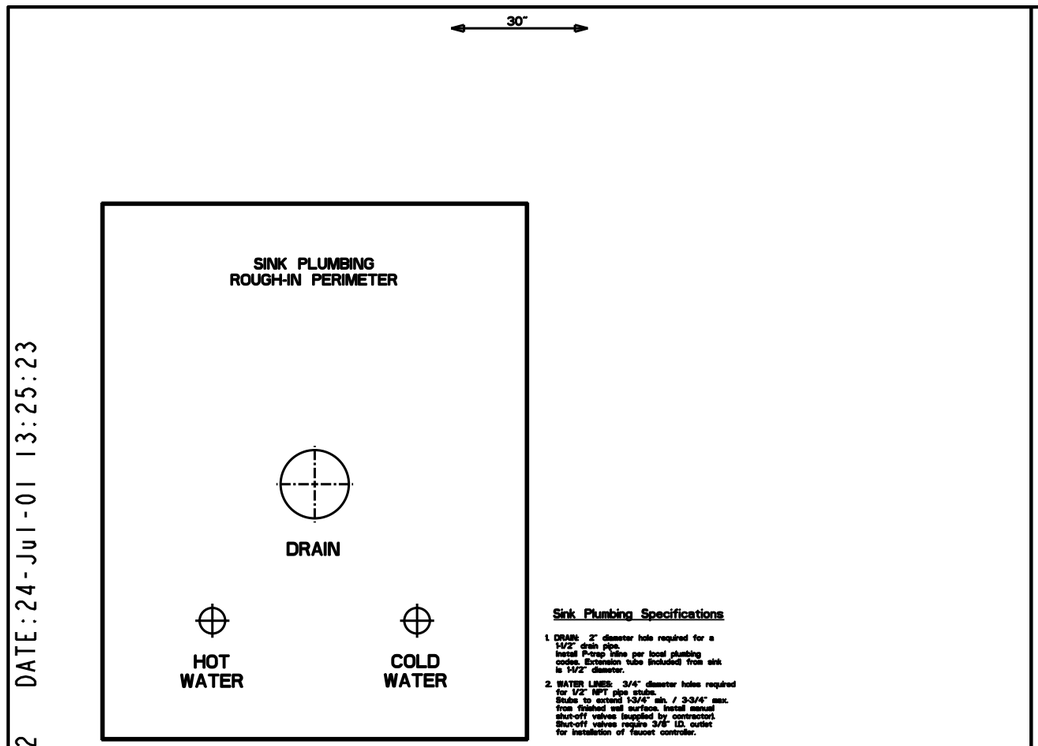

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1½" drain pipe.
   Install P-trap tube per local plumbing codes. Extension tube (included) from sink is 1½" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs.
   Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by connector). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

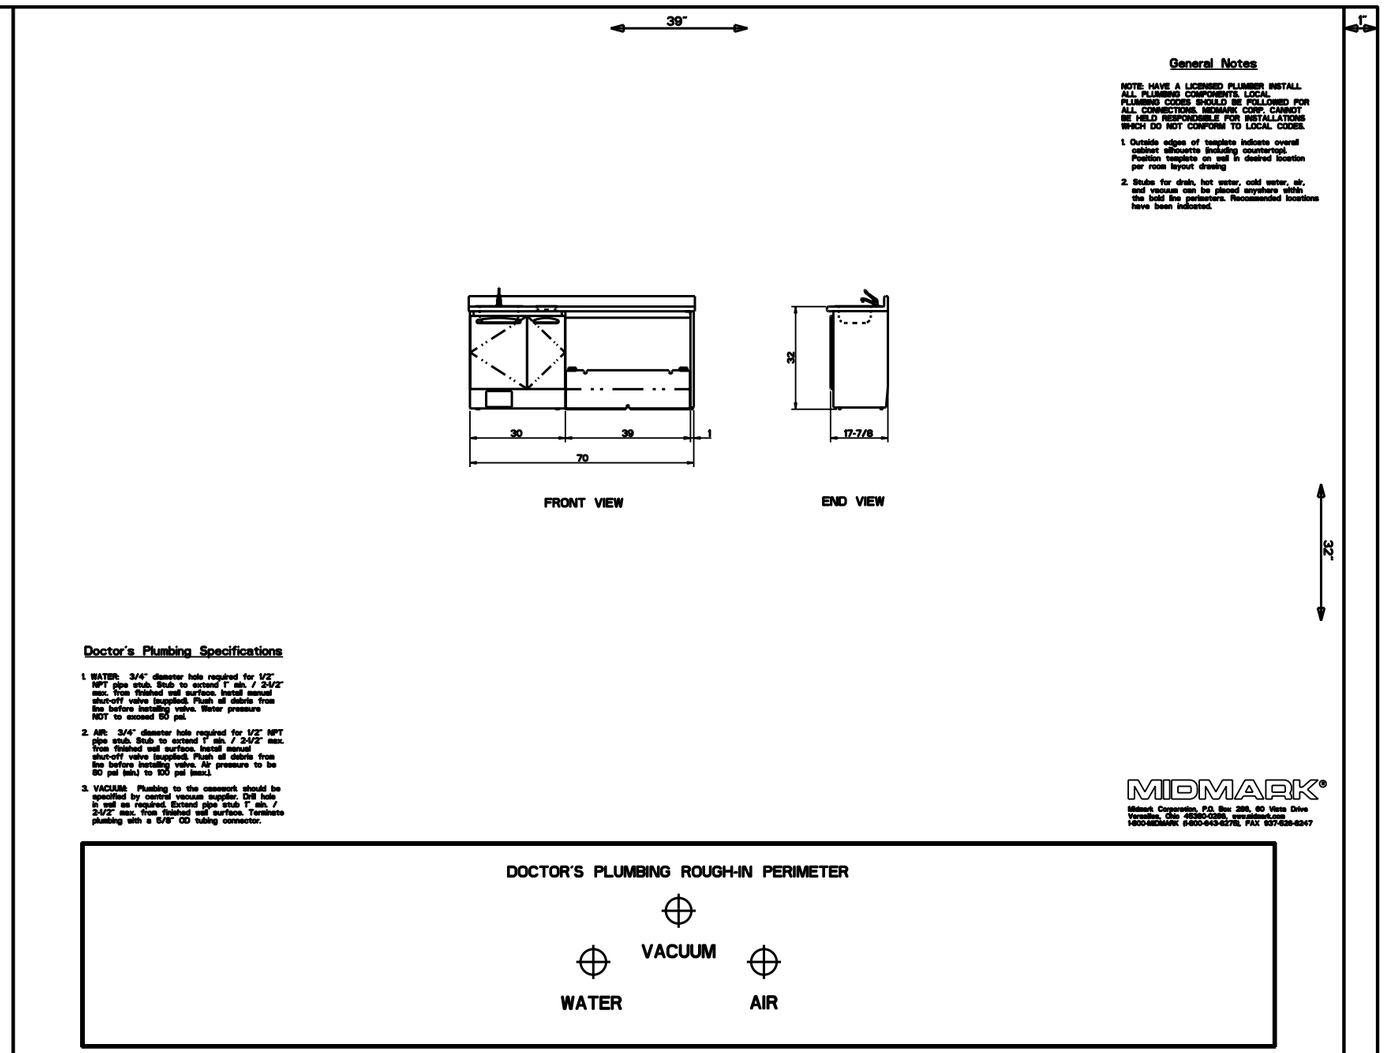

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

WALL PLUMBING LAYOUT

DM-SDL011, DM-SDL011SS
DK-SDR011, DK-SDR011SS
Long Arm Side Delivery Casework
Left Hand Sink

003-0987-00 Rev. C

NAME: DLANGENKAMP DATE: 24-Jul-01 13:25:23
PROJECT: 003-0987-00_2

Go To Table Contents

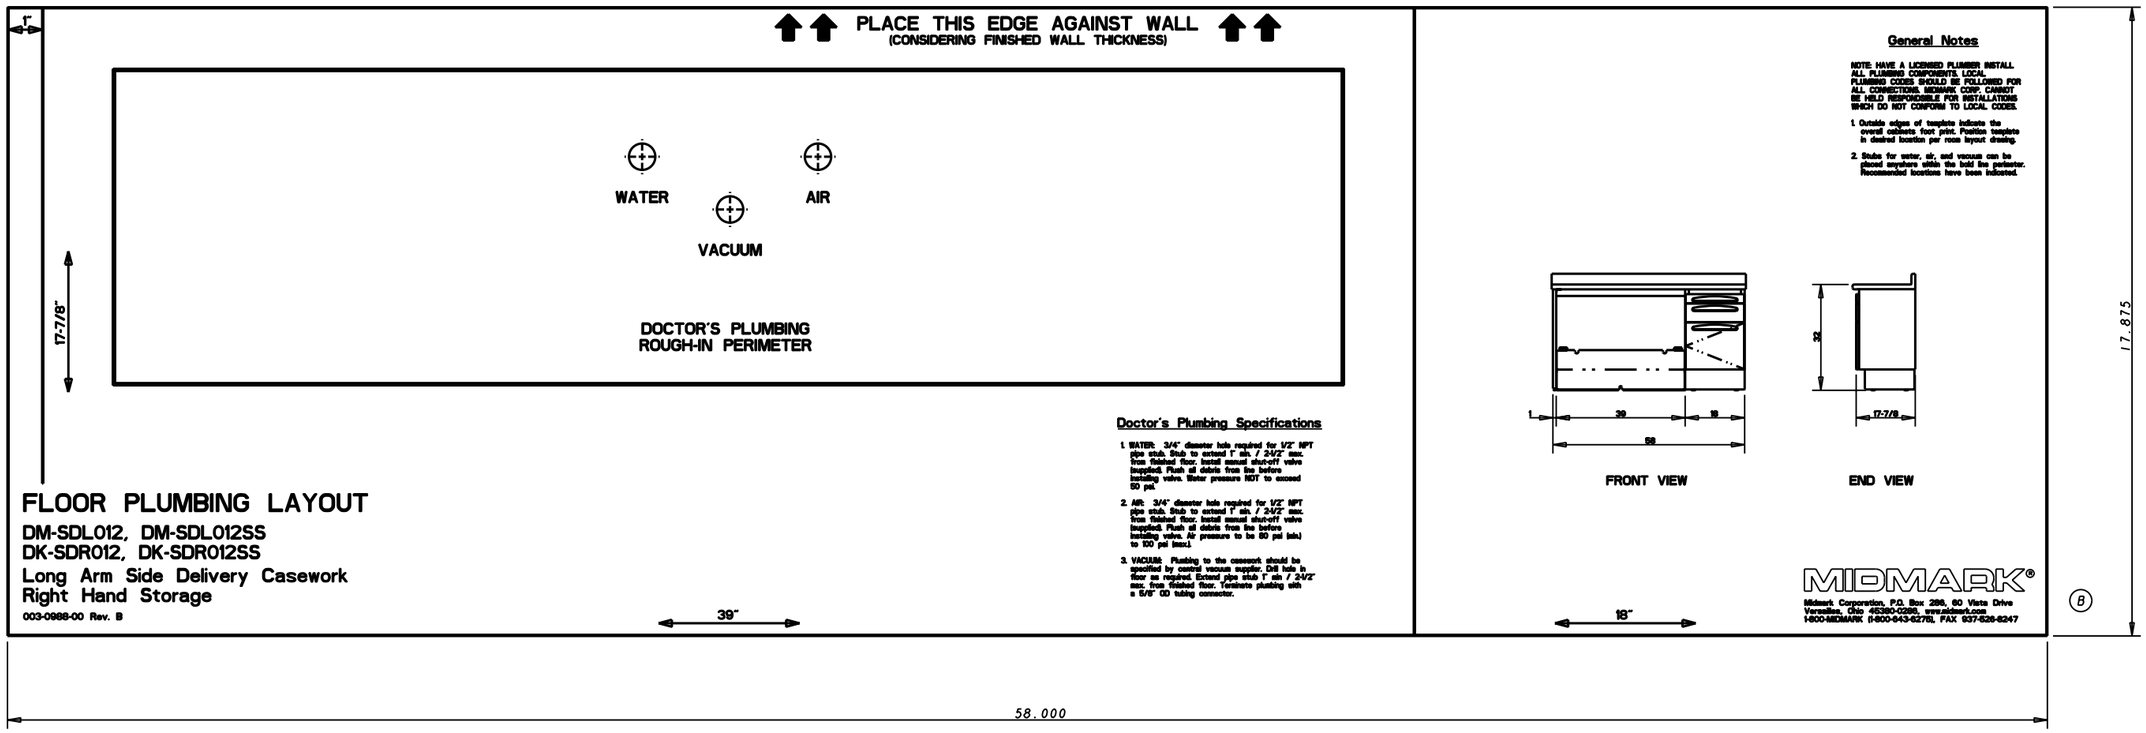

FLOOR PLUMBING LAYOUT

DM-SDL012, DM-SDL012SS
DK-SDR012, DK-SDR012SS
Long Arm Side Delivery Casework
Right Hand Storage
003-0988-00 Rev. B

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDR012SS, DM-SDL012, AND DM-SDL012SS. "MIDMARK" WAS "WRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE
SCALE: 0.500
CK BY / DATE
PREPARED BY: S.STRAIT — DATE: 17-Sep-98
APPROVED BY PROJECT ENGINEER — DATE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SHEET 1 OF 2

PART NAME: TEMPLATE, FLOOR, DM-SDL012
PART NUMBER: 003-0988-00
REV: B

NAME: DLANGENKAMP OBJECT: 003-0988-00_1 DATE: 24-Jul-01 10:48:57

Go To Table Contents

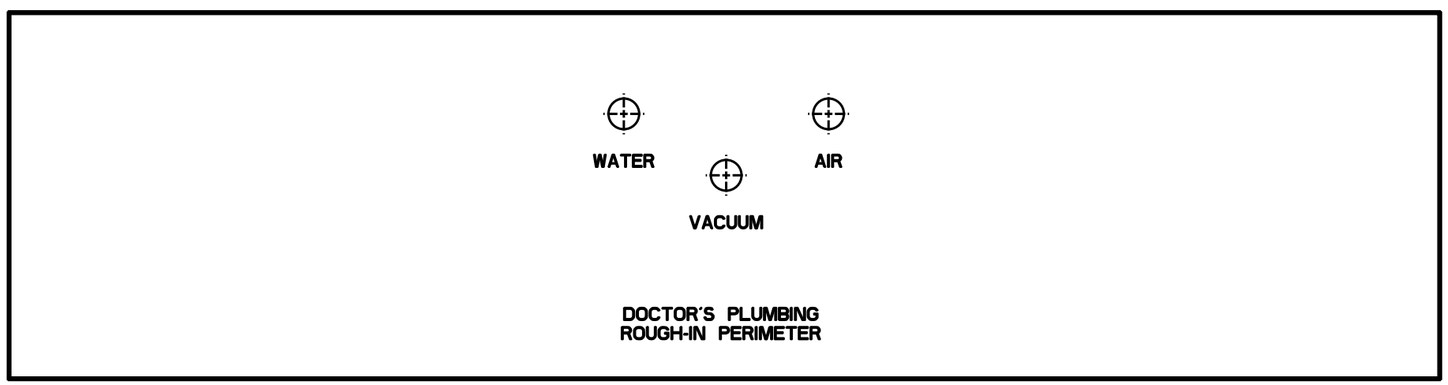

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

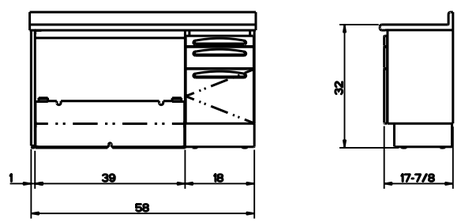

FRONT VIEW

END VIEW

18"

FLOOR PLUMBING LAYOUT

DM-SDL012, DM-SDL012SS
DK-SDR012, DK-SDR012SS
Long Arm Side Delivery Casework
Right Hand Storage

003-0988-00 Rev. B

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

OBJECT: 003-0988-00_2 DATE: 24-Jul-01 10:48:58

NAME: DLANGENKAMP

SCALE 0.500

Go To Table Contents

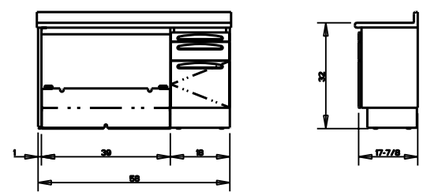

FRONT VIEW

END VIEW

WALL PLUMBING LAYOUT

DM-SDL012, DM-SDL012SS
DK-SDR012, DK-SDR012SS
Long Arm Side Delivery Casework
Right Hand Storage

003-0989-00 Rev. C

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

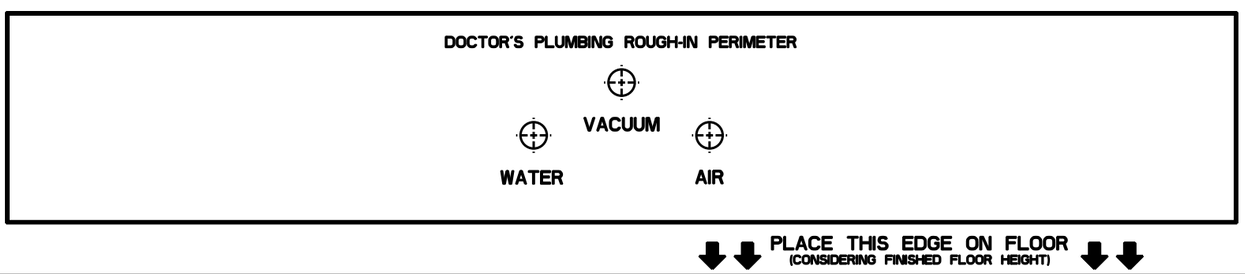

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

18" · 39" · 32" · 32.000 · 58.000

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M14208	10/10/00	SLS	REVISE HEIGHT OF DOCTOR'S PLUMBING ROUGH-IN PERIMETER	C
M13947	7/03/00	SLS	ADD MODELS DK-SDR012SS, DM-SDL012, AND DM-SDL012SS. "MIDMARK" WAS WRIGHT BY MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE | SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 17-Sep-98 | PART NAME TEMPLATE, WALL, DM-SDL012

APPROVED BY PROJECT ENGINEER | DATE | PART NUMBER 003-0989-00 | REV C

NAME: DLANGENKAMP OBJECT: 003-0989-00_1 DATE: 24-Jul-01 13:27:18

Go To Table Contents

1"

39"



FRONT VIEW



END VIEW

WALL PLUMBING LAYOUT

DM-SDL012, DM-SDL012SS
DK-SDR012, DK-SDR012SS
Long Arm Side Delivery Casework
Right Hand Storage

003-0989-00 Rev. C

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

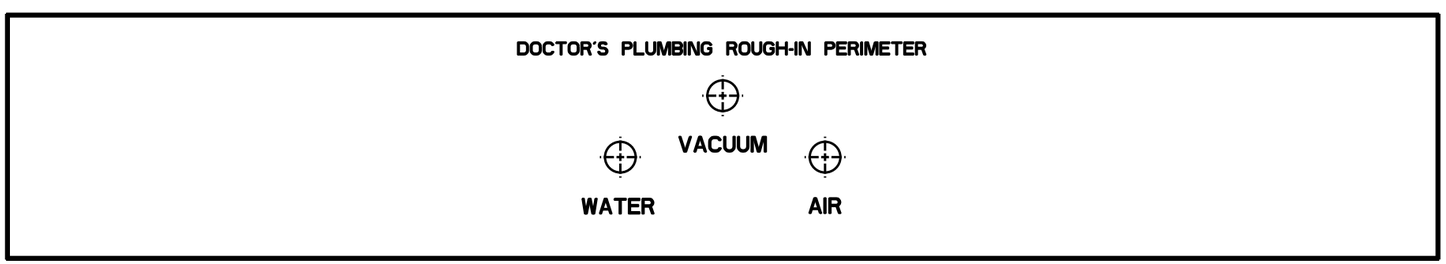

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

18"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

32"

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: 003-0989-00_2 DATE: 24-Jul-01 13:27:18

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)



END VIEW



FRONT VIEW

17-7/8"

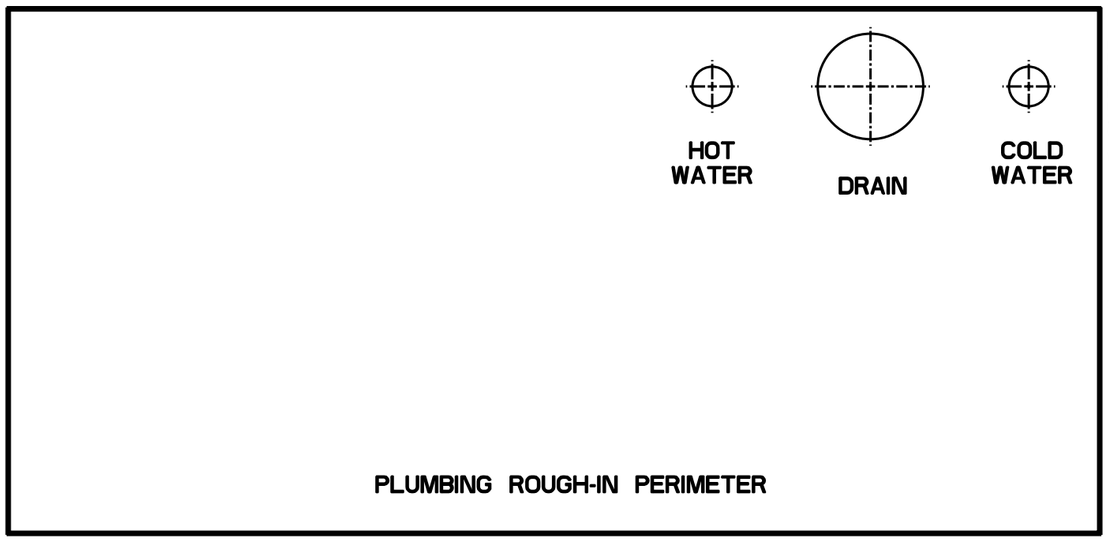

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

FLOOR PLUMBING LAYOUT

DM-SKR001, DM-SKR001SS
DK-SKL001, DK-SKL001SS

Multi-Operatory Sink Casework
Right Hand Sink

003-0990-00 Rev. B

30"

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

17.875

30.000

B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SKL001SS, DM-SKR001, AND DM-SKR001SS. "MIDMARK" WAS "WRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.750 | CK BY DATE

PREPARED BY S.STRAIT | DATE 17-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2

PART NAME: TEMPLATE, FLOOR, DM-SKR001

PART NUMBER: 003-0990-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0990-00_1 DATE: 24-Jul-01 10:53:57

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)



END VIEW



FRONT VIEW

17-7/8"

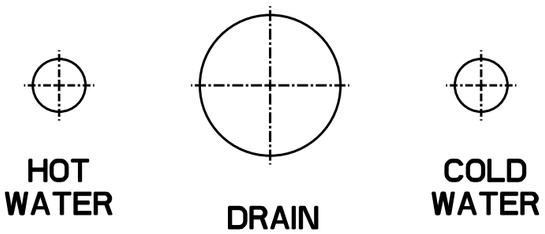

PLUMBING ROUGH-IN PERIMETER

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

FLOOR PLUMBING LAYOUT

DM-SKR001, DM-SKR001SS
DK-SKL001, DK-SKL001SS

Multi-Operatory Sink Casework
Right Hand Sink

003-0990-00 Rev. B

30"

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0990-00_2 DATE:24-Jul-01 10:53:58

Go To Table Contents



FRONT VIEW

END VIEW

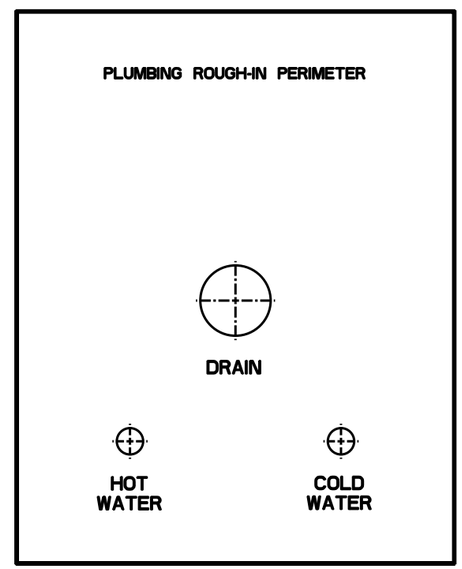

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

WALL PLUMBING LAYOUT

DM-SKR001, DM-SKR001SS
DK-SKL001, DK-SKL001SS
Multi-Operatory Sink Casework
Right Hand Sink

003-0991-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247





NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SKL001SS, DM-SKR001, AND DM-SKR001SS. "MIDMARK" WAS "KNIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE: 0.500 | CK BY DATE
PREPARED BY: S.STRAIT | DATE: 17-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2
PART NAME: TEMPLATE, WALL, DM-SKR001
PART NUMBER: 003-0991-00 | REV: C

NAME: DLANGENKAMP OBJECT: 003-0991-00_1 DATE: 24-Jul-01 13:29:58



FRONT VIEW



END VIEW

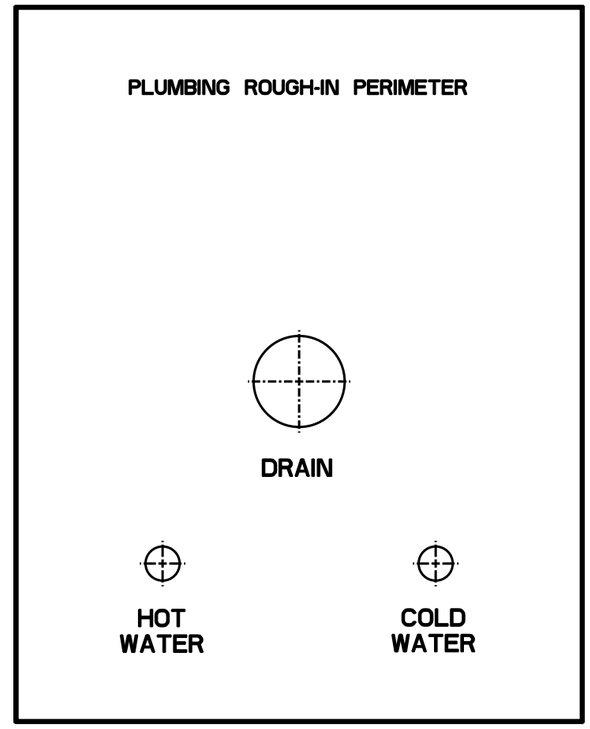

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

WALL PLUMBING LAYOUT

DM-SKR001, DM-SKR001SS
DK-SKL001, DK-SKL001SS
Multi-Operatory Sink Casework
Right Hand Sink

003-0991-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0991-00_2 DATE:24-Jul-01 13:29:58

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

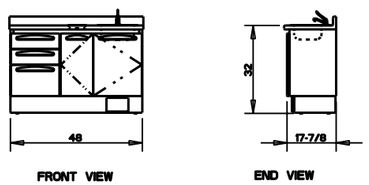

Model DM-ASR002 shown

17-7/8"

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.



PLUMBING ROUGH-IN PERIMETER

17.875

FLOOR PLUMBING LAYOUT

DM-DRR001, DM-DRR001SS, DM-ASR001, DM-ASR001SS
DM-ASR002, DM-ASR002SS, DK-DRL001, DK-DRL001SS
DK-ASL001, DK-ASL001SS, DK-ASL002, DK-ASL002SS
Right Hand Sink

003-0992-00 Rev. B

(B)

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

(B)

48"

48.000

(B)

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-DRL001SS, DK-ASL001SS, DK-ASL002SS, DM-DRR001, DM-DRR001SS, DM-ASR001, DM-ASR001SS, DM-ASR002, DM-ASR002SS, "MIDMARK" WAS "RAILIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2
ECO NO	DATE	CH BY	CHANGE	REV

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 17-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, FLR, RH SINK CSWRK

PART NUMBER: 003-0992-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0992-00_I DATE: 24-Jul-01 11:54:36

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)



FRONT VIEW



END VIEW

Model DM-ASR002 shown

17-7/8"

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

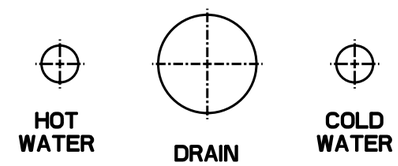

PLUMBING ROUGH-IN PERIMETER

FLOOR PLUMBING LAYOUT

DM-DRR001, DM-DRR001SS, DM-ASR001, DM-ASR001SS DM-ASR002, DM-ASR002SS, DK-DRL001, DK-DRL001SS DK-ASL001, DK-ASL001SS, DK-ASL002, DK-ASL002SS

Right Hand Sink

003-0992-00 Rev. B

48"

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

OBJECT:003-0992-00_2 DATE:24-Jul-01 11:54:37
NAME:DLANGENKAMP

Go To Table Contents

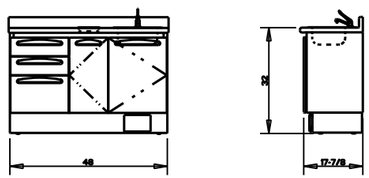

FRONT VIEW

END VIEW

Model DM-ASR002 shown

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing.

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe.
   Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs.
   Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

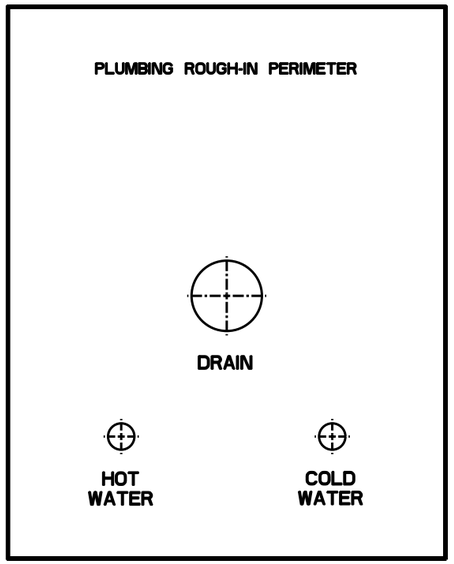

WALL PLUMBING LAYOUT

DM-DRR001, DM-DRR001SS, DM-ASR001, DM-ASR001SS
DM-ASR002, DM-ASR002SS, DK-DRL001, DK-DRL001SS
DK-ASL001, DK-ASL001SS, DK-ASL002, DK-ASL002SS
Right Hand Sink

003-0993-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

32.000

48.000

B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-DRL001SS, DK-ASL001SS, DK-ASL002SS, DM-DRR001, DM-DRR001SS, DM-ASR001, DM-ASR001SS, DM-ASR002, DM-ASR002SS. "MIDMARK" WAS "KNIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION. ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE | SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 17-Sep-98 | PART NAME: TEMPLATE, WALL, RH SINK CSWRK

APPROVED BY PROJECT ENGINEER | DATE | PART NUMBER: 003-0993-00 | REV: C

NAME: DLANGENKAMP OBJECT: 003-0993-00_1 DATE: 24-Jul-01 13:31:32

48"



FRONT VIEW



END VIEW

Model DM-ASR002 shown

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Plumbing Specifications

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stubs for drain, hot water, and cold water can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.
2. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap inline per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
3. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

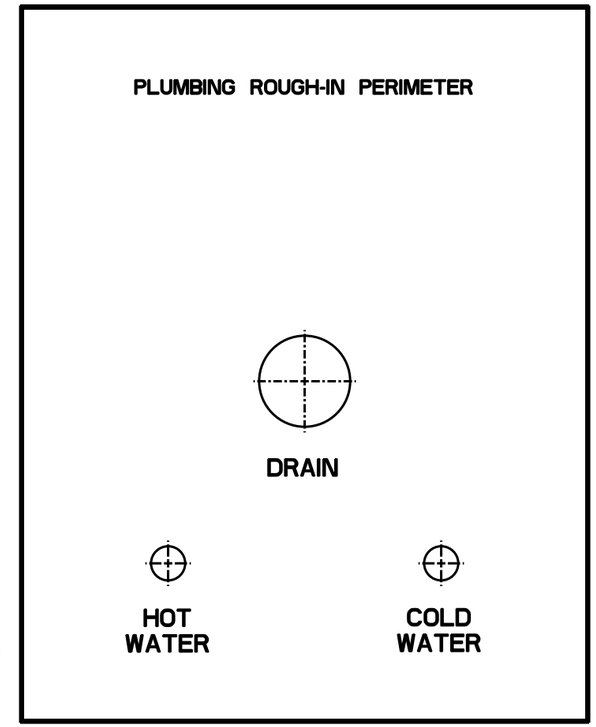

WALL PLUMBING LAYOUT

DM-DRR001, DM-DRR001SS, DM-ASR001, DM-ASR001SS
DM-ASR002, DM-ASR002SS, DK-DRL001, DK-DRL001SS
DK-ASL001, DK-ASL001SS, DK-ASL002, DK-ASL002SS
Right Hand Sink

003-0993-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: 003-0993-00_2 DATE: 24-Jul-01 13:31:33

Go To Table Contents

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

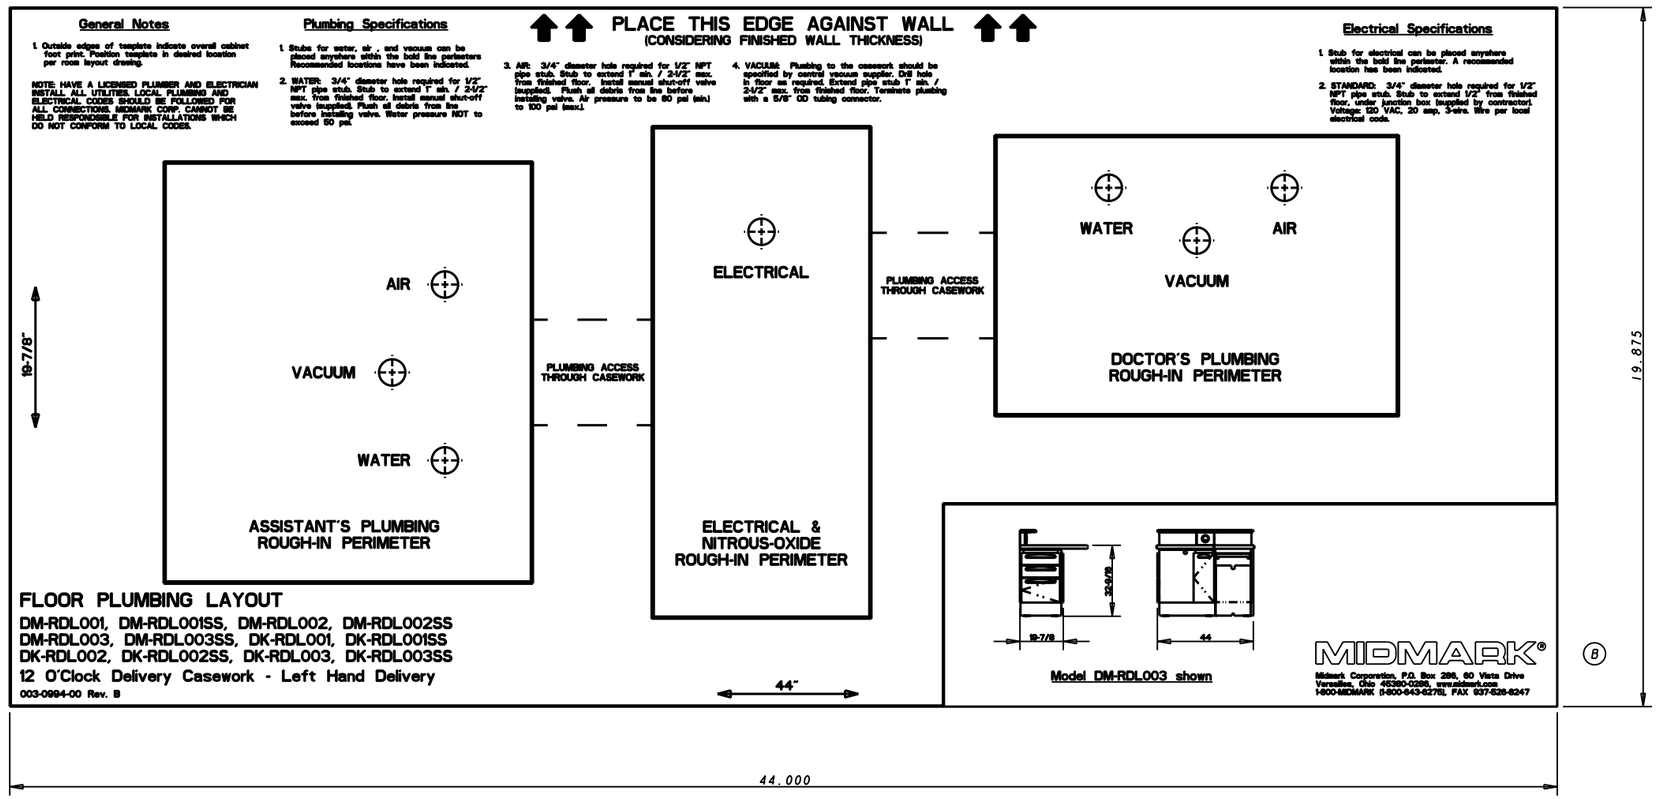

FLOOR PLUMBING LAYOUT

DM-RDL001, DM-RDL001SS, DM-RDL002, DM-RDL002SS
DM-RDL003, DM-RDL003SS, DK-RDL001, DK-RDL001SS
DK-RDL002, DK-RDL002SS, DK-RDL003, DK-RDL003SS
12 O'Clock Delivery Casework - Left Hand Delivery
003-0994-00 Rev. B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS DK-RDL001SS, DK-RDL002SS, DK-RDL003SS, DM-RDL001, DM-RDL001SS, DM-RDL002, DM-RDL002SS, DM-RDL003, DM-RDL003SS. "MIDMARK" WAS "WRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE | SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 18-Sep-98 | PART NAME TEMPLATE, FLOOR, DM-RDL00X

APPROVED BY PROJECT ENGINEER | DATE | PART NUMBER 003-0994-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0994-00_1 DATE: 24-Jul-01 12:02:56

Go To Table Contents

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

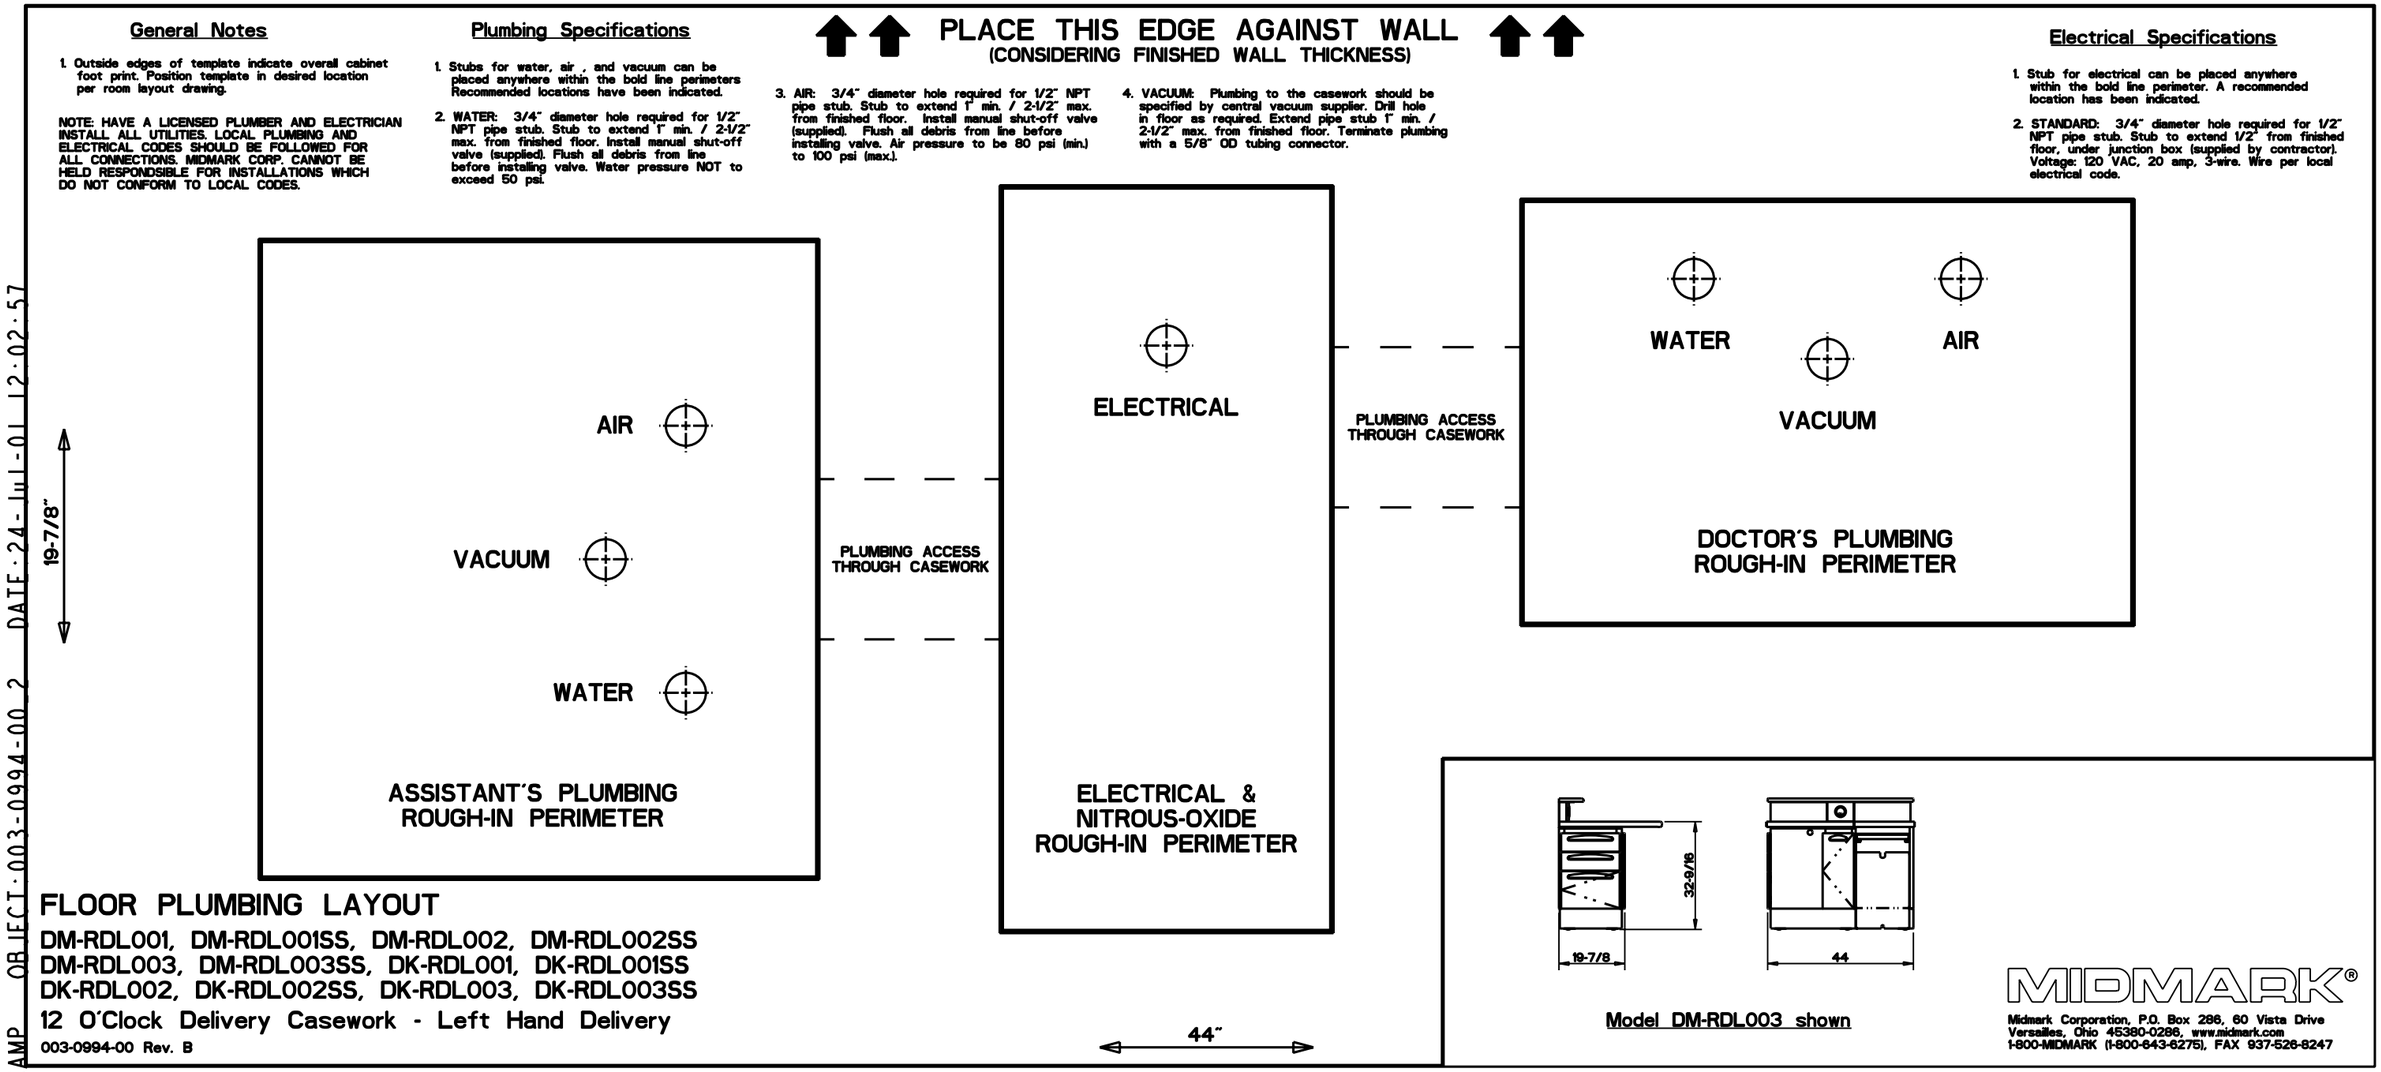

FLOOR PLUMBING LAYOUT

DM-RDL001, DM-RDL001SS, DM-RDL002, DM-RDL002SS
DM-RDL003, DM-RDL003SS, DK-RDL001, DK-RDL001SS
DK-RDL002, DK-RDL002SS, DK-RDL003, DK-RDL003SS

12 O'Clock Delivery Casework - Left Hand Delivery

003-0994-00 Rev. B

Model DM-RDL003 shown

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: 003-0994-00_2 DATE: 24-Jul-01 12:02:57
SCALE 0.500

Go To Table Contents

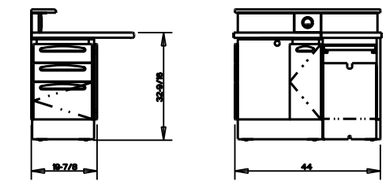

Model DM-RDL003 shown

General Notes

1. Outside edges of template indicate overall cabinet silhouette including countertop. Position template on wall in desired location per room layout drawing

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. KNIGHT CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stub for water, air, and vacuum can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. WATER: 3/4" diameter hole required for a 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

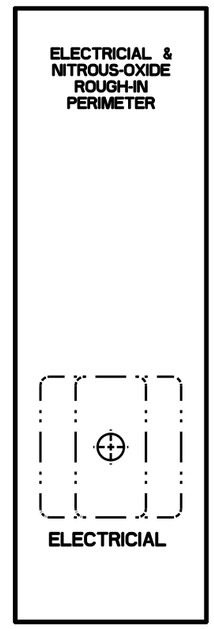

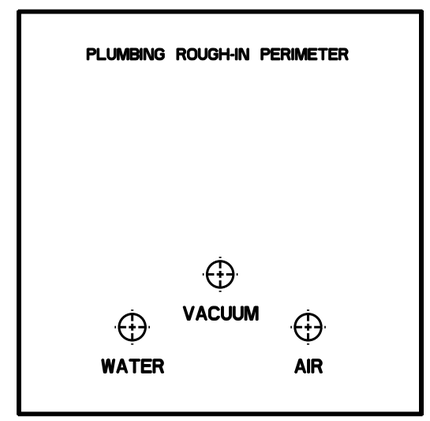

44"

32-9/16"

32.562

44.000

WALL PLUMBING LAYOUT

DM-RDL001, DM-RDL001SS, DM-RDL002, DM-RDL002SS
DM-RDL003, DM-RDL003SS, DK-RDL001, DK-RDL001SS
DK-RDL002, DK-RDL002SS, DK-RDL003, DL-RDL003SS

12 O'Clock Delivery Casework
Left Hand Delivery

003-0995-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

B

NAME: DLANGENKAMP OBJECT: 003-0995-00_1 DATE: 24-Jul-01 13:33:22

B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DM-RDL001SS, DK-RDL002SS, DK-RDL003SS, DM-RDL001, DM-RDL001SS, DM-RDL002, DM-RDL002SS, DM-RDL003, DM-RDL003SS. "MIDMARK" WAS "RIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 18-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, WALL, DM-RDL00x

PART NUMBER: 003-0995-00 | REV C

NAME:DLANGENKAMP OBJECT:003-0995-00_2 DATE:24-Jul-01 13:33:23

44"

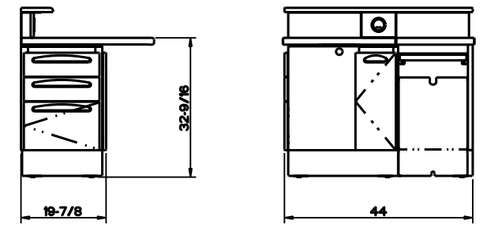

Model DM-RDL003 shown

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. KNIGHT CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stub for water, air, and vacuum can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. WATER: 3/4" diameter hole required for a 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

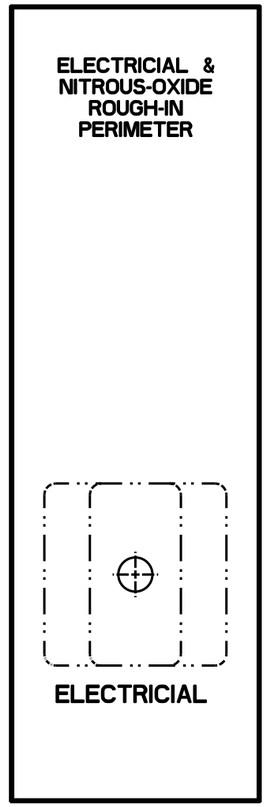

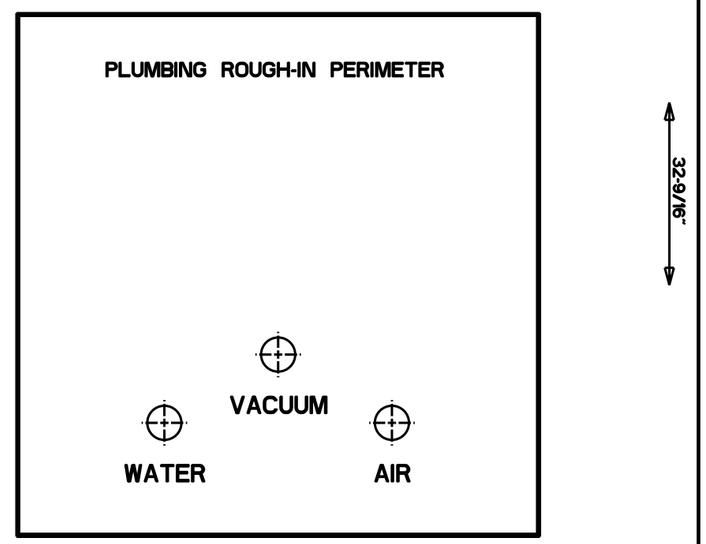

WALL PLUMBING LAYOUT

DM-RDL001, DM-RDL001SS, DM-RDL002, DM-RDL002SS
DM-RDL003, DM-RDL003SS, DK-RDL001, DK-RDL001SS
DK-RDL002, DK-RDL002SS, DK-RDL003, DL-RDL003SS
12 O'Clock Delivery Casework
Left Hand Delivery

003-0995-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

Go To Table Contents

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 24/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 24/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 24/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

Model DM-RTL003 shown

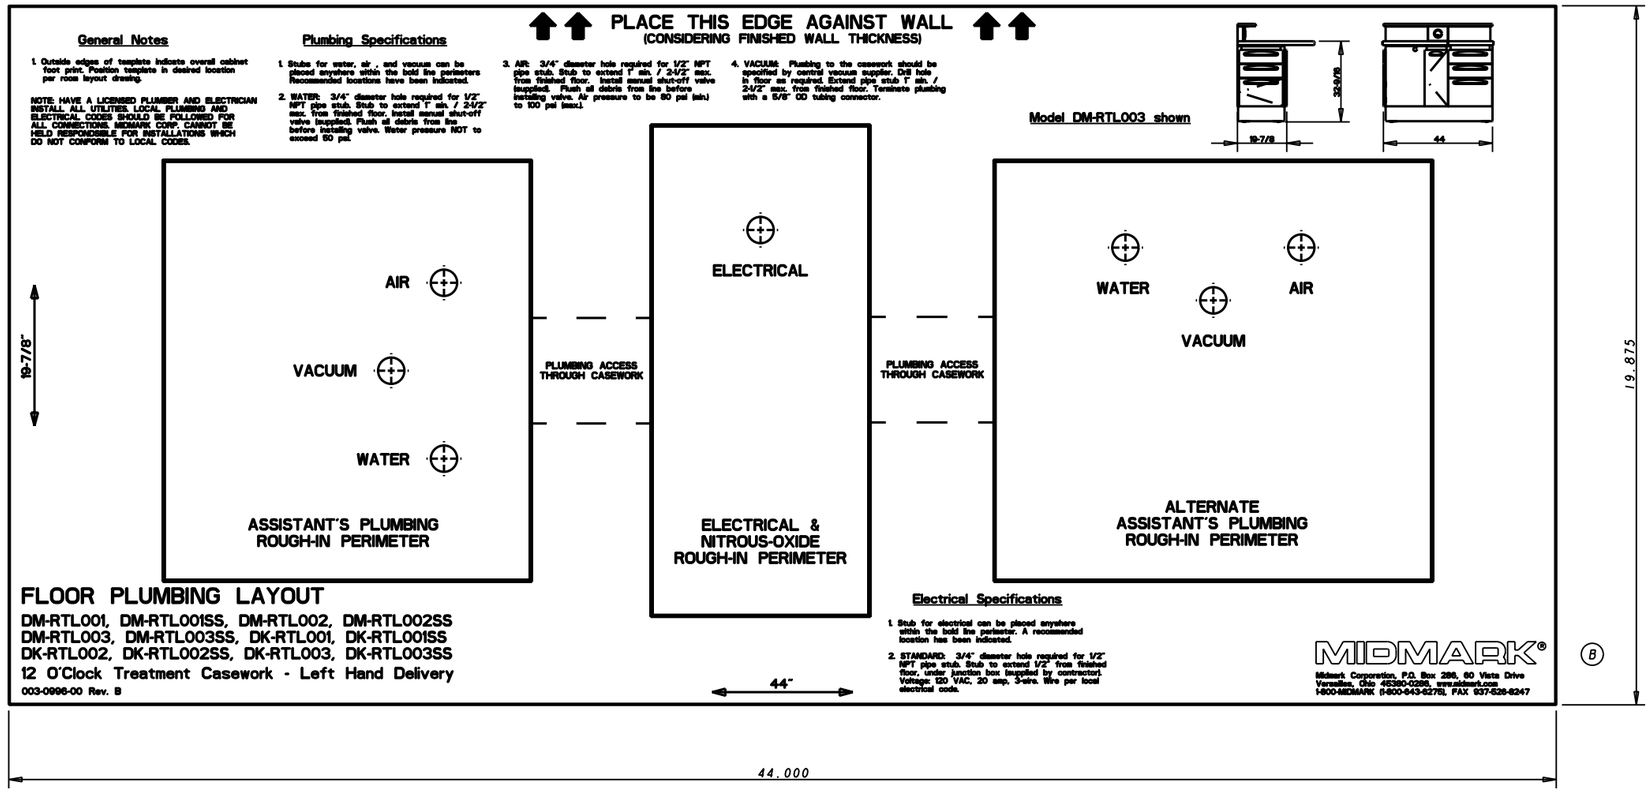

FLOOR PLUMBING LAYOUT

DM-RTL001, DM-RTL001SS, DM-RTL002, DM-RTL002SS
DM-RTL003, DM-RTL003SS, DK-RTL001, DK-RTL001SS
DK-RTL002, DK-RTL002SS, DK-RTL003, DK-RTL003SS
12 O'Clock Treatment Casework - Left Hand Delivery

003-0996-00 Rev. B

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-RTL001SS, DK-RTL002SS, DK-RTL003SS, DM-RTL001, DM-RTL001SS, DM-RTL002, DM-RTL002SS, DM-RTL003, DM-RTL003SS. "MIDMARK" WAS "BRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE
PREPARED BY S.STRAIT | DATE 18-Sep-98
APPROVED BY PROJECT ENGINEER | DATE

SHEET 1 OF 2

PART NAME: TEMPLATE, FLOOR, DM-RTL00x
PART NUMBER: 003-0996-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0996-00_1 DATE: 24-Jul-01 12:05:46

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

General Notes

1. Outside edges of template indicate overall cabinet foot print. Position template in desired location per room layout drawing.

NOTE: HAVE A LICENSED PLUMBER AND ELECTRICIAN INSTALL ALL UTILITIES. LOCAL PLUMBING AND ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

Plumbing Specifications

1. Stubs for water, air , and vacuum can be placed anywhere within the bold line perimeters Recommended locations have been indicated.
2. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
3. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
4. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min. / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

Model DM-RTL003 shown

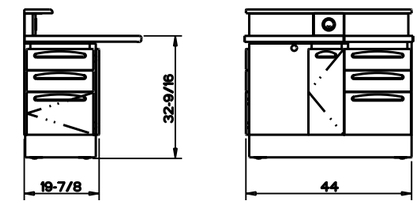

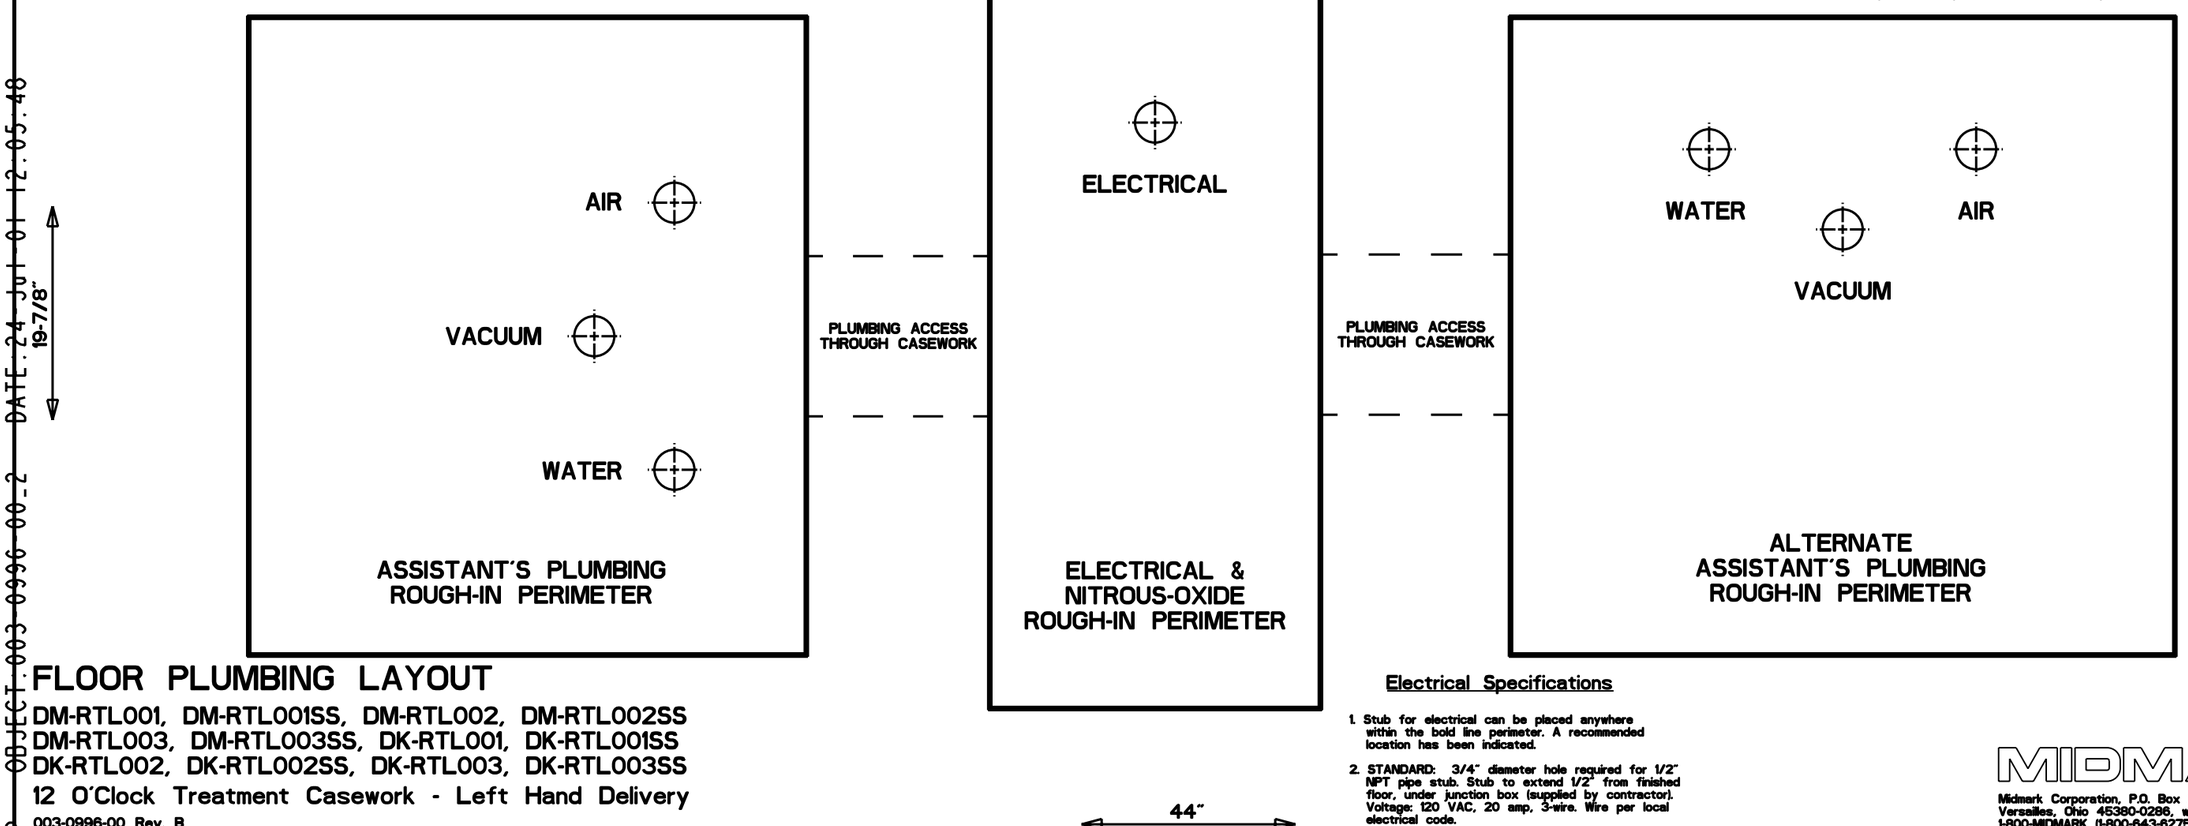

FLOOR PLUMBING LAYOUT

DM-RTL001, DM-RTL001SS, DM-RTL002, DM-RTL002SS
DM-RTL003, DM-RTL003SS, DK-RTL001, DK-RTL001SS
DK-RTL002, DK-RTL002SS, DK-RTL003, DK-RTL003SS
12 O'Clock Treatment Casework - Left Hand Delivery

003-0996-00 Rev. B

Electrical Specifications

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1/2" from finished floor, under junction box (supplied by contractor). Voltage: 120 VAC, 20 amp, 3-wire. Wire per local electrical code.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0996-00_2 DATE:24 Jul 01 12:05:40

Go To Table Contents

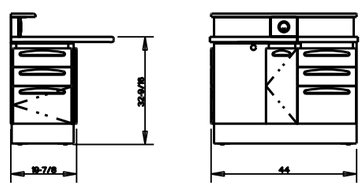

Model DM-RTL003 shown

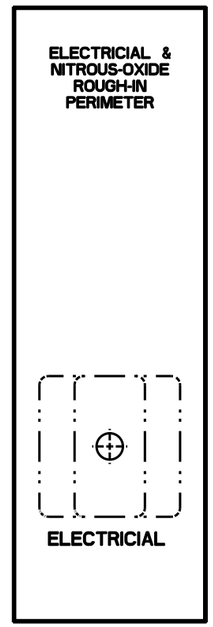

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

44"

32-9/16"

32.562

WALL PLUMBING LAYOUT

DM-RTL001, DM-RTL001SS, DM-RTL002, DM-RTL002SS
DM-RTL003, DM-RTL003SS, DK-RTL001, DK-RTL001SS
DK-RTL002, DK-RTL002SS, DK-RTL003, DK-RTL003SS
12 O'Clock Treatment Casework
Left Hand Delivery

003-0997-00 Rev. B

(B)

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

(B)

44.000

NAME: DLANGENKAMP OBJECT: 003-0997-00_I DATE: 24-Jul-01 13:35:27

(B)

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-RTL001SS, DK-RTL002SS, DK-RTL003SS, DM-RTL001, DM-RTL001SS, DM-RTL002, DM-RTL002SS, DM-RTL003, DM-RTL003SS, "MIDMARK" WAS "BRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY DATE

SHEET 1 OF 2

PREPARED BY S.STRAIT DATE 18-Sep-98

PART NAME TEMPLATE, WALL, DM-RTLOOX

APPROVED BY PROJECT ENGINEER DATE

PART NUMBER 003-0997-00 REV C

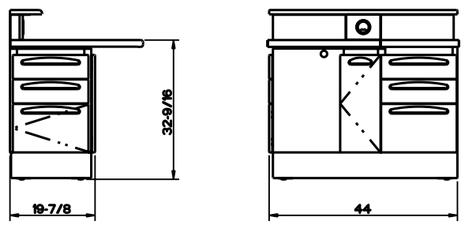

Model DM-RTL003 shown

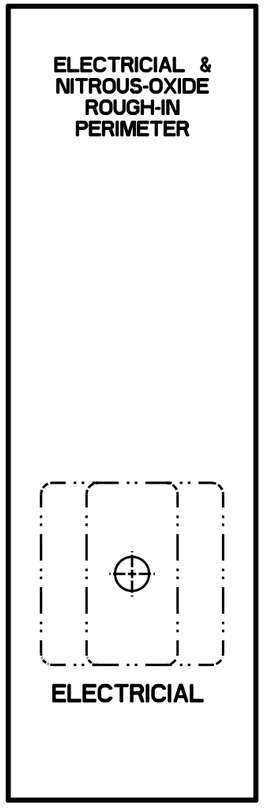

44"

32-9/16"

General Notes

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing

Electricial Specifications

NOTE: HAVE A LICENSED ELECTRICIAN INSTALL ALL ELECTRICAL COMPONENTS. LOCAL ELECTRICAL CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Stub for electrical can be placed anywhere within the bold line perimeter. A recommended location has been indicated.
2. STANDARD: Outline shown for a standard 2x4 and a 4x4 wall junction box (supplied by contractor). Wire per local electrical codes.

WALL PLUMBING LAYOUT

DM-RTL001, DM-RTL001SS, DM-RTL002, DM-RTL002SS
DM-RTL003, DM-RTL003SS, DK-RTL001, DK-RTL001SS
DK-RTL002, DK-RTL002SS, DK-RTL003, DK-RTL003SS

12 O'Clock Treatment Casework
Left Hand Delivery

003-0997-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME:DLANGENKAMP OBJECT:003-0997-00_2 DATE:24-Jul-01 13:35:28

Go To Table Contents

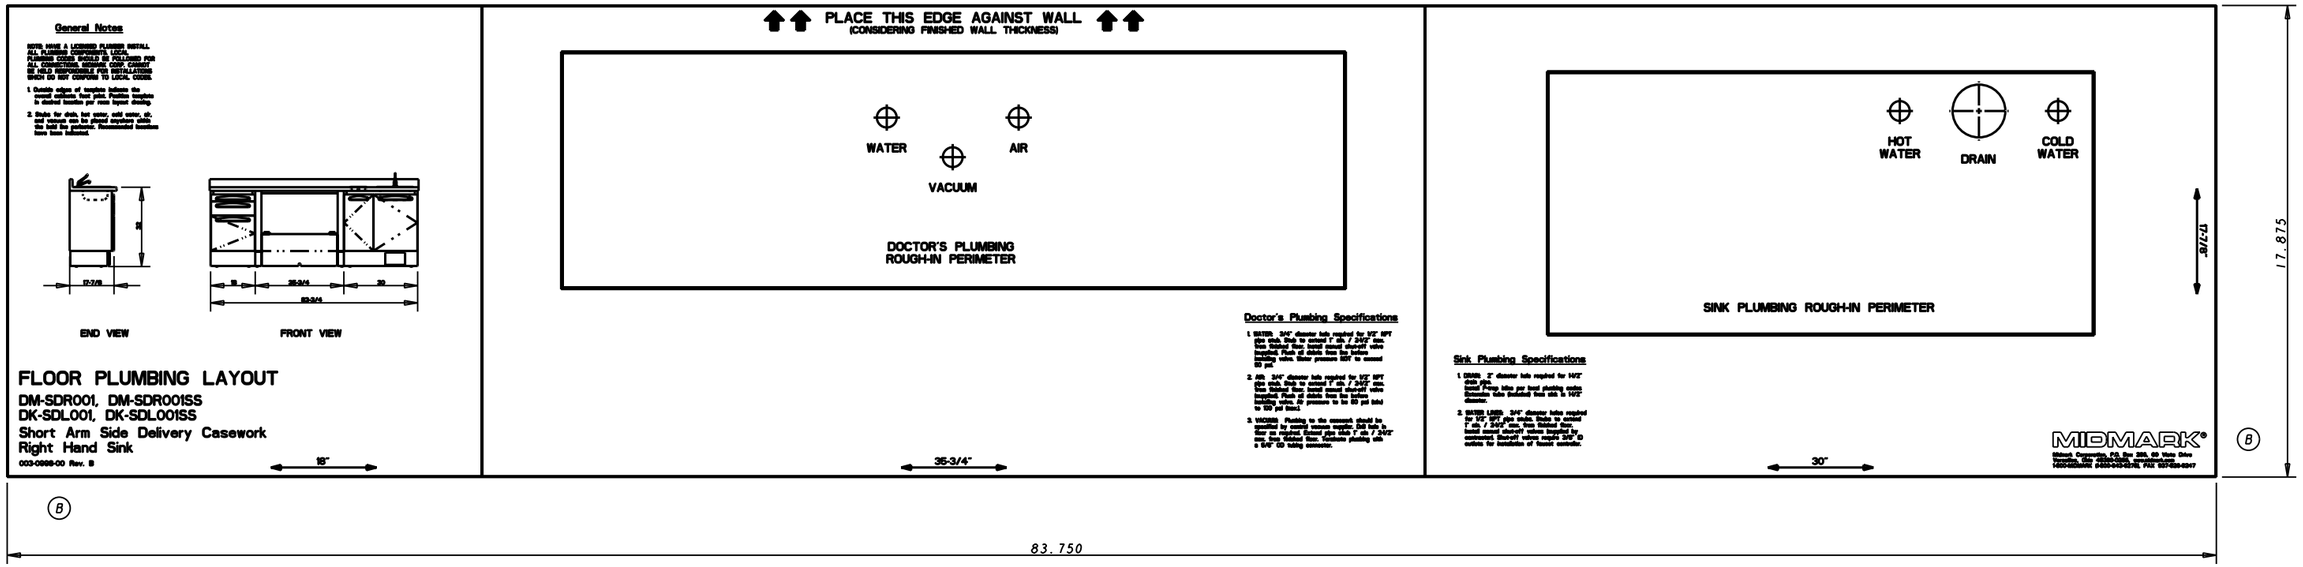

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS DM-SDL001SS, DM-SDR001, AND DM-SDR001SS. "MIDMARK" WAS "KNIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY | DATE | SHEET 1 OF 2
PREPARED BY S.STRAIT | DATE 18-Sep-98 | PART NAME TEMPLATE, FLOOR, DM-SDR001
APPROVED BY PROJECT ENGINEER | DATE | PART NUMBER 003-0998-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-0998-00_1 DATE: 24-Jul-01 12:10:17

Go To Table Contents

General Notes

- NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.
- Outside edges of templates indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
- 2"Holes for drain, hot water, cold water, air, and vacuum can be placed anywhere within the total foot footprint. Recommended locations have been indicated.

END VIEW FRONT VIEW

FLOOR PLUMBING LAYOUT

DM-SDR001, DM-SDR001SS
DK-SDL001, DK-SDL001SS
Short Arm Side Delivery Casework
Right Hand Sink

083-0998-00 Rev. B

18"

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

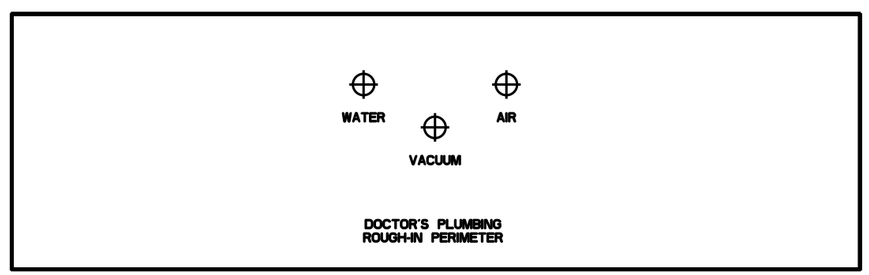

35-3/4"

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" ch. / 3/4" min. from finished floor. Install sweat shut-off valve supplied. Flush of debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" ch. / 3/4" min. from finished floor. Install sweat shut-off valve supplied. Flush of debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the cassework should be specified by medical vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" ch. / 3/4" min. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

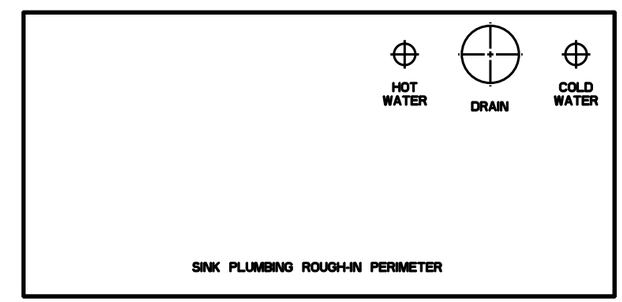

17-7/8"

30"

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1-1/2" drain pipe.
   Install P-trap (also per local plumbing codes). Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" ch. / 3/4" min. from finished floor.
   Install sweat shut-off valves (supplied by customer). Supplied valves accept 3/8" O. outlets for installation of flexible connector.

MIDMARK®

Midmark Corporation, P.O. Box 392, 60 Vista Drive
Versailles, Ohio 45380-0392, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

SCALE 0.375

NAME:DLANGENKAMP OBJECT:003-0998 DATE:24-Jul-01 10:12:18

Go To Table Contents

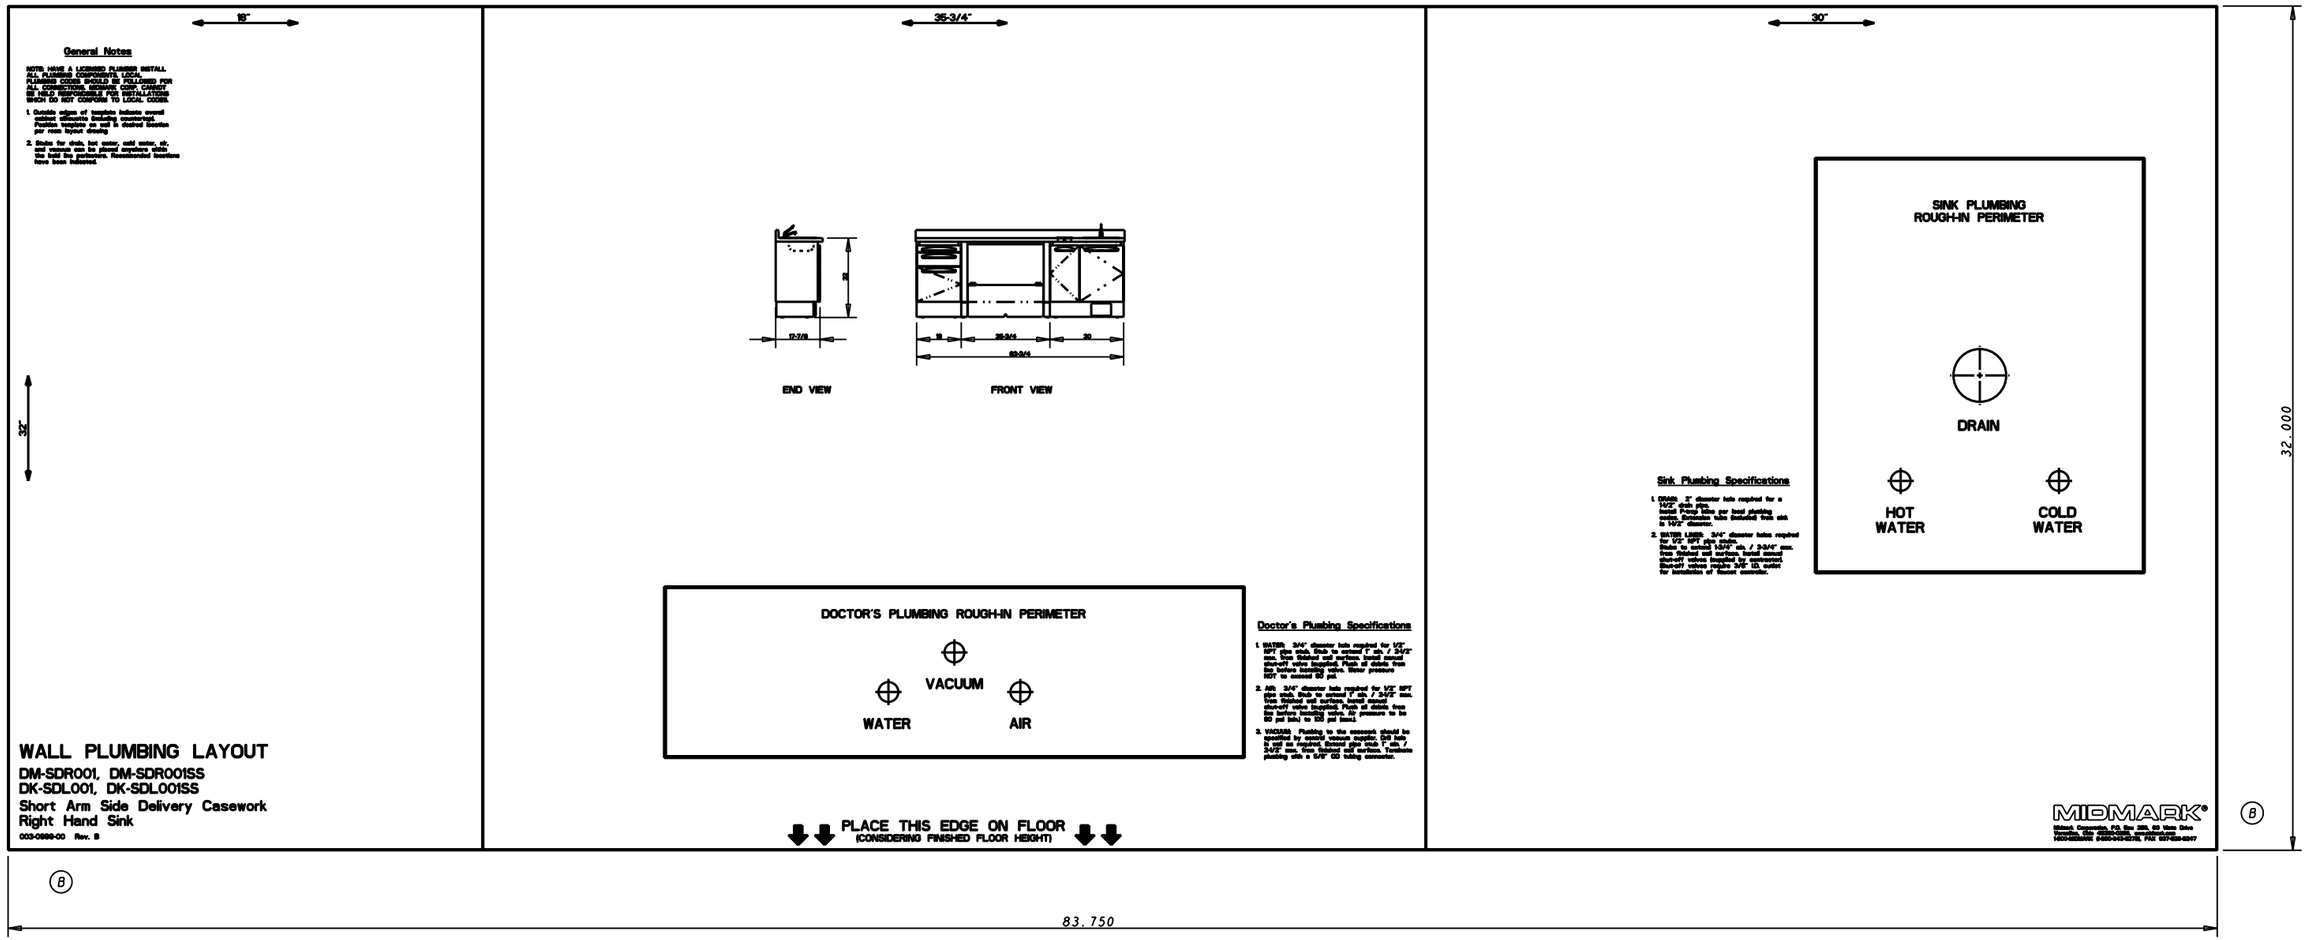

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS LOCAL PLUMBING CODES WOULD BE CONSULTED FOR PLUMBING CODES. WE WOULD BE COMPLETELY RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette including countertop. Position template on wall & desired location per room layout drawing
2. Holes for drain, hot water, cold water, air, and vacuum can be placed anywhere within the box the provided. Recommended locations have been indicated

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 3/8" NPT pipe stub. Stub to extend 1" min / 3-1/2" max. from finished wall surface. Install manual shut-off valve supplied. Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 3/8" NPT pipe stub. Stub to extend 1" min / 3-1/2" max. from finished wall surface. Install manual shut-off valve supplied. Flush all debris from line before installing valve. Air pressure to be 60 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the cuspidor should be specified by specific cuspidor supplier. Drill hole to suit as required. Extend pipe stub 1" min / 3-1/2" max. from finished wall surface. Terminate plumbing with a 3/8" OD tubing connector.

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap tube per local plumbing codes. Extension tube included from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stub. Stub to extend 1" min / 3-1/2" max. from finished wall surface. Install manual shut-off valves supplied by customer. Shut-off valves require 3/8" ID outlet for installation of faucet connector.

WALL PLUMBING LAYOUT

DM-SDR001, DM-SDR001SS
DK-SDL001, DK-SDL001SS
Short Arm Side Delivery Casework
Right Hand Sink

003-0999-00 Rev. B

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDL001SS, DM-SDR001, AND DM-SDR001SS. "MIDMARK" WAS "BRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY | DATE
SHEET 1 OF 2
PREPARED BY S.STRAIT | DATE 18-Sep-98
PART NAME TEMPLATE, WALL, DM-SDR001
APPROVED BY PROJECT ENGINEER | DATE
PART NUMBER 003-0999-00 | REV C

NAME: DLANGENKAMP OBJECT: 003-0999-00_1 DATE: 24-Jul-01 13:38:07

Go To Table Contents

18"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the total line projection. Recommended locations have been indicated.

WALL PLUMBING LAYOUT

DM-SDR001, DM-SDR001SS
DK-SDL001, DK-SDL001SS
Short Arm Side Delivery Casework
Right Hand Sink

000-0999-00 Rev. B

35-3/4"

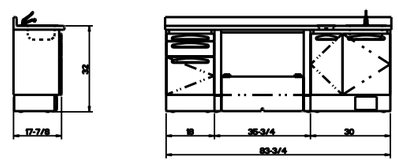

END VIEW

FRONT VIEW

DOCTOR'S PLUMBING ROUGH-IN PERIMETER

VACUUM

WATER

AIR

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 3-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

30"

SINK PLUMBING
ROUGH-IN PERIMETER

DRAIN

HOT
WATER

COLD
WATER

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe.
   Install P-trap tube per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT (3/4" OD) stubs.
   Stubs to extend 1-3/4" min. / 2-3/4" max. from finished wall surface. Install manual shut-off valves (supplied). Flush all debris from line before installing valve. Shut-off valves require 3/8" ID. outlet for installation of faucet connector.

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-552-8275 (1-800-543-8275), FAX 937-526-8247

OBJECT: 03-0999-00_2 DATE: 24-JUL-01 13:38:08

NAME: DLANGENKAMP

Go To Table Contents

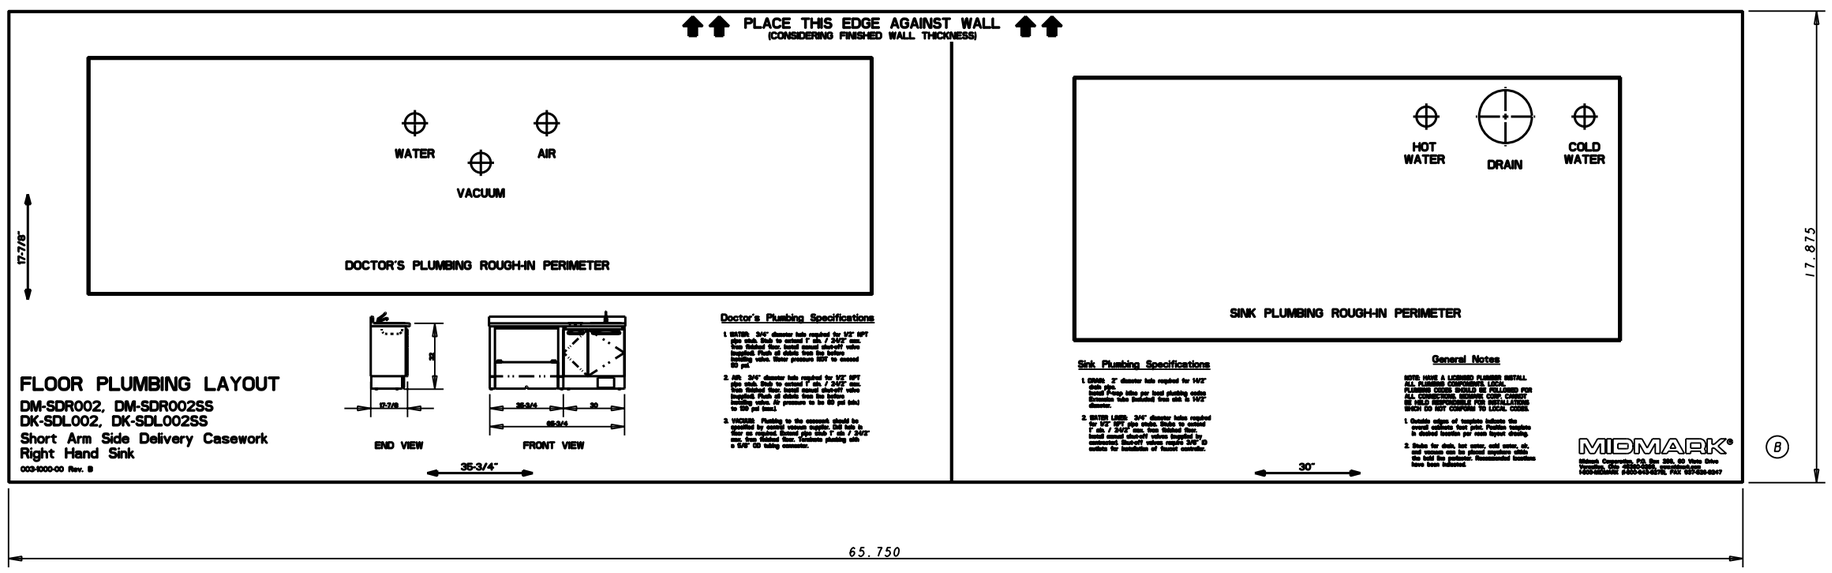

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDL002SS, DM-SDR002, AND DM-SDR002SS. "MIDMARK" WAS "WRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2
ECO NO	DATE	CH BY	CHANGE	REV

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES

ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.375 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 18-Sep-98

PART NAME: TEMPLATE, FLOOR, DM-SDR002

APPROVED BY PROJECT ENGINEER | DATE

PART NUMBER: 003-1000-00 | REV: B

NAME: DLANGENKAMP OBJECT: 003-1000-00_1 DATE: 24-Jul-01 12:15:36

Go To Table Contents

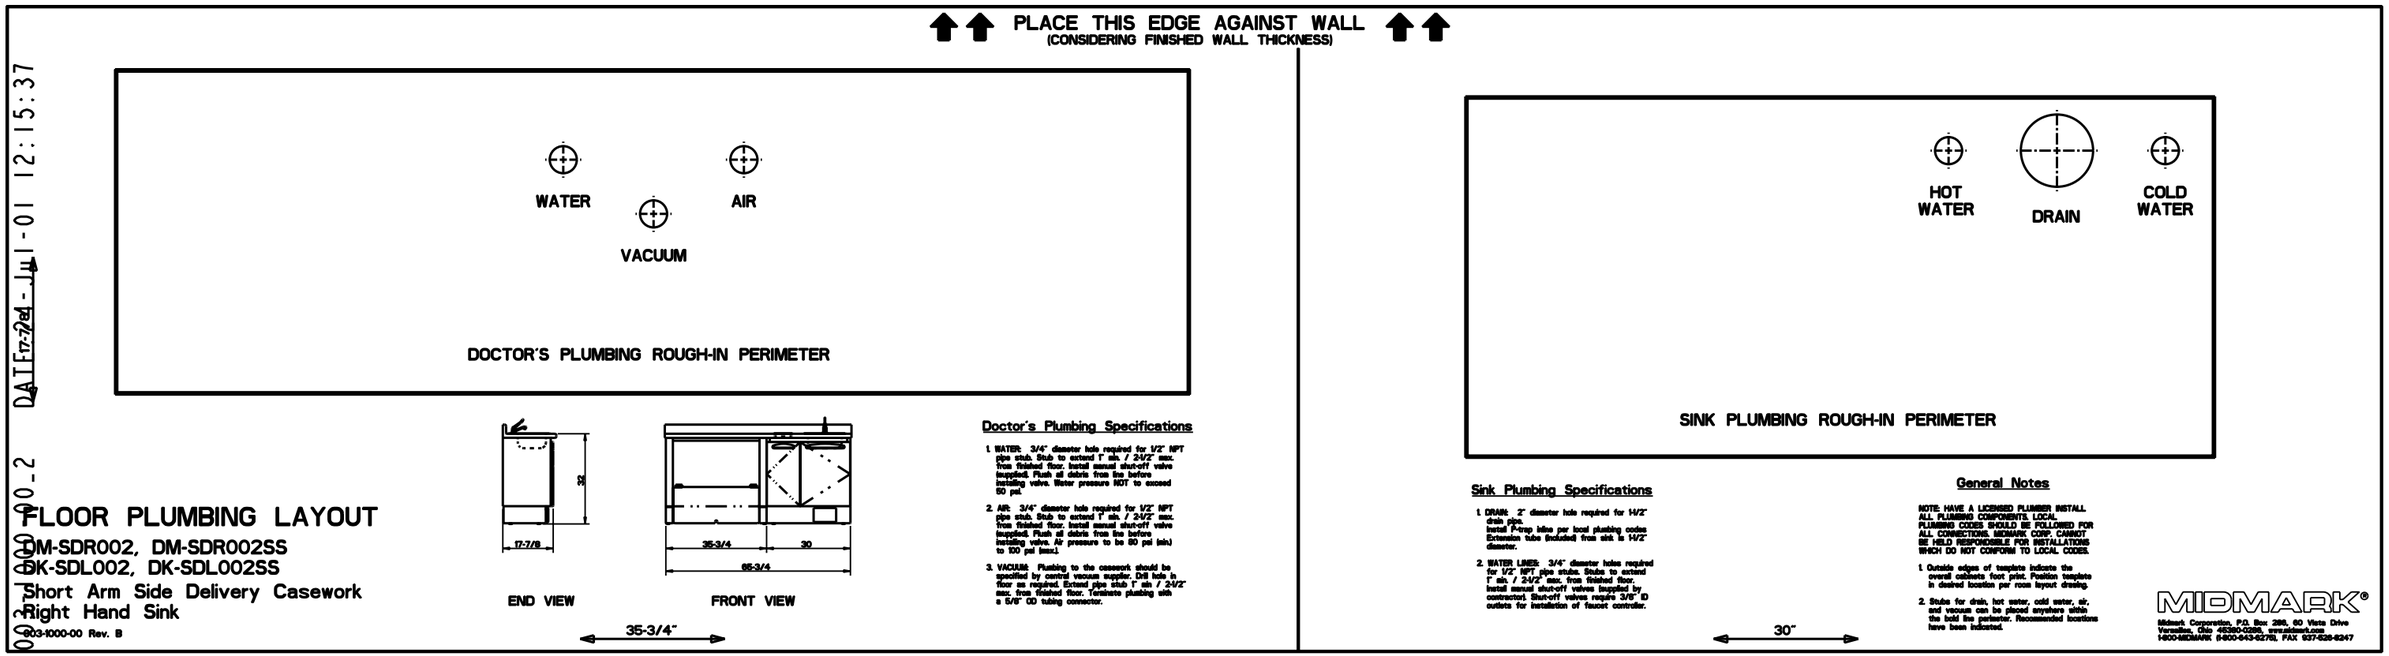

FLOOR PLUMBING LAYOUT

DM-SDR002, DM-SDR002SS
DK-SDL002, DK-SDL002SS
Short Arm Side Delivery Casework
Right Hand Sink

603-1000-00 Rev. B

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1-1/2" drain pipe.
   Install P-trap inline per local plumbing codes
   Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" ID outlets for installation of faucet controller.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

SCALE 0.375

NAME:DLANGENKAMP OBJECT:0_0_0_0_2 DATE:7-24-1_1-01 12:15:37

Go To Table Contents

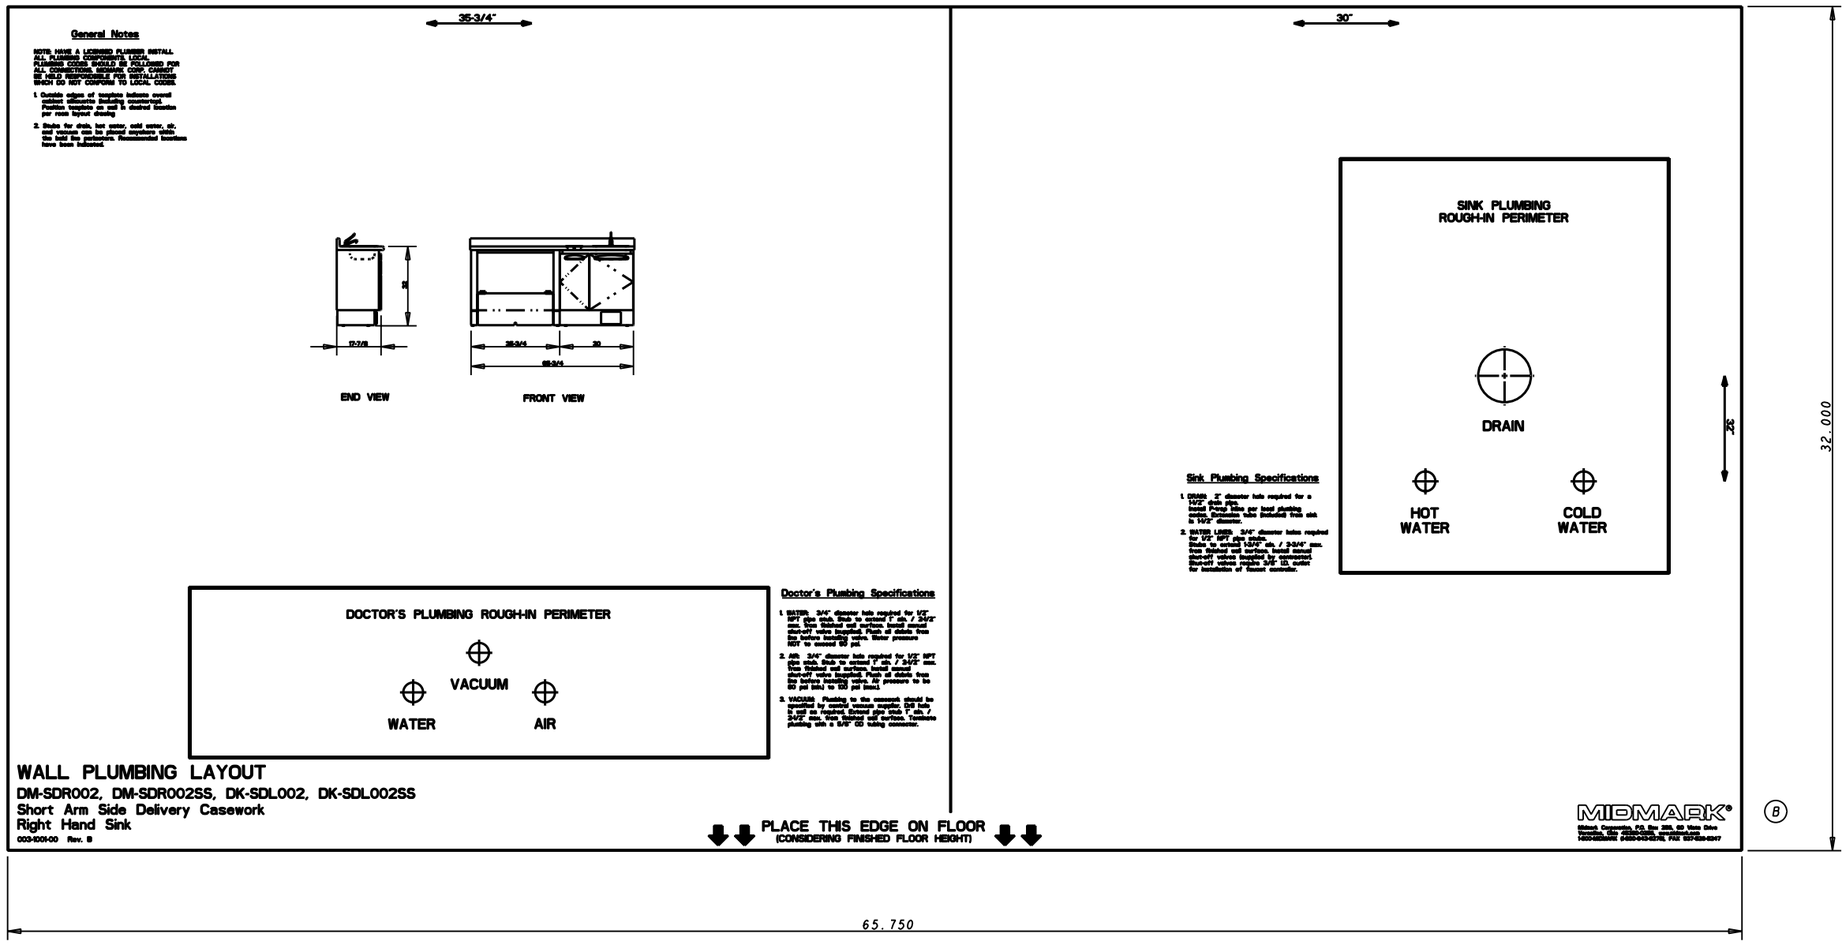

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of toeplate indicate overall cabinet allowance including countertop. Position toeplate on wall to desired location per room layout drawing
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the field the particular Rectangular Envelope have been indicated.

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Drain assembly, trap per local plumbing codes. Drain tube included this sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT (or 3/8" OD) tubing. Water is normally 1/2" nominal, 3-3/4" apart. Water lines should be equipped with shut-off valves (supplied) or permanent. Shut-off valves require 3/8" ID. outlet for installation of faucet connector.

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 2" min. / 3-1/2" max. from finished and surface level overall shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 2" min. / 3-1/2" max. from finished and surface level overall shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the vacuum should be installed by qualified vacuum supplier. Drill hole to install as required. Extend pipe stub 2" min. / 3-1/2" max. from finished and surface. Terminate plumbing with a 3/8" OD tubing connector.

WALL PLUMBING LAYOUT
DM-SDR002, DM-SDR002SS, DK-SDL002, DK-SDL002SS
Short Arm Side Delivery Casework
Right Hand Sink
003-1001-00 Rev. B

(B)

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDL002SS, DM-SDR002, AND DM-SDR002SS. "MIDMARK" WAS "MRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE
SCALE: 0.375
CK BY / DATE
PREPARED BY: S.STRAIT DATE: 21-Sep-98
APPROVED BY PROJECT ENGINEER DATE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SHEET 1 OF 2
PART NAME: TEMPLATE, WALL, DM-SDR002
PART NUMBER: 003-1001-00
REV: C

NAME: DLANGENKAMP OBJECT: 003-1001-00_1 DATE: 24-Jul-01 13:39:50

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

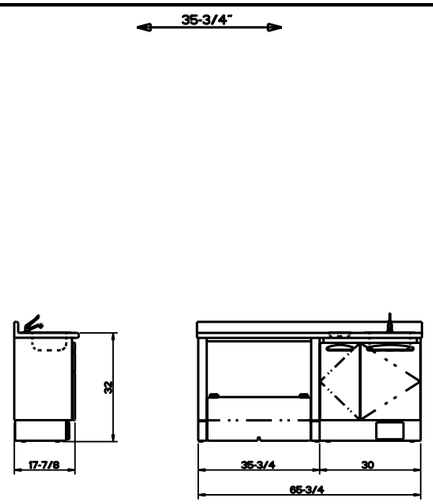

END VIEW

FRONT VIEW

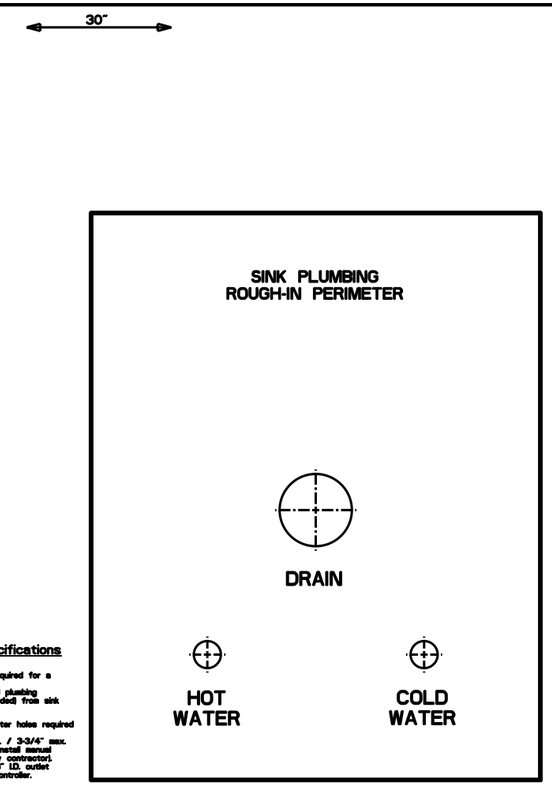

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap tube per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

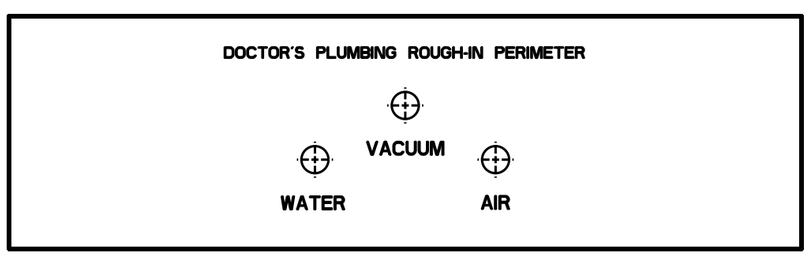

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

WALL PLUMBING LAYOUT

DM-SDR002, DM-SDR002SS, DK-SDL002, DK-SDL002SS
Short Arm Side Delivery Casework
Right Hand Sink
003-1001-00 Rev. B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: 003-1001-00_2 DATE: 24-Jul-01 13:39:51

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.



END VIEW



FRONT VIEW

FLOOR PLUMBING LAYOUT

DM-SDR003, DM-SDR003SS
DK-SDL003, DK-SDL003SS
Short Arm Side Delivery Casework
Left Hand Storage

003-1002-00 Rev. B

B

18"

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

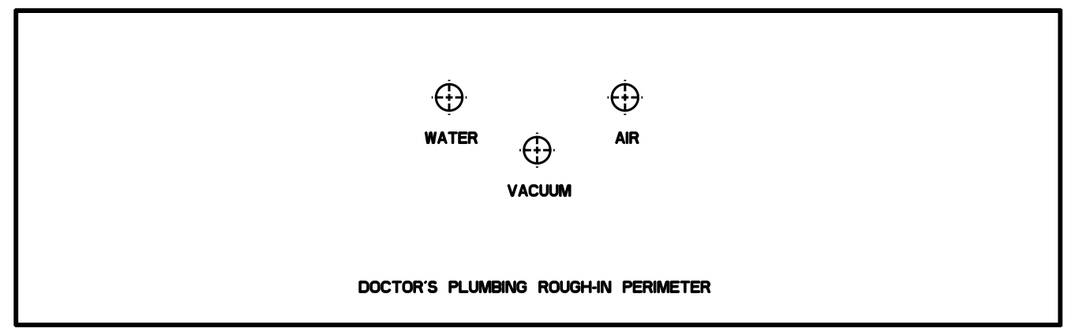

17.875"

17.875

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-6247

B

35-3/4"

53.750

B

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDL003SS, DM-SDR003, AND DM-SDR003SS. "MIDMARK" WAS "MOVED by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2
ECO NO	DATE	CH BY	CHANGE	REV

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 21-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, FLOOR, DM-SDR003

PART NUMBER: 003-1002-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-1002-00_I DATE: 24-Jul-01 12:23:45

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.



END VIEW



FRONT VIEW

FLOOR PLUMBING LAYOUT

DM-SDR003, DM-SDR003SS
DK-SDL003, DK-SDL003SS
Short Arm Side Delivery Casework
Left Hand Storage

003-1002-00 Rev. B

18"

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

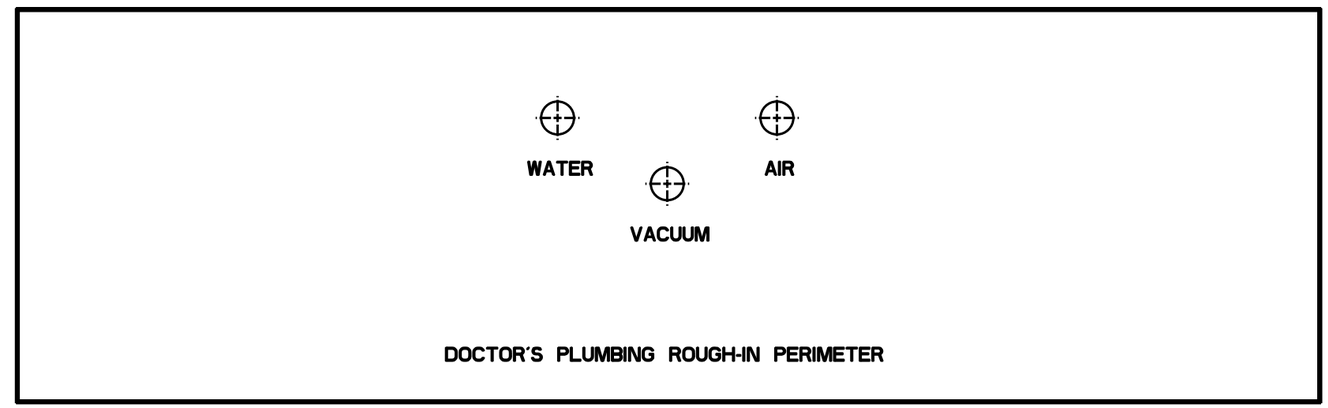

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

35-3/4"

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

OBJECT:003_1002_00_2 DATE:24 Jul 01 12:23:46
NAME:DLANGENKAMP
SCALE 0.500

Go To Table Contents

18"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

35-3/4"

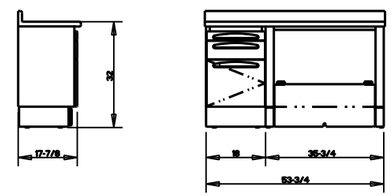

END VIEW

FRONT VIEW

32"

32.000

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

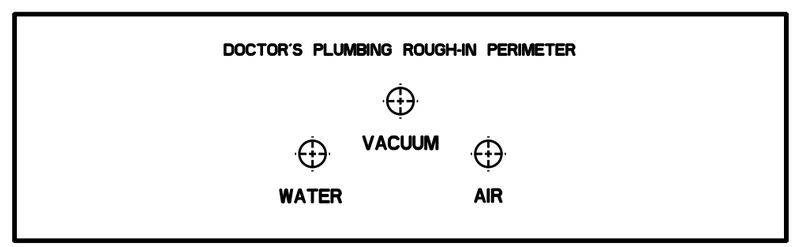

WALL PLUMBING LAYOUT

DM-SDR003, DM-SDR003SS
DK-SDL003, DK-SDL003SS
Short Arm Side Delivery Casework
Left Hand Storage

003-1003-00 Rev. B

B

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

B

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

53.750

B

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M13947	7/03/00	MRH	ADD MODELS DK-SDL003SS, DM-SDR003, AND DM-SDR003SS. "MIDMARK" WAS "BRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE | SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 21-Sep-98 | PART NAME TEMPLATE, WALL, DM-SDR003

APPROVED BY PROJECT ENGINEER | DATE | PART NUMBER 003-1003-00 | REV C

NAME: DLANGENKAMP OBJECT: 003-1003-00_1 DATE: 24-Jul-01 13:41:19

Go To Table Contents

18"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

35-3/4"

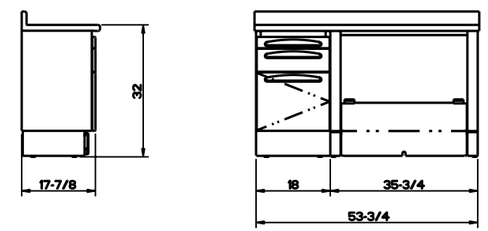

END VIEW

FRONT VIEW

32"

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

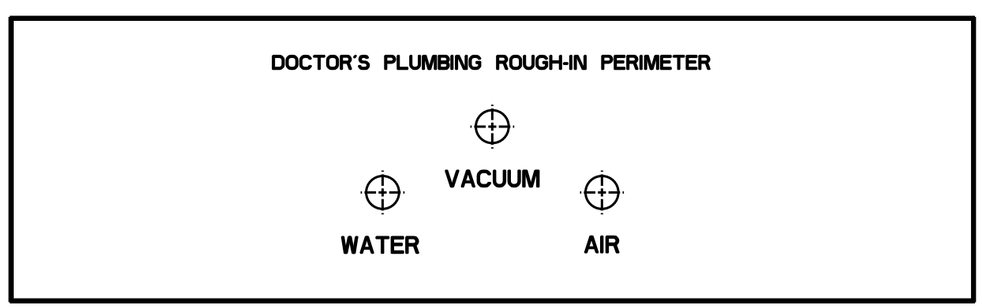

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

WALL PLUMBING LAYOUT

DM-SDR003, DM-SDR003SS
DK-SDL003, DK-SDL003SS
Short Arm Side Delivery Casework
Left Hand Storage

003-1003-00 Rev. B

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: 003-1003-00_2 DATE: 24-Jul-01 13:41:20

Go To Table Contents

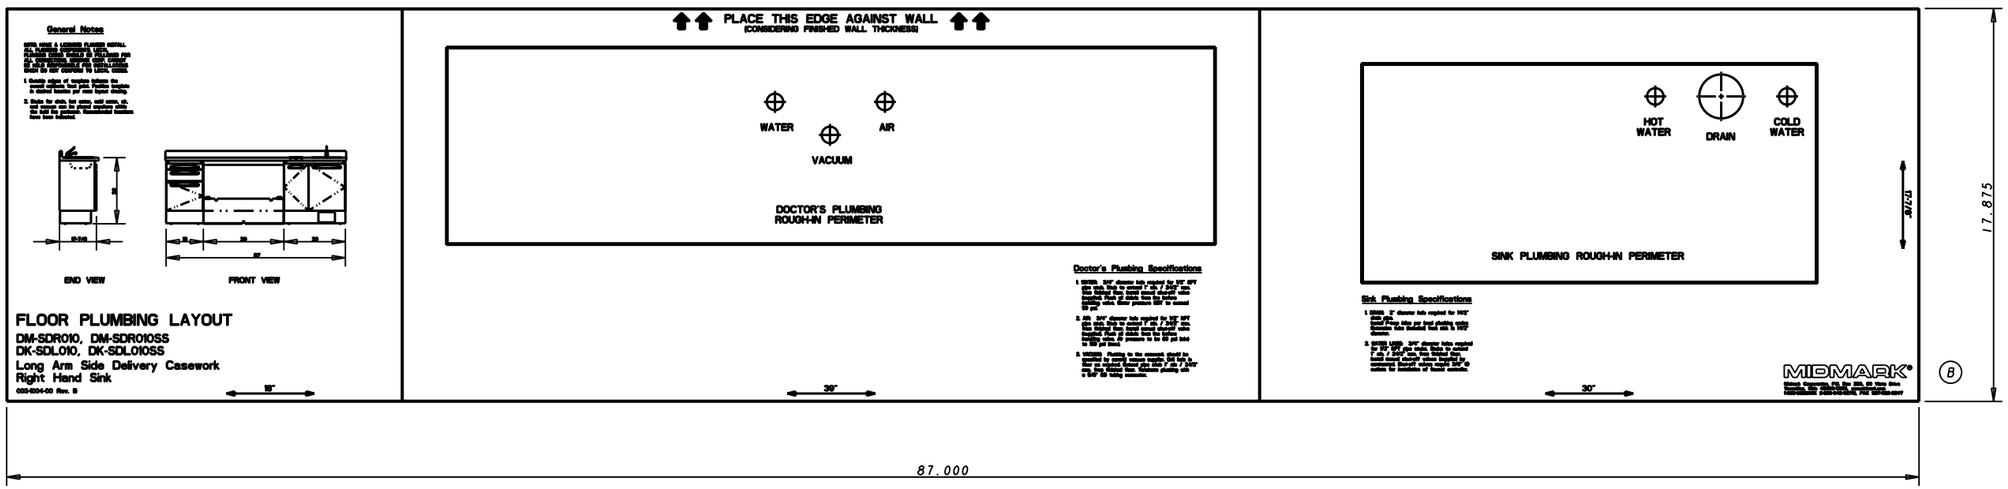

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDL010SS, DM-SDR010, AND DM-SDR010SS. "MIDMARK" WAS "BRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.313 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 21-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, FLOOR, DM-SDR010

PART NUMBER: 003-1004-00 | REV B

NAME: DLANGENKAMP OBJECT: 003-1004-00_1 DATE: 24-Jul-01 12:27:51

Go To Table Contents

General Notes

NOTE:HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS THAT DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinet base sides. Provide template to general installer for room layout detailing.

2. Rights for drain, hot water, cold water, air, and vacuum are to general anywhere within the field the gasket. Recommended locations have been indicated.

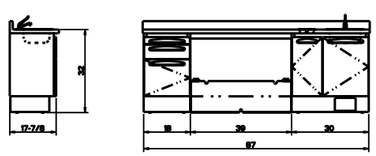

END VIEW

FRONT VIEW

FLOOR PLUMBING LAYOUT

DM-SDR010, DM-SDR010SS
DK-SDL010, DK-SDL010SS
Long Arm Side Delivery Casework
Right Hand Sink

008-994-00 Rev. B

16"

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

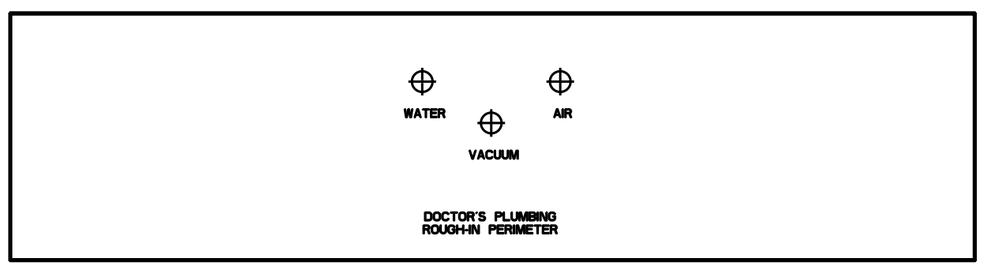

39"

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" ab. / 24½" min. from finished floor. Install manual shutoff valve (supplied). Flush all debris from line before installing valve. Water pressure MUST be manual 50 psi.

2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" ab. / 24½" min. from finished floor. Install manual shutoff valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).

3. VACUUM: Plumbing to the vacuum should be specified by general contractor. Install 3/4" NPT x fiber or equivalent flexible pipe stub 1" ab. / 24½" min. from finished floor. Terminate plumbing with a 3/4" OD tubing connector.

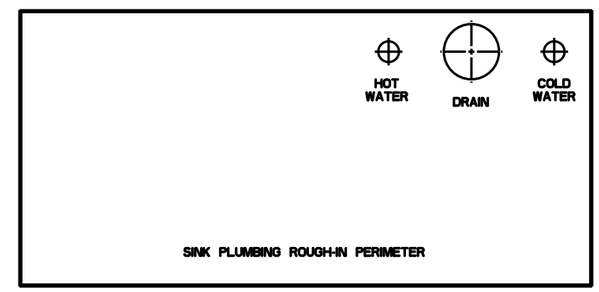

17-7/8"

30"

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1½" chase pipe.
Install P-trap tube per local plumbing codes. Extension tube installed from sink to 1½" diameter.

2. WATER LINES: 3/4" diameter holes required for 3/4" NPT pipe nipple. Stubs to extend 1" ab. / 24½" min. from finished floor. Install manual shutoff valves (supplied) by customer. Shutoff valves require 3/4" ID outlets for installation of faucet controller.

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 West Ohio
Versailles, Ohio 45380-0286, USA
1800-MIDMARK (800-643-6275), FAX 937-526-8247

SCALE 0.313

DATE:24-Jul-01 OBJECT:003-100-52 NAME:DLANGENKAMP

Go To Table Contents

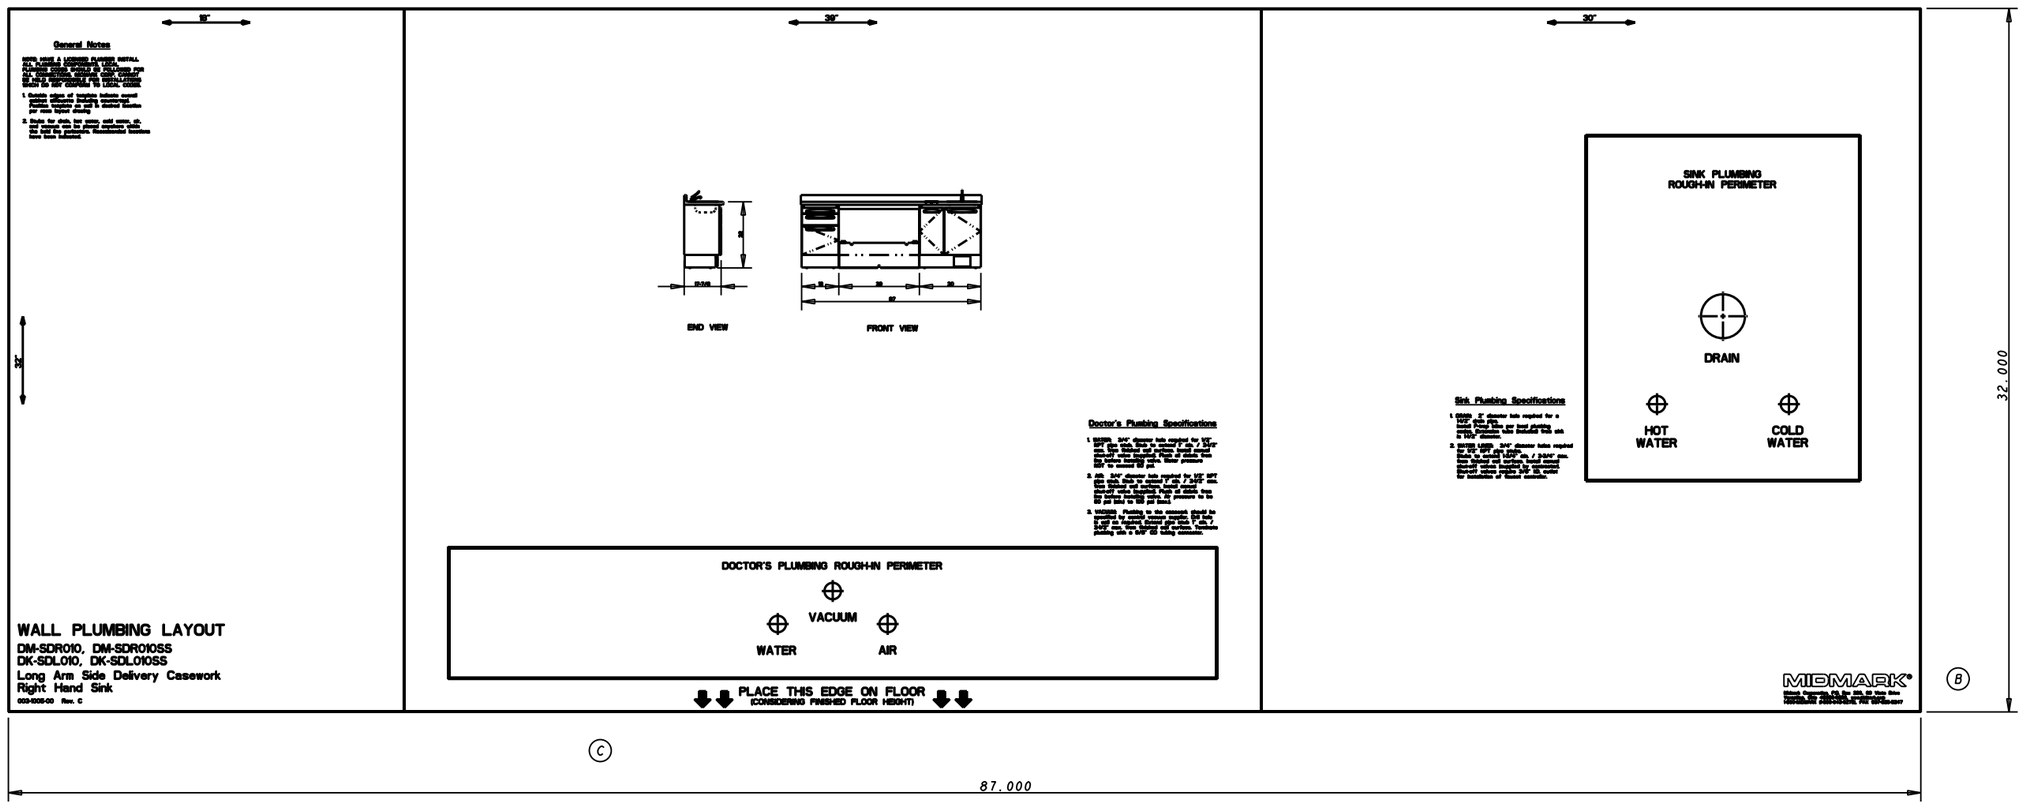

NAME: DLANGENKAMP OBJECT: 003-1005-00_I DATE: 24-Jul-01 13:43:57

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M14208	10/10/00	SLS	REVISE HEIGHT OF DOCTOR'S PLUMBING ROUGH-IN PERIMETER	C
M13947	7/03/00	MRH	ADD MODELS DK-SDL010SS, DM-SDR010, AND DM-SDR010SS. "MIDMARK" WAS "BRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES

ANGULAR +/-	
FRACTIONAL +/-	
DECIMAL.XX +/-	.06
DECIMAL.XXX +/-	.031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE: 0.313 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 21-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, WALL, DM-SDR010

PART NUMBER: 003-1005-00 | REV: C

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette including countertop. Position template on wall in desired location per room layout drawing
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line pattern. Recommended locations have been indicated.

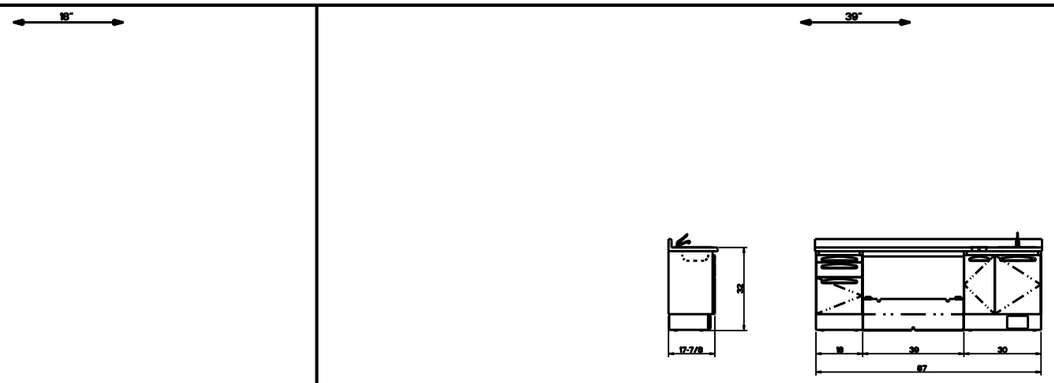

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 3-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the vacuum should be specified by special vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 3-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

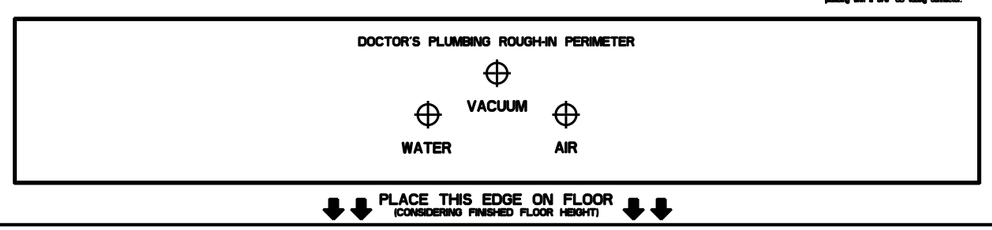

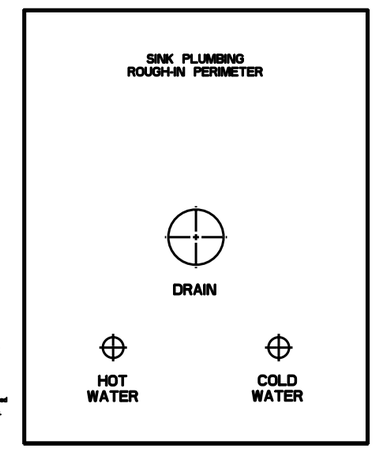

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe.
   Install P-trap below and hand plumbing center. Extension tube included from sink to 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs.
   Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" ID. outlet for installation of faucet connector.

MIDMARK®

Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

WALL PLUMBING LAYOUT

DM-SDR010, DM-SDR010SS
DK-SDL010, DK-SDL010SS
Long Arm Side Delivery Casework
Right Hand Sink

ob_sink-00 Rev. C

OBJ: 1005-00_2 DATE: 24-Jul-01 13:43:58

NAME: DLANGENKAMP

Go To Table Contents

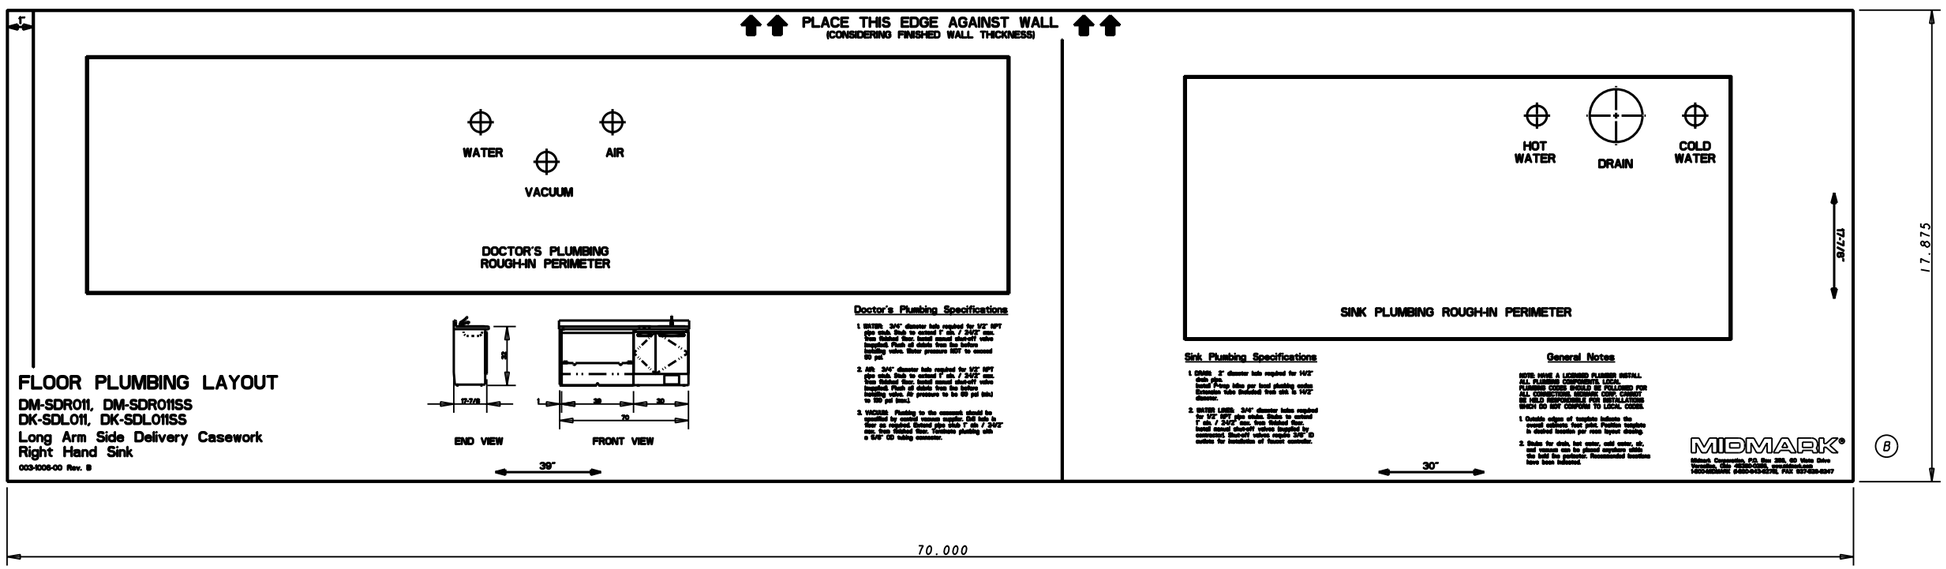

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" OD / 3/4" min. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.

2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" OD / 3/4" min. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).

3. VACUUM: Plumbing to the cassework should be done with 1/2" copper tubing. Install 3/4" hole in floor as required. Extend pipe 1/4" OD / 3/4" min. from finished floor. Terminate plumbing with a 3/4" OD tubing connector.

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 14/0" drain pipe.
Install P-trap tube per local plumbing code. Alternate tube installed from sink is 14/0" diameter.

2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" OD / 3/4" min. from finished floor. Install manual shut-off valves (supplied) for convenience. Install valves angled 3/4" O. centers for installation of faucet connector.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinet floor plan. Position template in desired location per room layout drawing.

2. Holes for drain, hot water, cold water, air, and vacuum are for planned equipment. After the field has positioned, Recommended locations have been indicated.

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDL011SS, DM-SDR011, AND DM-SDR011SS. "MIDMARK" WAS "KNIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION
MATERIAL SPEC: SEE NOTE			MIDMARK CORPORATION, VERSAILLES, OHIO 45380
SCALE 0.375	CK BY DATE		SHEET 1 OF 2
PREPARED BY S.STRAIT	DATE 21-Sep-98	PART NAME	TEMPLATE, FLOOR, DM-SDR011
APPROVED BY PROJECT ENGINEER	DATE	PART NUMBER	003-1006-00 REV B

NAME: DLANGENKAMP OBJECT: 003-1006-00_1 DATE: 24-Jul-01 12:30:38

Go To Table Contents

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

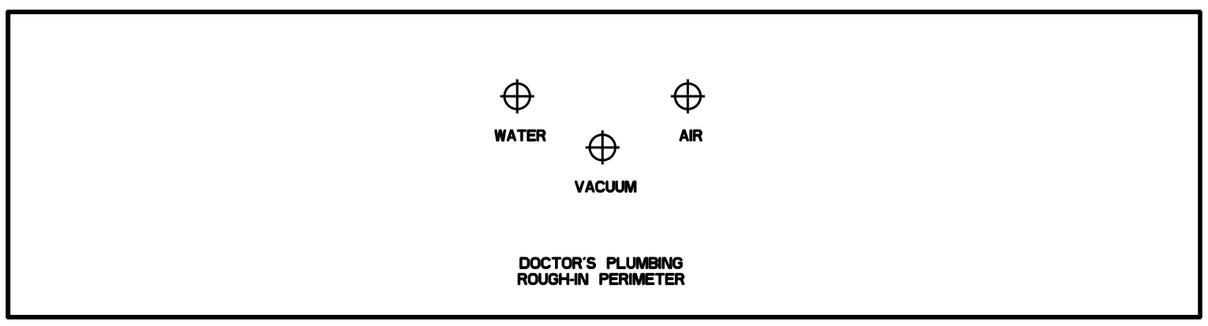

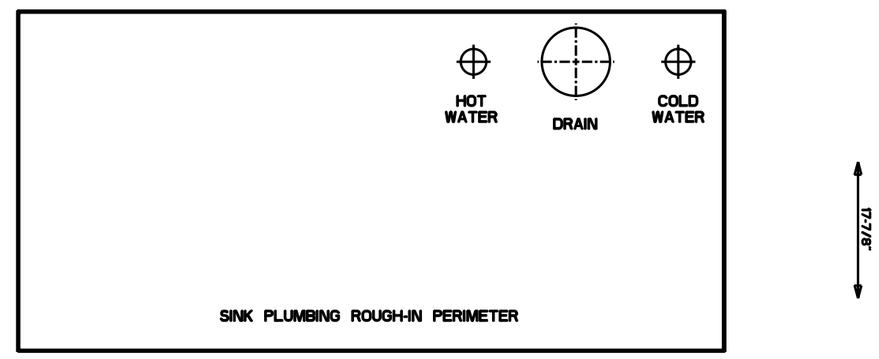



Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for 1-1/2" drain pipe.
   Install P-trap inline per local plumbing codes (not P-trap inline per local plumbing codes Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1" min / 2-1/2" max. from finished floor. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" ID outlets for installation of faucet controller.

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

FLOOR PLUMBING LAYOUT

DM-SDR011, DM-SDR011SS
DK-SDL011, DK-SDL011SS
Long Arm Side Delivery Casework
Right Hand Sink

003-1006-00 Rev. B

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

SCALE 0.375

NAME:DLANGENKAMP OBJECT:003-1006-02 DATE:24 Jul 01 12:30:39

Go To Table Contents

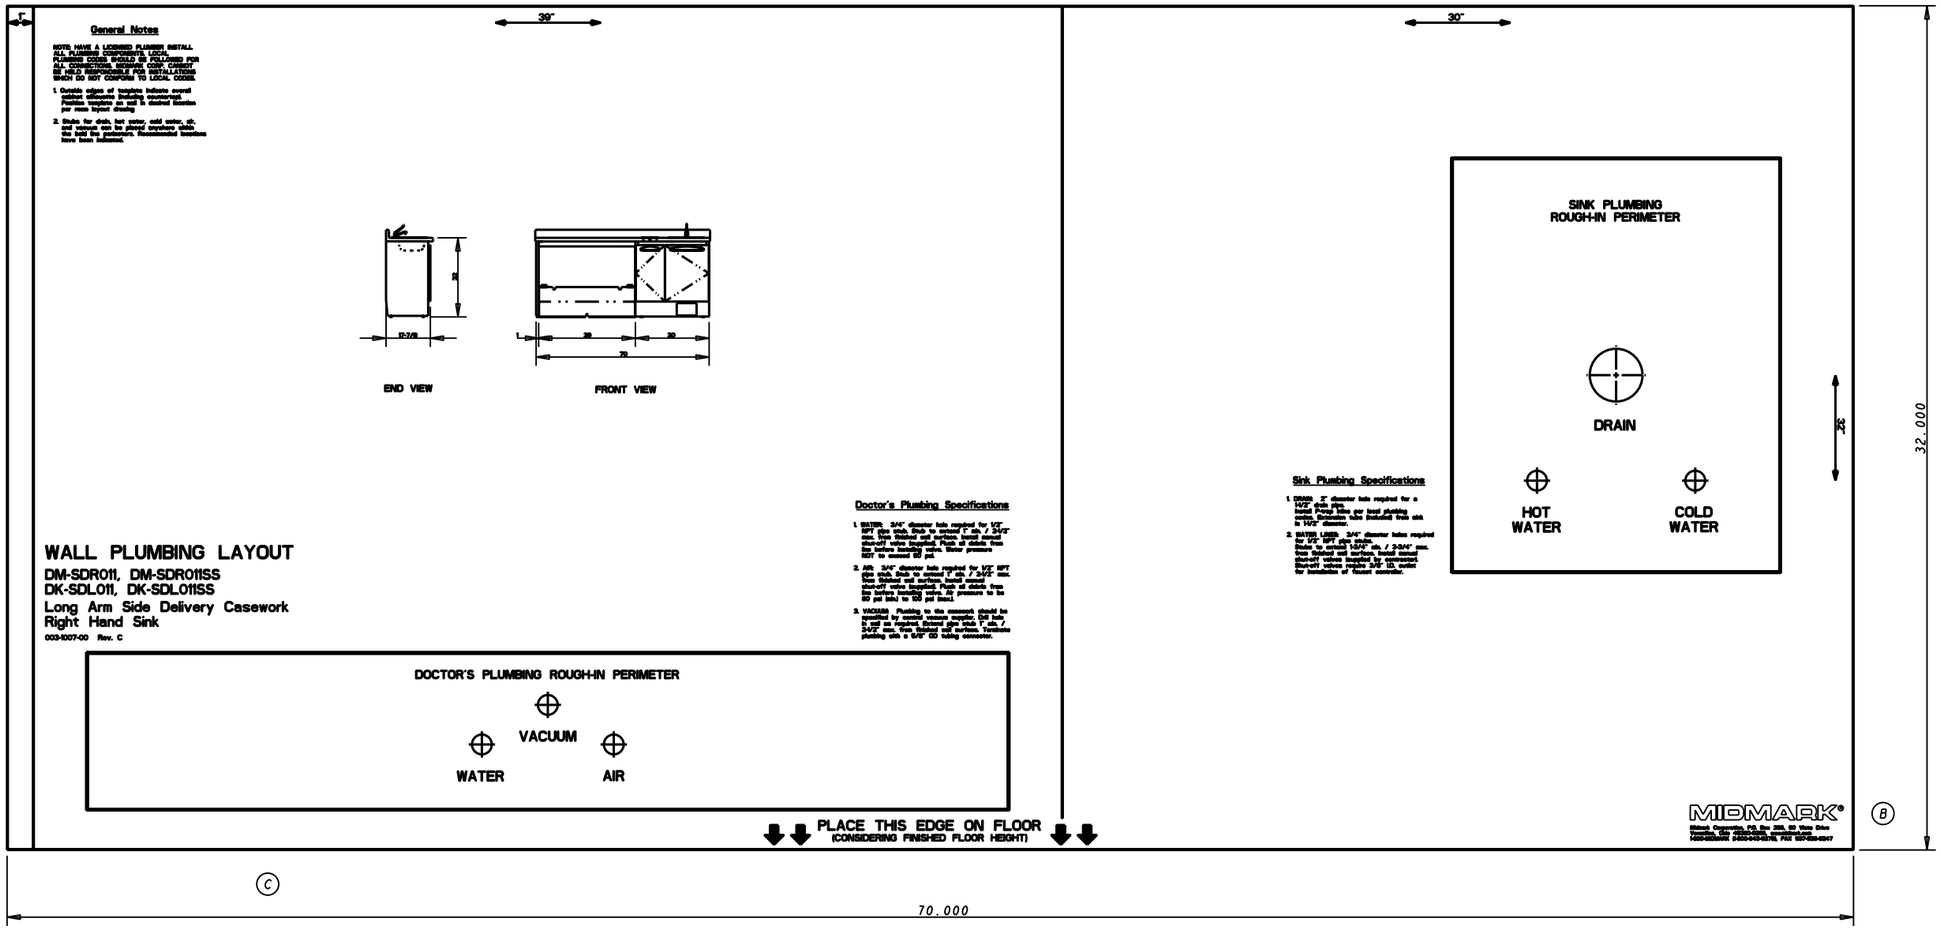

NOTES:

1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M14208	10/10/00	SLS	REVISE HEIGHT OF DOCTOR'S PLUMBING ROUGH-IN PERIMETER	C
M13947	7/03/00	MRH	ADD MODELS DK-SDL011SS, DM-SDR011, AND DM-SDR011SS. "MIDMARK" WAS "BRIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES

ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031

COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE: 0.375 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY: S.STRAIT | DATE: 21-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, WALL, DM-SDR011

PART NUMBER: 003-1007-00 | REV: C

NAME: DLANGENKAMP OBJECT: 003-1007-00_1 DATE: 24-Jul-01 13:46:38

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for drain, hot water, cold water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

39"

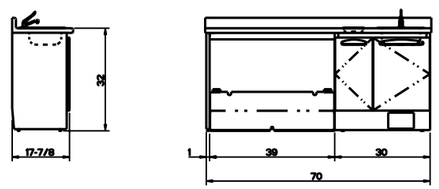

END VIEW

FRONT VIEW

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 60 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 60 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

WALL PLUMBING LAYOUT

DM-SDR011, DM-SDR011SS
DK-SDL011, DK-SDL011SS
Long Arm Side Delivery Casework
Right Hand Sink

003-1007-00 Rev. C

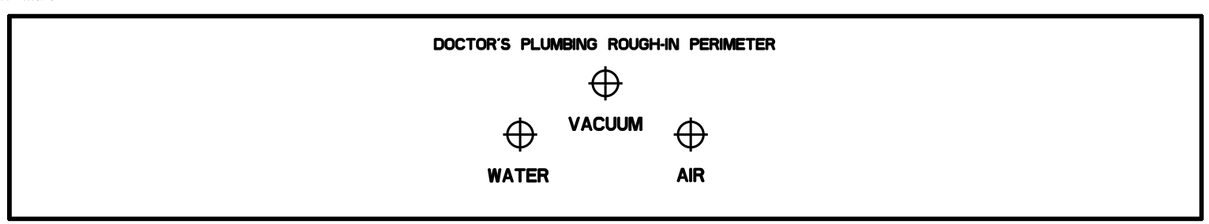

PLACE THIS EDGE ON FLOOR
(CONSIDERING FINISHED FLOOR HEIGHT)

30"

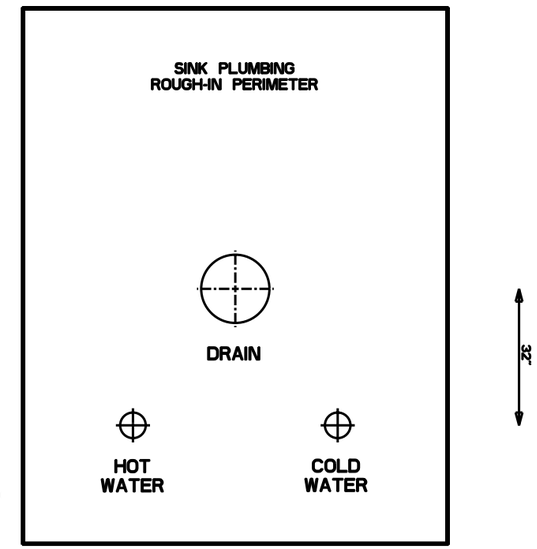

Sink Plumbing Specifications

1. DRAIN: 2" diameter hole required for a 1-1/2" drain pipe. Install P-trap tube per local plumbing codes. Extension tube (included) from sink is 1-1/2" diameter.
2. WATER LINES: 3/4" diameter holes required for 1/2" NPT pipe stubs. Stubs to extend 1-3/4" min. / 3-3/4" max. from finished wall surface. Install manual shut-off valves (supplied by contractor). Shut-off valves require 3/8" I.D. outlet for installation of faucet controller.

MIDMARK®
Midmark Corporation, P.O. Box 392, 60 Vista Drive
Versailles, Ohio 45380-0392, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

NAME: DLANGENKAMP OBJECT: 003-1007-00_2 DATE: 24-Jul-01 13:46:39

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

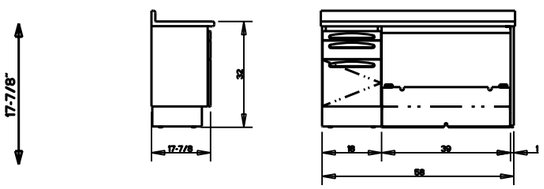

END VIEW FRONT VIEW

FLOOR PLUMBING LAYOUT

DM-SDR012, DM-SDR012SS
DK-SDL012, DK-SDL012SS
Long Arm Side Delivery Casework
Left Hand Storage

003-1008-00 Rev. B

18"

PLACE THIS EDGE AGAINST WALL
(CONSIDERING FINISHED WALL THICKNESS)

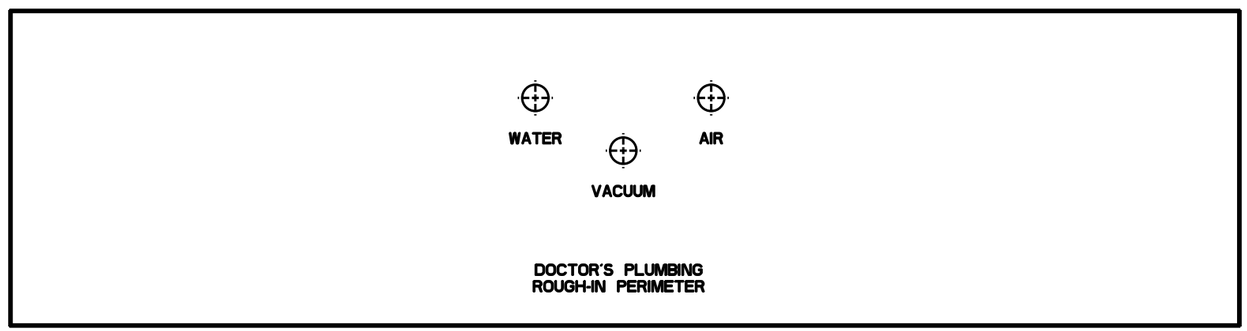

39"

1"

17.875

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

58.000

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
.	.	.	.	.
.	.	.	.	.
M13947	7/03/00	MRH	ADD MODELS DK-SDL012SS, DM-SDR012, AND DM-SDR012SS. "MIDMARK" WAS "BRIGHT by MIDMARK", REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED,USED,OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE
SCALE: 0.500
PREPARED BY: S.STRAIT DATE: 22-Sep-98
APPROVED BY PROJECT ENGINEER DATE
CK BY DATE

MIDMARK®
MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SHEET 1 OF 2
PART NAME: TEMPLATE, FLOOR, DM-SDR012
PART NUMBER: 003-1008-00
REV: B

NAME: DLANGENKAMP OBJECT: 003-1008-00_1 DATE: 24-Jul-01 12:32:17

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONDSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate the overall cabinets foot print. Position template in desired location per room layout drawing.
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeter. Recommended locations have been indicated.

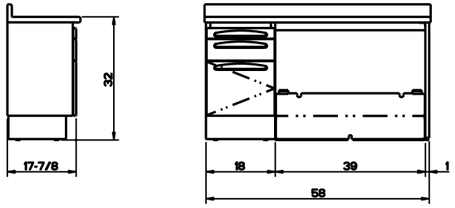

END VIEW

FRONT VIEW

FLOOR PLUMBING LAYOUT

DM-SDR012, DM-SDR012SS
DK-SDL012, DK-SDL012SS
Long Arm Side Delivery Casework
Left Hand Storage

003-1008-00 Rev. B

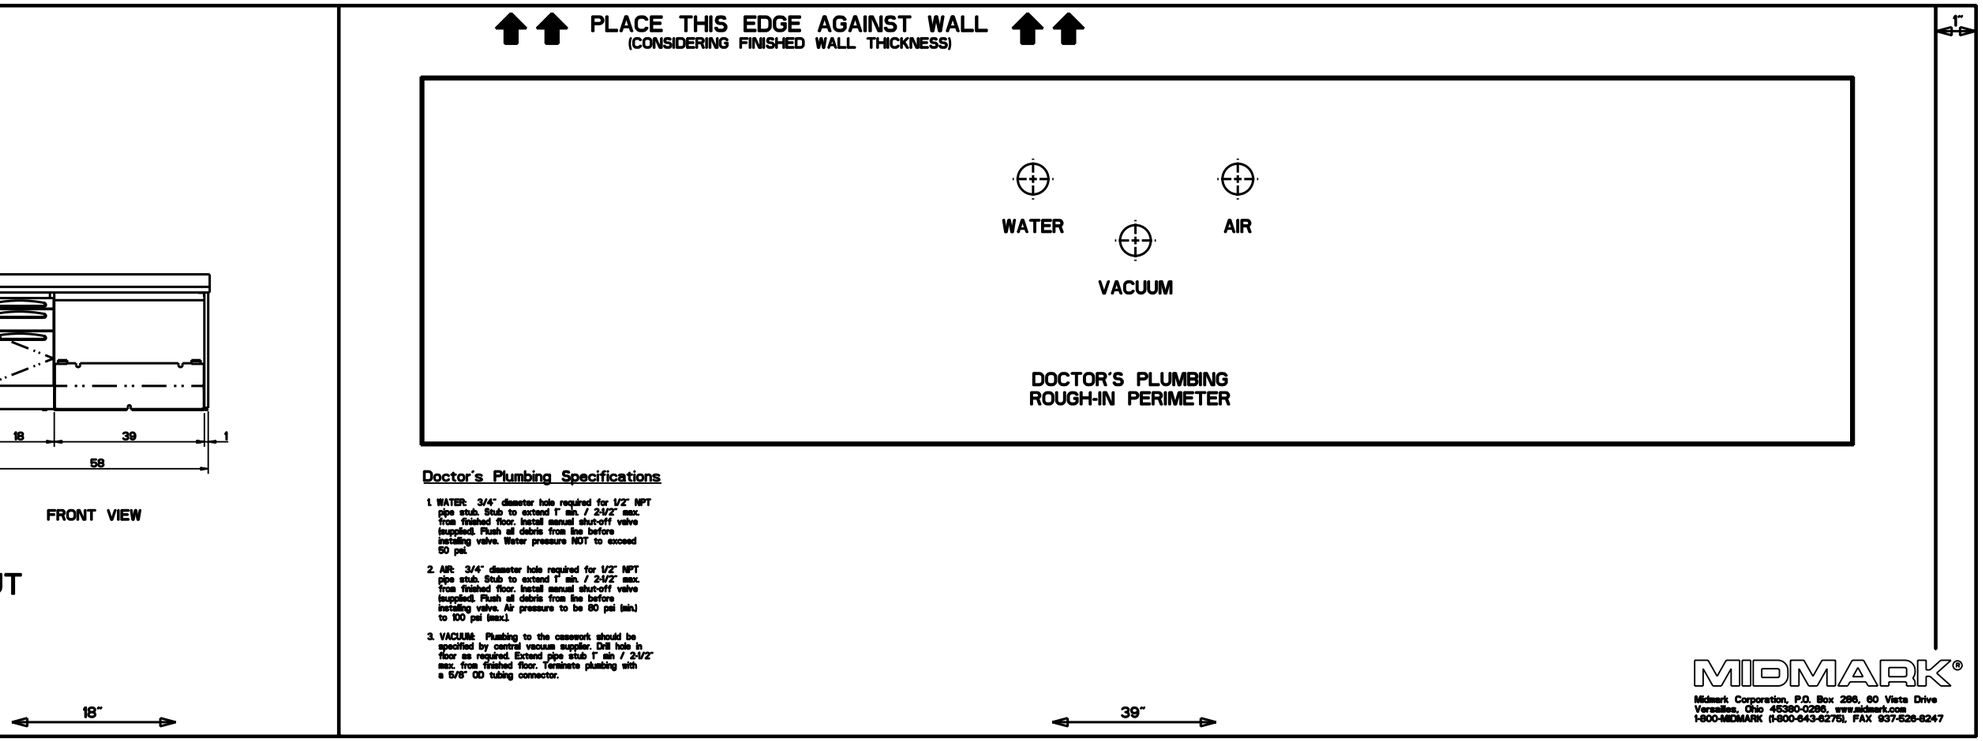

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished floor. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in floor as required. Extend pipe stub 1" min / 2-1/2" max. from finished floor. Terminate plumbing with a 5/8" OD tubing connector.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

SCALE 0.500

NAME:DLANGENKAMP OBJECT:003-1008-00_2 DATE:24-Jul-01 12:32:18

Go To Table Contents

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

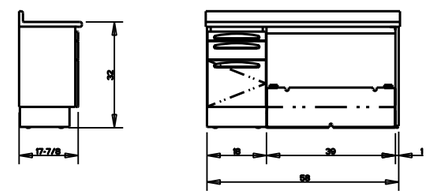

END VIEW

FRONT VIEW

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 80 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min) to 100 psi (max).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

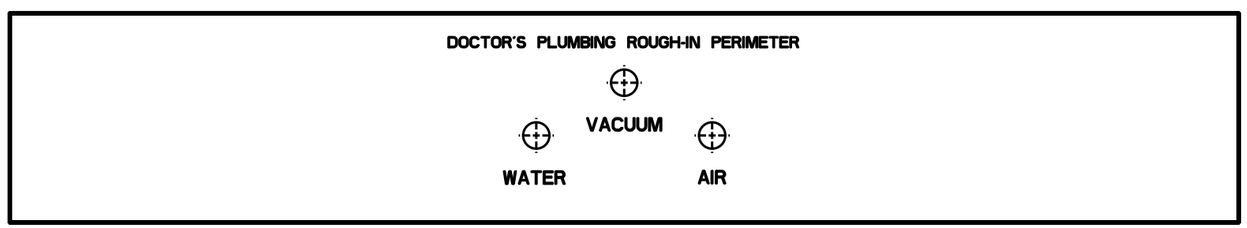

WALL PLUMBING LAYOUT

DM-SDR012, DM-SDR012SS
DK-SDL012, DK-SDL012SS
Long Arm Side Delivery Casework
Left Hand Storage

003-1009-00 Rev. C

18" | 39" | 1" | 32" | 32.000 | 58.000

NOTES:
1. MATERIAL: 20# WHITE OFFSET PAPER.
2. INK COLOR: BLACK.

ECO NO	DATE	CH BY	CHANGE	REV
M14208	10/10/00	SLS	REVISE HEIGHT OF DOCTOR'S PLUMBING ROUGH-IN PERIMETER	C
M13947	7/03/00	MRH	ADD MODELS DK-SDL012SS, DM-SDR012, AND DM-SDR012SS. "MIDMARK" HAS "RAIGHT by MIDMARK". REMOVE NOTE 3	B
M12933	10/30/98	SLS	RELEASED	A2

THIS PRINT AND THE INFORMATION CONTAINED THEREIN ARE PROPERTY OF MIDMARK CORPORATION ARE FURNISHED TO THE HOLDER IN CONFIDENCE AND ARE NOT TO BE REPRODUCED, USED, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIDMARK CORPORATION

UNSPECIFIED GENERAL TOLERANCES
ANGULAR +/- .
FRACTIONAL +/- .
DECIMAL.XX +/- .06
DECIMAL.XXX +/- .031
COMMERCIAL TOLERANCES SHALL APPLY ON BAR, ROD, WIRE, SHEET, ETC.

ITEM	QTY	PART NUMBER	DESCRIPTION

MATERIAL SPEC: SEE NOTE

MIDMARK® MIDMARK CORPORATION, VERSAILLES, OHIO 45380

SCALE 0.500 | CK BY | DATE

SHEET 1 OF 2

PREPARED BY S.STRAIT | DATE 22-Sep-98

APPROVED BY PROJECT ENGINEER | DATE

PART NAME: TEMPLATE, WALL, DM-SDR012

PART NUMBER: 003-1009-00 | REV C

NAME: DLANGENKAMP OBJECT: 003-1009-00_1 DATE: 24-Jul-01 13:48:38

Go To Table Contents

18"

General Notes

NOTE: HAVE A LICENSED PLUMBER INSTALL ALL PLUMBING COMPONENTS. LOCAL PLUMBING CODES SHOULD BE FOLLOWED FOR ALL CONNECTIONS. MIDMARK CORP. CANNOT BE HELD RESPONSIBLE FOR INSTALLATIONS WHICH DO NOT CONFORM TO LOCAL CODES.

1. Outside edges of template indicate overall cabinet silhouette (including countertop). Position template on wall in desired location per room layout drawing
2. Stubs for water, air, and vacuum can be placed anywhere within the bold line perimeters. Recommended locations have been indicated.

39"

1"

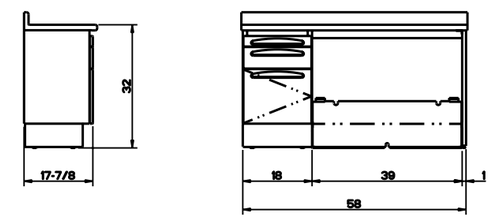

END VIEW

FRONT VIEW

Doctor's Plumbing Specifications

1. WATER: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Water pressure NOT to exceed 50 psi.
2. AIR: 3/4" diameter hole required for 1/2" NPT pipe stub. Stub to extend 1" min. / 2-1/2" max. from finished wall surface. Install manual shut-off valve (supplied). Flush all debris from line before installing valve. Air pressure to be 80 psi (min.) to 100 psi (max.).
3. VACUUM: Plumbing to the casework should be specified by central vacuum supplier. Drill hole in wall as required. Extend pipe stub 1" min. / 2-1/2" max. from finished wall surface. Terminate plumbing with a 5/8" OD tubing connector.

MIDMARK®
Midmark Corporation, P.O. Box 286, 60 Vista Drive
Versailles, Ohio 45380-0286, www.midmark.com
1-800-MIDMARK (1-800-643-6275), FAX 937-526-8247

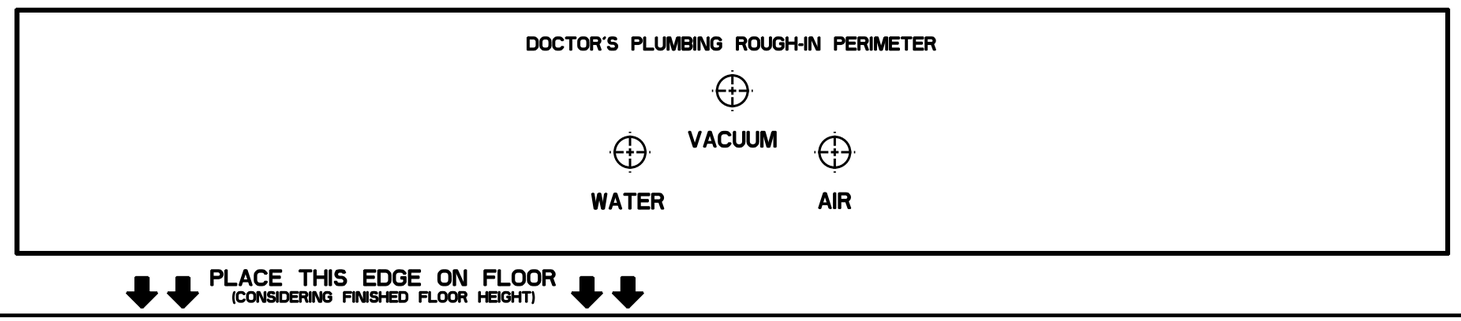

WALL PLUMBING LAYOUT

DM-SDR012, DM-SDR012SS
DK-SDL012, DK-SDL012SS
Long Arm Side Delivery Casework
Left Hand Storage

003-1009-00 Rev. C

NAME: DLANGENKAMP OBJECT: 003-1009-00_2 DATE: 24-JUL-01 13:48:39

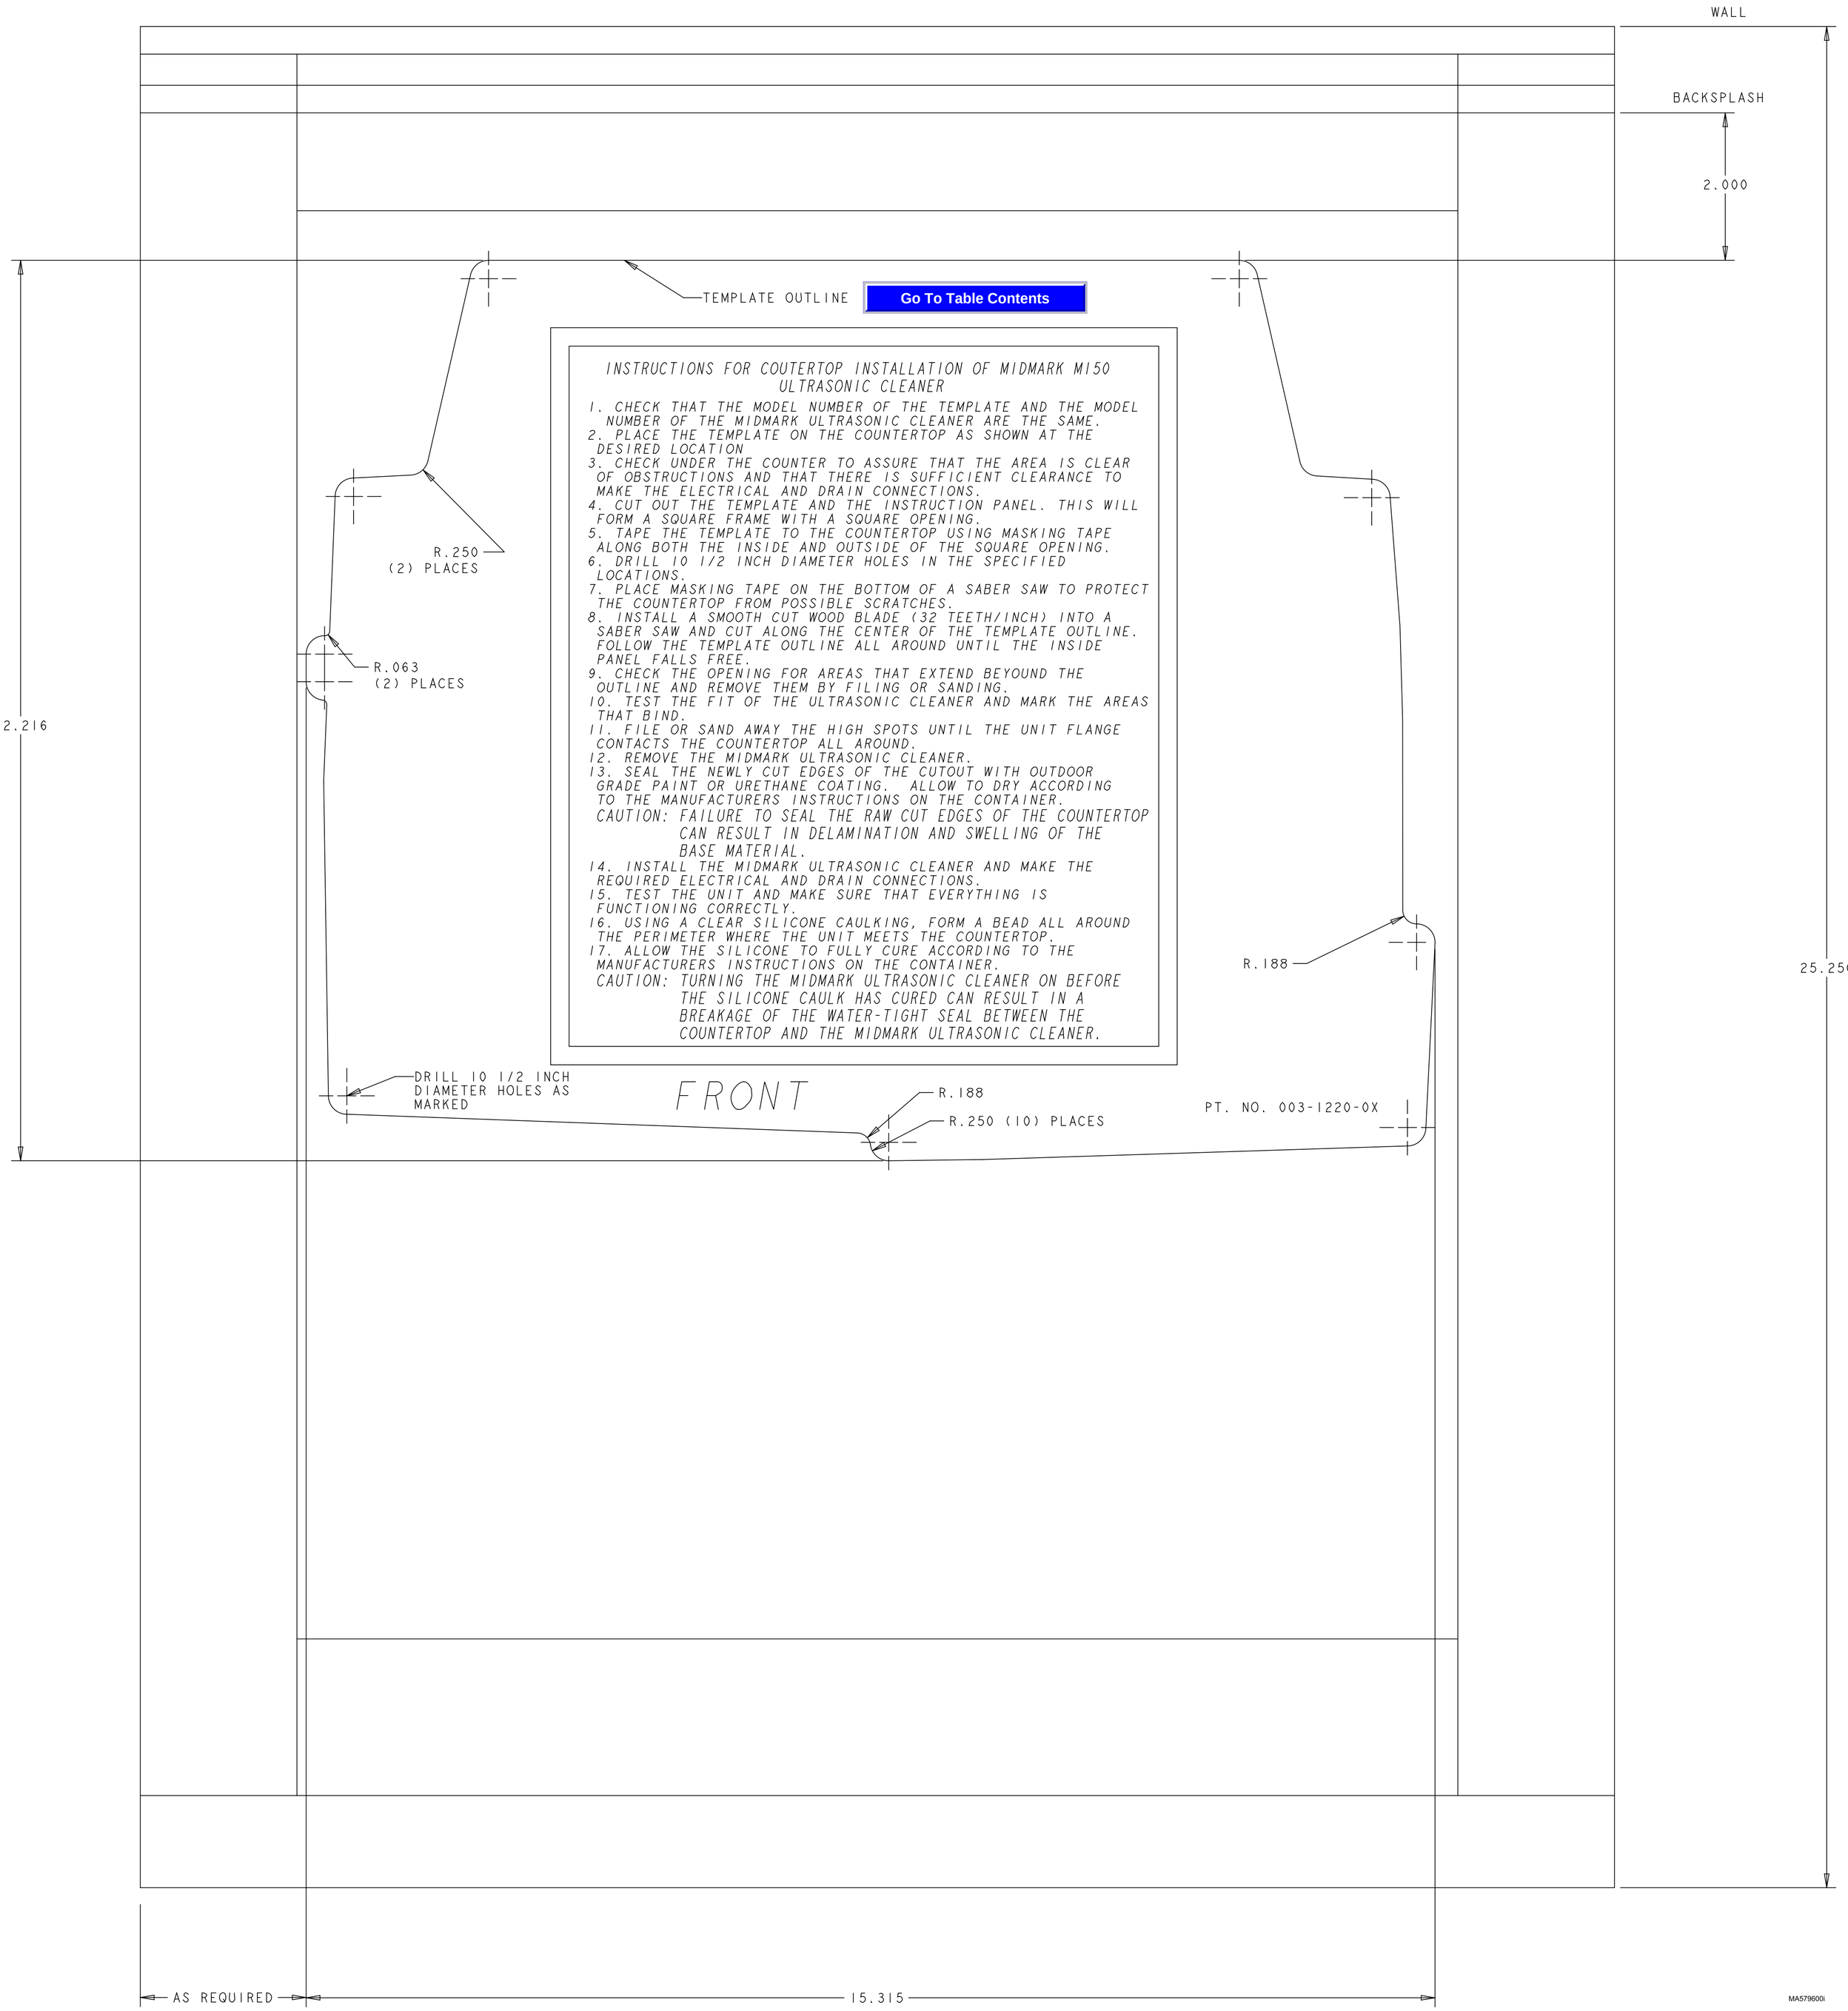

Go To Table Contents

INSTRUCTIONS FOR COUTERTOP INSTALLATION OF MIDMARK M150 ULTRASONIC CLEANER

1. CHECK THAT THE MODEL NUMBER OF THE TEMPLATE AND THE MODEL NUMBER OF THE MIDMARK ULTRASONIC CLEANER ARE THE SAME.
2. PLACE THE TEMPLATE ON THE COUNTERTOP AS SHOWN AT THE DESIRED LOCATION
3. CHECK UNDER THE COUNTER TO ASSURE THAT THE AREA IS CLEAR OF OBSTRUCTIONS AND THAT THERE IS SUFFICIENT CLEARANCE TO MAKE THE ELECTRICAL AND DRAIN CONNECTIONS.
4. CUT OUT THE TEMPLATE AND THE INSTRUCTION PANEL. THIS WILL FORM A SQUARE FRAME WITH A SQUARE OPENING.
5. TAPE THE TEMPLATE TO THE COUNTERTOP USING MASKING TAPE ALONG BOTH THE INSIDE AND OUTSIDE OF THE SQUARE OPENING.
6. DRILL 10 1/2 INCH DIAMETER HOLES IN THE SPECIFIED LOCATIONS.
7. PLACE MASKING TAPE ON THE BOTTOM OF A SABER SAW TO PROTECT THE COUNTERTOP FROM POSSIBLE SCRATCHES.
8. INSTALL A SMOOTH CUT WOOD BLADE (32 TEETH/INCH) INTO A SABER SAW AND CUT ALONG THE CENTER OF THE TEMPLATE OUTLINE. FOLLOW THE TEMPLATE OUTLINE ALL AROUND UNTIL THE INSIDE PANEL FALLS FREE.
9. CHECK THE OPENING FOR AREAS THAT EXTEND BEYOUND THE OUTLINE AND REMOVE THEM BY FILING OR SANDING.
10. TEST THE FIT OF THE ULTRASONIC CLEANER AND MARK THE AREAS THAT BIND.
11. FILE OR SAND AWAY THE HIGH SPOTS UNTIL THE UNIT FLANGE CONTACTS THE COUNTERTOP ALL AROUND.
12. REMOVE THE MIDMARK ULTRASONIC CLEANER.
13. SEAL THE NEWLY CUT EDGES OF THE CUTOUT WITH OUTDOOR GRADE PAINT OR URETHANE COATING. ALLOW TO DRY ACCORDING TO THE MANUFACTURERS INSTRUCTIONS ON THE CONTAINER.
    CAUTION: FAILURE TO SEAL THE RAW CUT EDGES OF THE COUNTERTOP CAN RESULT IN DELAMINATION AND SWELLING OF THE BASE MATERIAL.
14. INSTALL THE MIDMARK ULTRASONIC CLEANER AND MAKE THE REQUIRED ELECTRICAL AND DRAIN CONNECTIONS.
15. TEST THE UNIT AND MAKE SURE THAT EVERYTHING IS FUNCTIONING CORRECTLY.
16. USING A CLEAR SILICONE CAULKING, FORM A BEAD ALL AROUND THE PERIMETER WHERE THE UNIT MEETS THE COUNTERTOP.
17. ALLOW THE SILICONE TO FULLY CURE ACCORDING TO THE MANUFACTURERS INSTRUCTIONS ON THE CONTAINER.
    CAUTION: TURNING THE MIDMARK ULTRASONIC CLEANER ON BEFORE THE SILICONE CAULK HAS CURED CAN RESULT IN A BREAKAGE OF THE WATER-TIGHT SEAL BETWEEN THE COUNTERTOP AND THE MIDMARK ULTRASONIC CLEANER.

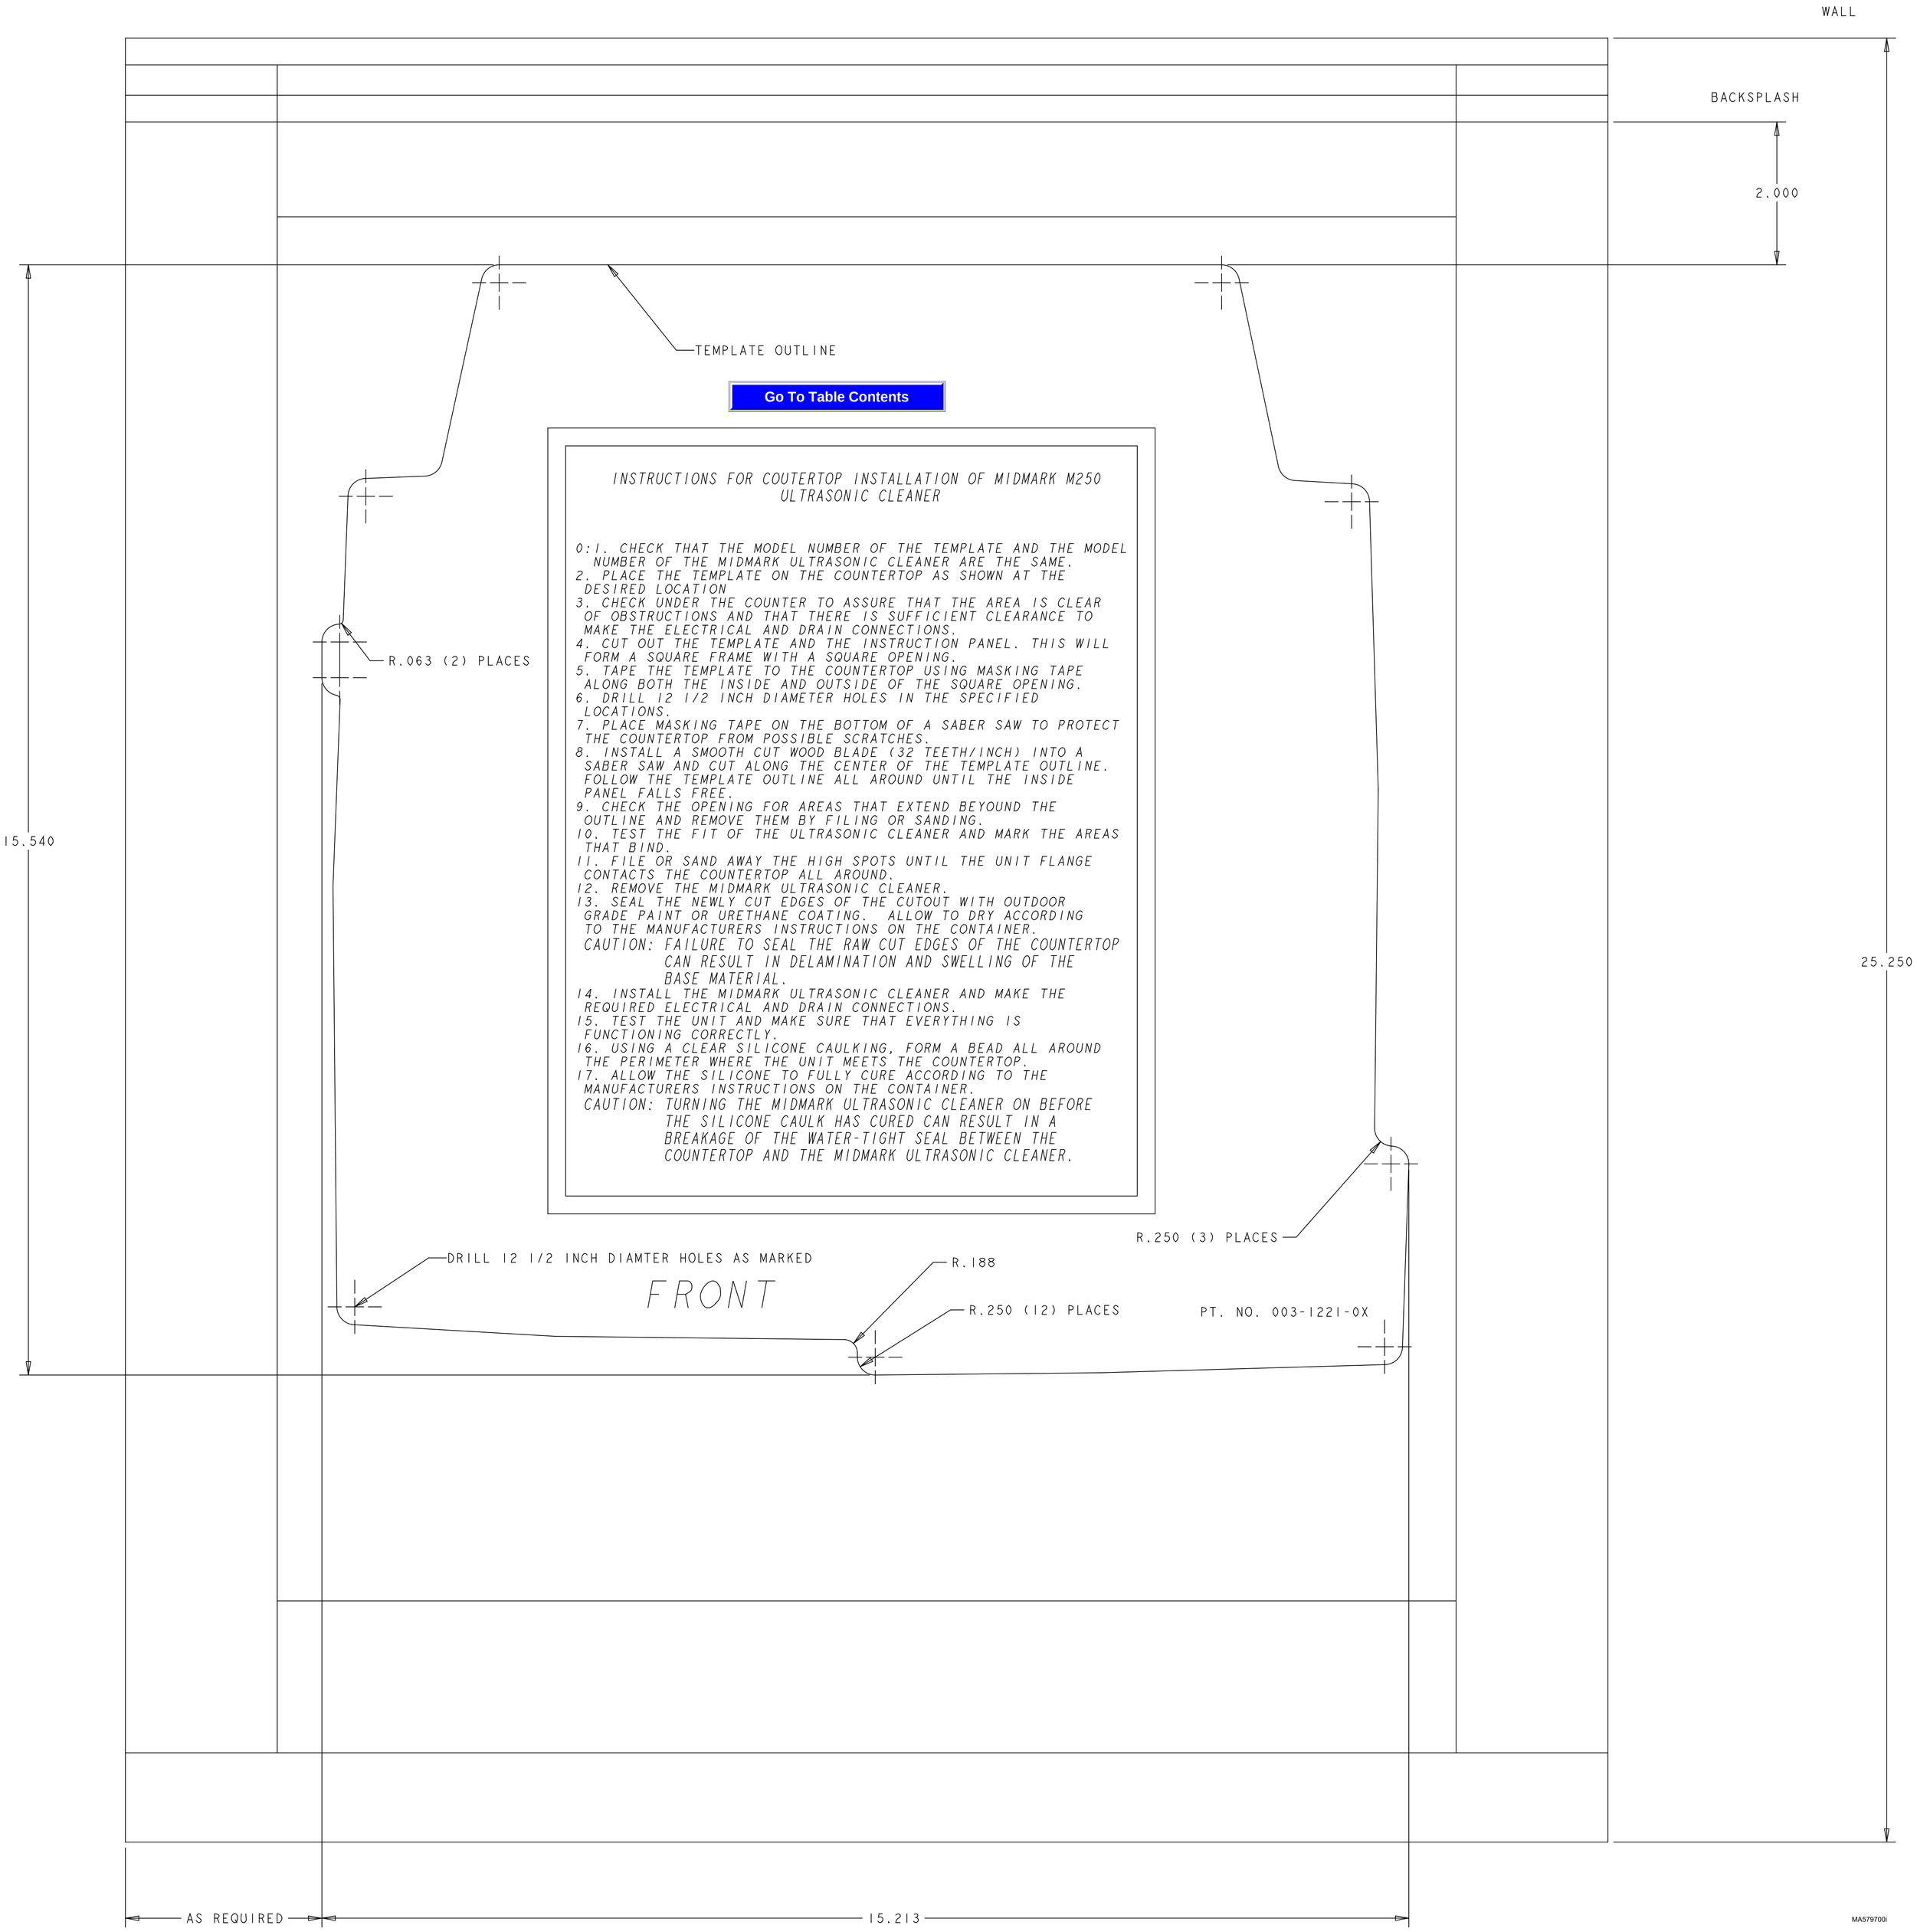

Go To Table Contents

INSTRUCTIONS FOR COUTERTOP INSTALLATION OF MIDMARK M250 ULTRASONIC CLEANER

0:1. CHECK THAT THE MODEL NUMBER OF THE TEMPLATE AND THE MODEL NUMBER OF THE MIDMARK ULTRASONIC CLEANER ARE THE SAME.
2. PLACE THE TEMPLATE ON THE COUNTERTOP AS SHOWN AT THE DESIRED LOCATION
3. CHECK UNDER THE COUNTER TO ASSURE THAT THE AREA IS CLEAR OF OBSTRUCTIONS AND THAT THERE IS SUFFICIENT CLEARANCE TO MAKE THE ELECTRICAL AND DRAIN CONNECTIONS.
4. CUT OUT THE TEMPLATE AND THE INSTRUCTION PANEL. THIS WILL FORM A SQUARE FRAME WITH A SQUARE OPENING.
5. TAPE THE TEMPLATE TO THE COUNTERTOP USING MASKING TAPE ALONG BOTH THE INSIDE AND OUTSIDE OF THE SQUARE OPENING.
6. DRILL 12 1/2 INCH DIAMETER HOLES IN THE SPECIFIED LOCATIONS.
7. PLACE MASKING TAPE ON THE BOTTOM OF A SABER SAW TO PROTECT THE COUNTERTOP FROM POSSIBLE SCRATCHES.
8. INSTALL A SMOOTH CUT WOOD BLADE (32 TEETH/INCH) INTO A SABER SAW AND CUT ALONG THE CENTER OF THE TEMPLATE OUTLINE. FOLLOW THE TEMPLATE OUTLINE ALL AROUND UNTIL THE INSIDE PANEL FALLS FREE.
9. CHECK THE OPENING FOR AREAS THAT EXTEND BEYOUND THE OUTLINE AND REMOVE THEM BY FILING OR SANDING.
10. TEST THE FIT OF THE ULTRASONIC CLEANER AND MARK THE AREAS THAT BIND.
11. FILE OR SAND AWAY THE HIGH SPOTS UNTIL THE UNIT FLANGE CONTACTS THE COUNTERTOP ALL AROUND.
12. REMOVE THE MIDMARK ULTRASONIC CLEANER.
13. SEAL THE NEWLY CUT EDGES OF THE CUTOUT WITH OUTDOOR GRADE PAINT OR URETHANE COATING. ALLOW TO DRY ACCORDING TO THE MANUFACTURERS INSTRUCTIONS ON THE CONTAINER.
CAUTION: FAILURE TO SEAL THE RAW CUT EDGES OF THE COUNTERTOP CAN RESULT IN DELAMINATION AND SWELLING OF THE BASE MATERIAL.
14. INSTALL THE MIDMARK ULTRASONIC CLEANER AND MAKE THE REQUIRED ELECTRICAL AND DRAIN CONNECTIONS.
15. TEST THE UNIT AND MAKE SURE THAT EVERYTHING IS FUNCTIONING CORRECTLY.
16. USING A CLEAR SILICONE CAULKING, FORM A BEAD ALL AROUND THE PERIMETER WHERE THE UNIT MEETS THE COUNTERTOP.
17. ALLOW THE SILICONE TO FULLY CURE ACCORDING TO THE MANUFACTURERS INSTRUCTIONS ON THE CONTAINER.
CAUTION: TURNING THE MIDMARK ULTRASONIC CLEANER ON BEFORE THE SILICONE CAULK HAS CURED CAN RESULT IN A BREAKAGE OF THE WATER-TIGHT SEAL BETWEEN THE COUNTERTOP AND THE MIDMARK ULTRASONIC CLEANER.

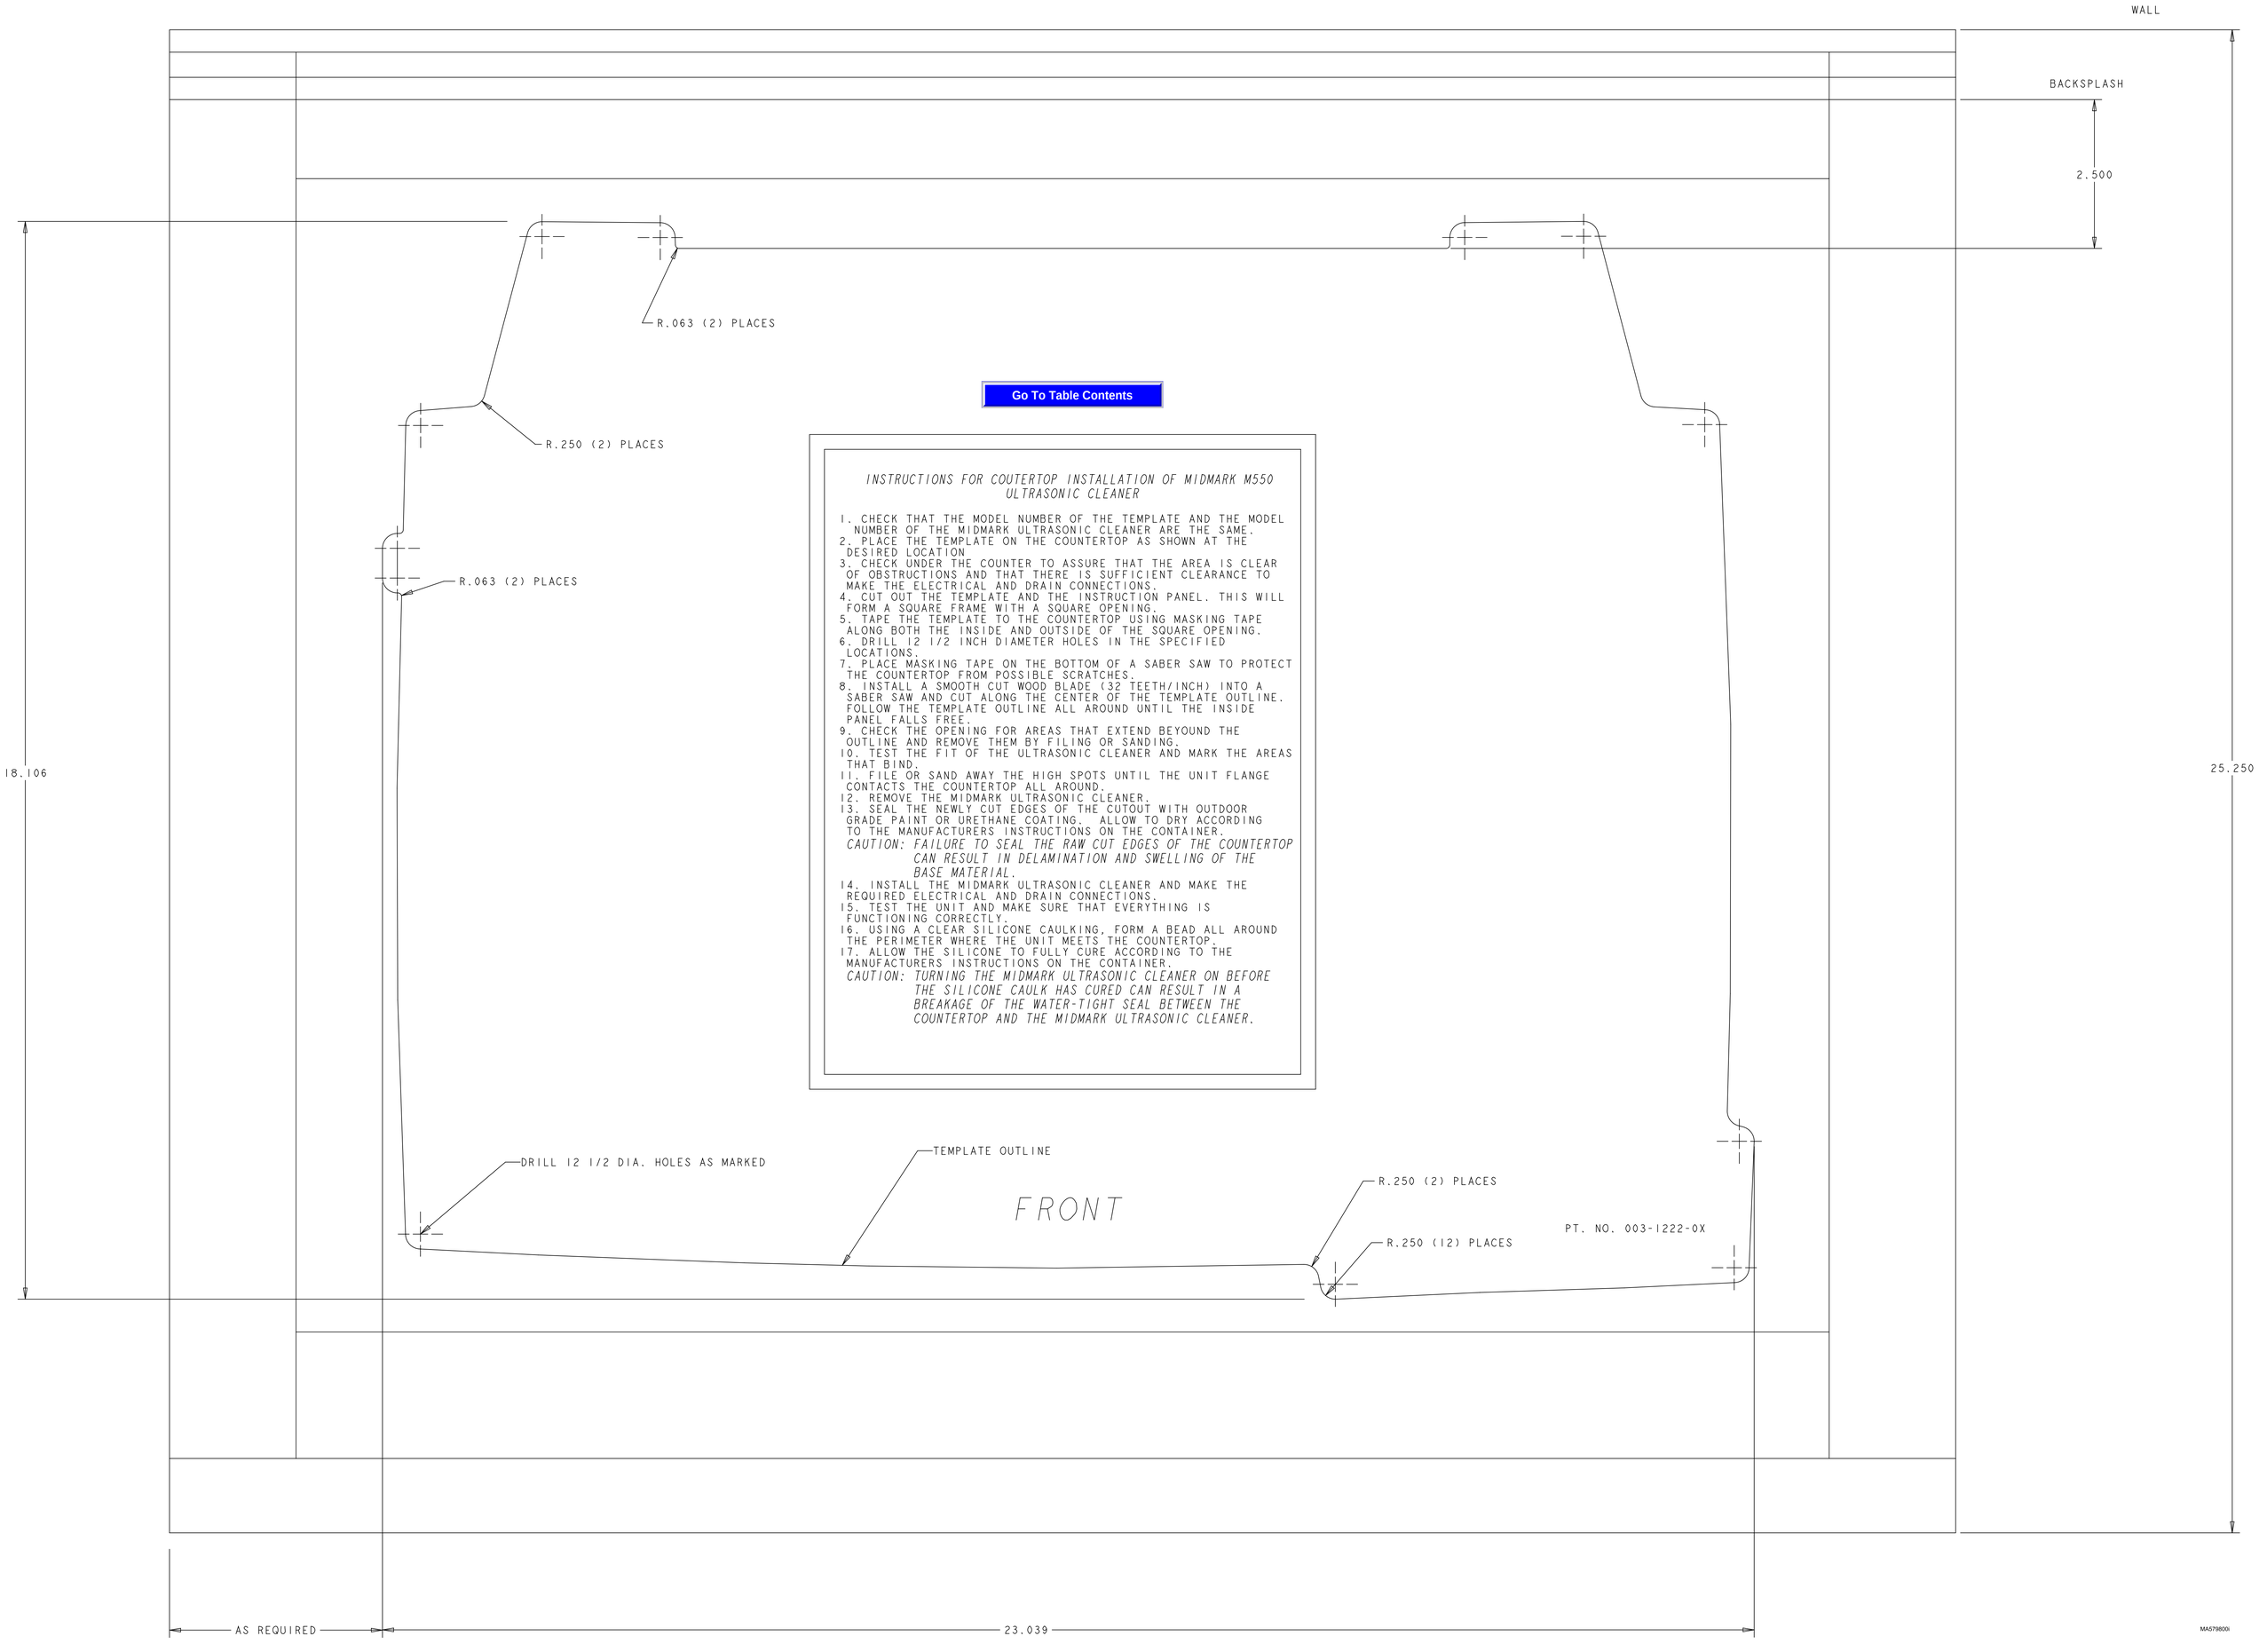

Go To Table Contents

INSTRUCTIONS FOR COUTERTOP INSTALLATION OF MIDMARK M550 ULTRASONIC CLEANER

1. CHECK THAT THE MODEL NUMBER OF THE TEMPLATE AND THE MODEL NUMBER OF THE MIDMARK ULTRASONIC CLEANER ARE THE SAME.
2. PLACE THE TEMPLATE ON THE COUNTERTOP AS SHOWN AT THE DESIRED LOCATION.
3. CHECK UNDER THE COUNTER TO ASSURE THAT THE AREA IS CLEAR OF OBSTRUCTIONS AND THAT THERE IS SUFFICIENT CLEARANCE TO MAKE THE ELECTRICAL AND DRAIN CONNECTIONS.
4. CUT OUT THE TEMPLATE AND THE INSTRUCTION PANEL. THIS WILL FORM A SQUARE FRAME WITH A SQUARE OPENING.
5. TAPE THE TEMPLATE TO THE COUNTERTOP USING MASKING TAPE ALONG BOTH THE INSIDE AND OUTSIDE OF THE SQUARE OPENING.
6. DRILL 12 1/2 INCH DIAMETER HOLES IN THE SPECIFIED LOCATIONS.
7. PLACE MASKING TAPE ON THE BOTTOM OF A SABER SAW TO PROTECT THE COUNTERTOP FROM POSSIBLE SCRATCHES.
8. INSTALL A SMOOTH CUT WOOD BLADE (32 TEETH/INCH) INTO A SABER SAW AND CUT ALONG THE CENTER OF THE TEMPLATE OUTLINE. FOLLOW THE TEMPLATE OUTLINE ALL AROUND UNTIL THE INSIDE PANEL FALLS FREE.
9. CHECK THE OPENING FOR AREAS THAT EXTEND BEYOUND THE OUTLINE AND REMOVE THEM BY FILING OR SANDING.
10. TEST THE FIT OF THE ULTRASONIC CLEANER AND MARK THE AREAS THAT BIND.
11. FILE OR SAND AWAY THE HIGH SPOTS UNTIL THE UNIT FLANGE CONTACTS THE COUNTERTOP ALL AROUND.
12. REMOVE THE MIDMARK ULTRASONIC CLEANER.
13. SEAL THE NEWLY CUT EDGES OF THE CUTOUT WITH OUTDOOR GRADE PAINT OR URETHANE COATING. ALLOW TO DRY ACCORDING TO THE MANUFACTURERS INSTRUCTIONS ON THE CONTAINER.
    CAUTION: FAILURE TO SEAL THE RAW CUT EDGES OF THE COUNTERTOP CAN RESULT IN DELAMINATION AND SWELLING OF THE BASE MATERIAL.
14. INSTALL THE MIDMARK ULTRASONIC CLEANER AND MAKE THE REQUIRED ELECTRICAL AND DRAIN CONNECTIONS.
15. TEST THE UNIT AND MAKE SURE THAT EVERYTHING IS FUNCTIONING CORRECTLY.
16. USING A CLEAR SILICONE CAULKING, FORM A BEAD ALL AROUND THE PERIMETER WHERE THE UNIT MEETS THE COUNTERTOP.
17. ALLOW THE SILICONE TO FULLY CURE ACCORDING TO THE MANUFACTURERS INSTRUCTIONS ON THE CONTAINER.
    CAUTION: TURNING THE MIDMARK ULTRASONIC CLEANER ON BEFORE THE SILICONE CAULK HAS CURED CAN RESULT IN A BREAKAGE OF THE WATER-TIGHT SEAL BETWEEN THE COUNTERTOP AND THE MIDMARK ULTRASONIC CLEANER.

MIDMARK
DENTAL OPERATORY CHAIR LAYOUT
INSTALLATION TEMPLATE (003-1199-00 Rev. A1)



IMPORTANT INFORMATION:
This drawing represents dimensions that only apply to chairs equipped with "Console" delivery units.



IMPORTANT INFORMATION:
This drawing represents dimensions that only apply to chairs equipped with "L/R" delivery units.

Go To Table Contents

30° Console

15° L/R

15° L/R

30° Console

Umbilical

14.5"
(36.8cm)

7.74"
(19.7cm)

15.48"
(39.3cm)

15.48"
(39.3cm)

16.25"
(41.3cm)

Universal Power Supply

Vacuum

Electrical

1"
(2.5cm)

Water

2"
(5.1cm)

4.75"
(12.1cm)

1.5"
(3.8cm)

1.75"
(4.4cm)

Drain

4.25"
(10.8cm)

8.12"
(20.6cm)

Air

7.74"
(19.7cm)

0.25"
(0.6cm)

13.5"
(34.3cm)

Junction Box Floor Template
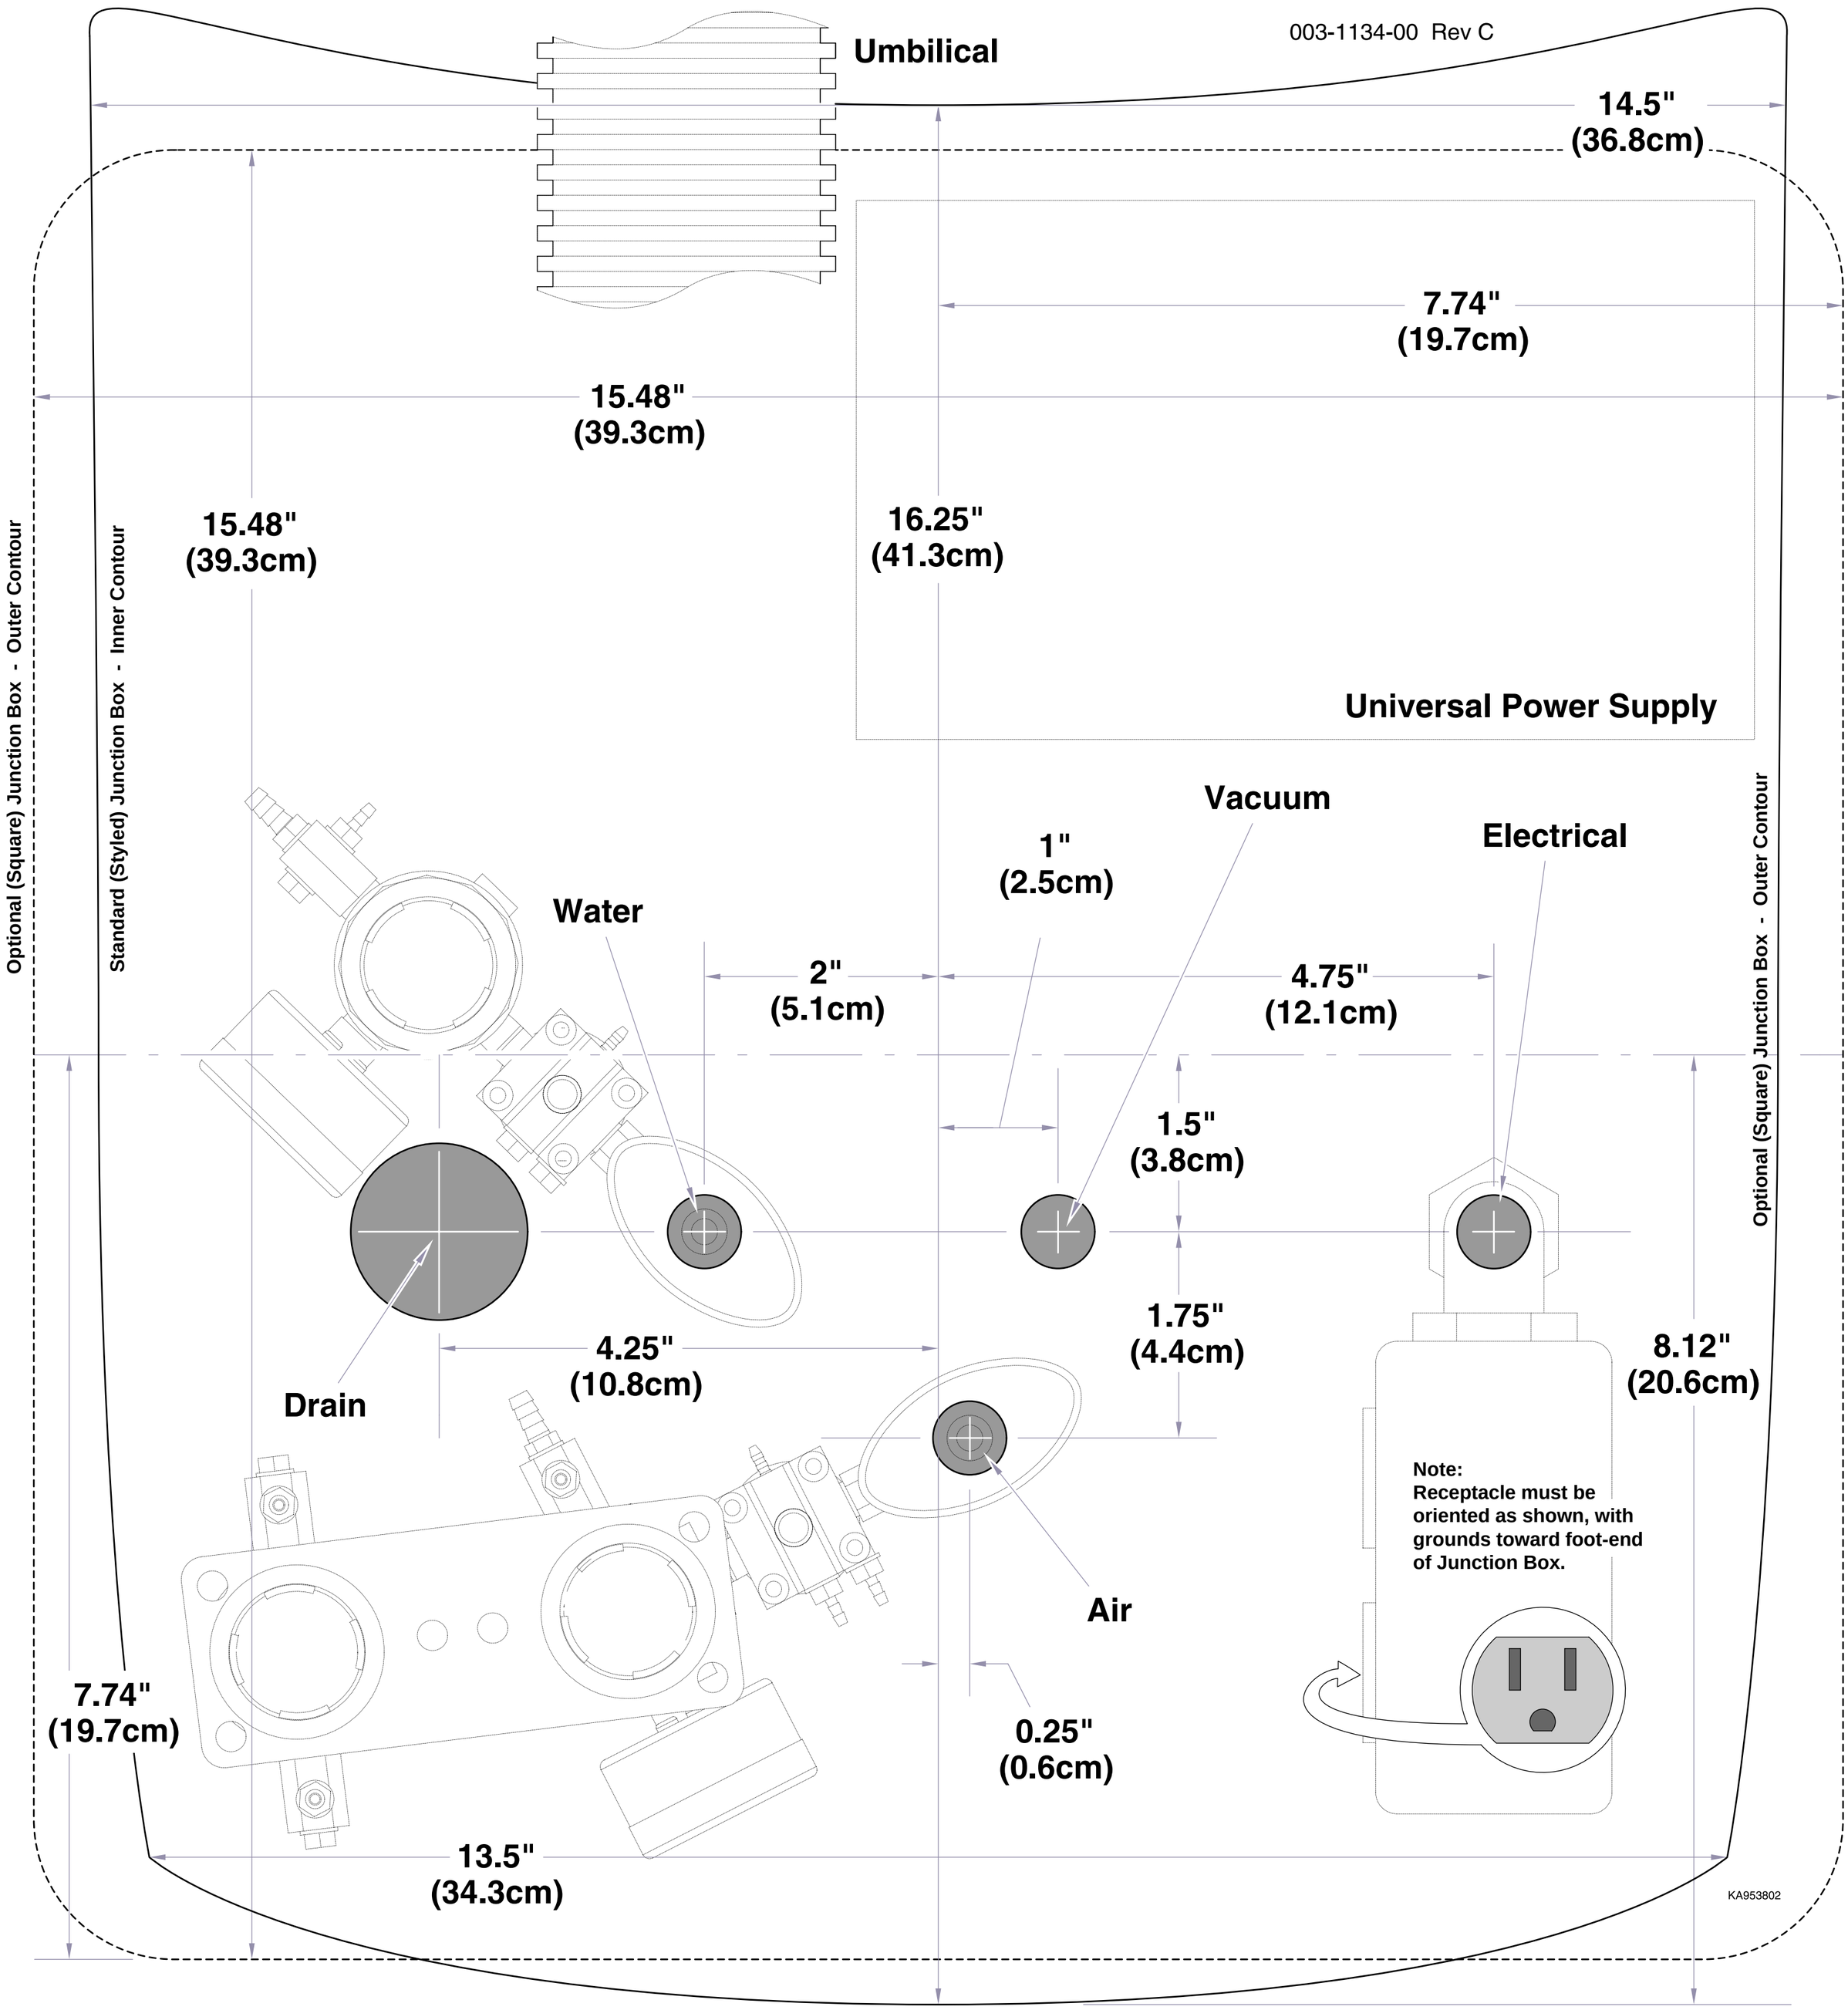
Go To Table Contents